
# Ralotherm Infrared Lamp with metal lug

ITT 1000W 235V-08X0



Product Datasheet Date: 05.11.2025



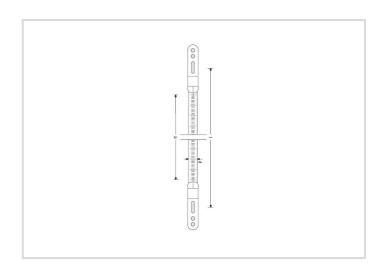







2350K

5 000h

Dimmbar

## **General Data**

Artikel Nr.	24317327
Bestellzeichen	ITT 1000W 235V-08X0
EAN-Faltschachtel	4008597173271
Versandeinheit in Stk.	12
EAN Umkarton (Versandeinheit)	4008597473272
Brutto-Gewicht Versandeinheit in kg	2.852
Länge Versandeinheit in m	0.66
Breite Versandeinheit in m	0.19
Höhe Versandeinheit in m	0.15
Product weight	26 g
Produktstatus	Aktiv

## **Electric Parameters**

Lamp power	1,000.0 W
Weighted energy consumption in 1000 hours	1000 kWh
Lamp voltage	235-235 V
Nominal current (A)	4,3 A

## Ralotherm Infrared Lamp with metal lug

ITT 1000W 235V-08X0



### **Light Application Parameters**

Color temperature 2350 K

#### **Service Life**

Average life 5000 h

## **Specification**

Diameter	10 mm
Length max.	365 mm
Total length max.	365 mm
Burning position	p15
Lamp shape	Other
Base	Metal lug

## **Notes on Operation**

Burning position	21a	

#### Notes

Highly efficient infrared lamp for mains voltage 235V, double ended, controllable, long service life, no ramp-up-time - quick heating up

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

#### Spektrale Strahlungsverteilung

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

Incandescent an halogen lamps emit a continuous red-dominated spectrum of electromagnetic radiation as it is generated by heating up a tungsten filament. The wavelength range of visisble light reaches from 380 to 780 nm, above (longer wavelength) there is infrared radiation which can be used for targeted heat generation.

The addition of halogens to the filling gas enhances the efficiency and prevents blackening. Further increase in effiency can be achieved by adding Xenon and/or specific coating.

#### Besonderheiten



#### Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit,

## Ralotherm Infrared Lamp with metal lug

ITT 1000W 235V-08X0



we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.