
NL-T8 36W/840/G13



Product Datasheet Date: 04.11.2025





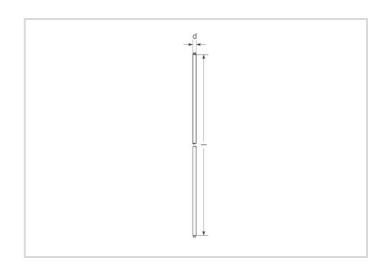









3350

4000K

20 000h Dimmbar

### **General Data**

| Artikel Nr.                         | 31109316          |
|-------------------------------------|-------------------|
| Bestellzeichen                      | NL-T8 36W/840/G13 |
| EAN-Faltschachtel                   | 4008597093166     |
| Versandeinheit in Stk.              | 25                |
| EAN Umkarton (Versandeinheit)       | 4008597493164     |
| Brutto-Gewicht Versandeinheit in kg | 4.66              |
| Länge Versandeinheit in m           | 1.24              |
| Breite Versandeinheit in m          | 0.153             |
| Höhe Versandeinheit in m            | 0.147             |
| Product weight                      | 149 g             |
| Produktstatus                       | Inaktiv           |

## **Electric Parameters**

| Wattage              | 36.0 W |
|----------------------|--------|
| Lamp nominal wattage | 36 W   |
| Lamp voltage         | 103 V  |
| Mains voltage        | 230 V  |
| Nominal current (mA) | 430 mA |

NL-T8 36W/840/G13



## **Electric Parameters**

| Compensation capacitor for 50Hz operation | 4.5 μF |  |
|---|--------|--|
| dimmable                                  | Ja     |  |

# **Light Application Parameters**

| Luminous flux               | 3350 lm    |
|-----------------------------|------------|
| Rated lamp luminous flux    | 3350 lm    |
| max. luminous flux at       | 25 °C      |
| Beam angle                  | 360 °      |
| Efficacy                    | 93.06 lm/W |
| Total mains efficacy        | 93 lm/W    |
| Light colour                | white      |
| Code of light color         | 840        |
| Colour temperature          | 4000 K     |
| Color rendering index       | ? 80       |
| Mean luminance              | 1.2        |
| Lumen maintenance at 2000h  | 0.96       |
| Lumen maintenance at 4000h  | 0.94       |
| Lumen maintenance at 6000h  | 0.93       |
| Lumen maintenance at 8000h  | 0.91       |
| Lumen maintenance at 12000h | 0.91       |
| Lumen maintenance at 16000h | 0.90       |
| Lumen maintenance at 20000h | 0.89       |

### **Service Life**

| Average life                   | 20000 h |
|--------------------------------|---------|
| Mean service life, HF 3h cycle | 20000 h |
| Lamp survival factor at 2000h  | 0.99    |
| Lamp survival factor at 4000h  | 0.99    |
| Lamp survival factor at 6000h  | 0.99    |
| Lamp survival factor at 8000h  | 0.99    |
| Lamp survival factor at 12000h | 0.99    |
| Lamp survival factor at 16000h | 0.90    |
| Lamp survival factor at 20000h | 0.50    |

NL-T8 36W/840/G13



### **Specification**

| Energylabel notice   | old label, no EPREL registration, no EU data sheet |
|----------------------|--|
| Energylabel (G -> A) | F  |
| Diameter max.        | 26 mm  |
| Tube diameter        | 26 mm  |
| Length               | 1200 mm  |
| Length               | 1200 mm  |
| Mercury content      | 2.5 mg   |
| Lamp shape           | Rod  |
| Base                 | G13  |
| Colour               | White  |

### Information especially for EPREL

| Energylabel notice | old label, no EPREL registration, no EU data sheet |
|--------------------|--|
| EPREL ID number    | 863768   |

#### Miscellaneous

| EU-date of phase-out | 25.08.2023 |
|----------------------|------------|
| EU Directive         | RoHS       |

#### **Notes**

Fluorescent lamp T8 - 26mm diameter, light colour 840, high luminous efficiency, good colour rendering, long life, base G13. Controllable by Dim-ECG.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

#### Sockelübersicht



IEC/EN 60061-1 sheet 7004-51-8


#### Spektrale Strahlungsverteilung

Natural daylight is a mixture of direct sunlight and the light of the sky. Therefore, its spectral composition changes permanently due to the changing time of day. The standardised light classification D65 corresponds to a daylight with a colour temperature of approximately 6500 K. Every fluorescent lamp type has got an individual spectral power distribution according to its phosphor coating inside the bulb. From this result important properties light colour or colour rendering.


Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm) per 10nm.

NL-T8 36W/840/G13






light colour 840 Spectralux® white (21)



daylight(D 65)

#### Schaltbeispiel(e)



One-lampe ciruit inductive

Key:

D = choke

L. = lamp

St = starter


VG = electromagnetic ballast (KVG/VVG)

P = phase

N = zero potential

K = p. f. correction capacitor

The required control gear (here starter and ballast) for the lamps operation is usually mounted in the suitable luminaire in an appropriate electric circuit. Changes of any kind are to be conducted by qualified and specialised staff, only. Thus, this circuit example is to be understood merely as a technical background information for interested users.



One-lampe ciruit with electronic ballast

Kev.

VG = ballast electronic (ECG)


P = phase

N = zero potential

Ctrl = Controller, dimmer

The required control gear (here electronic ballast) for the lamps operation is usually mounted in the suitable luminaire in an appropriate electric circuit. Changes of any kind are to be conducted by qualified and specialised staff, only. Thus, this circuit example is to be understood merely as a technical

background information for interested users.



One-lampe ciruit with electronic ballast

Key:

VG = ballast electronic (ECG)


P = phase

N = zero potential

Ctrl = Controller, dimmer

The required control gear (here electronic ballast) for the lamps operation is usually mounted in the suitable luminaire in an appropriate electric circuit. Changes of any kind are to be conducted by qualified and specialised staff, only. Thus, this circuit example is to be understood merely as a technical

background information for interested users.



One-lampe ciruit with electronic ballast

Key:

VG = ballast electronic (ECG)

P = phase

N = zero potential


Ctrl = Controller, dimmer

The required control gear (here electronic ballast) for the lamps operation is usually mounted in the suitable luminaire in an appropriate electric circuit. Changes of any kind are to be conducted by qualified and specialised staff, only. Thus, this circuit example is to be understood merely as a technical

background information for interested users.

NL-T8 36W/840/G13





Three phase current connection

Key:

D = choke

L. = lamp

St = starter

VG = ballast electromagnetic (KVG/VVG)

P = phase

N = zero potential

K = p. f. correction capacitor

The required control gear (here starter and ballast) for the lamps operation is usually mounted in the suitable luminaire in an appropriate electric circuit. Changes of any kind are to be conducted by qualified and specialised staff, only. Thus, this circuit example is to be understood merely as a technical background information for interested users.

#### Besonderheiten





#### Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.