
LED driver DALI/DMX

DRIVER DALI/DMX 4CH 150W/24V IP20 RADIUM

Radium

Product Datasheet Date: 11.11.2026

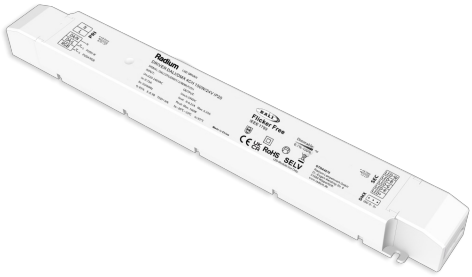

General Data

Artikel Nr.	OTDA4076
Bestellzeichen	DRIVER DALI/DMX 4CH 150W/24V IP20 RADIUM
EAN-Faltschachtel	4003556011038
Versandeinheit in Stk.	20
EAN Umkarton (Versandeinheit)	4003556411036
Brutto-Gewicht Versandeinheit in kg	9.6
Länge Versandeinheit in m	0.362
Breite Versandeinheit in m	0.34
Höhe Versandeinheit in m	0.093
Product weight	400 g
Produktstatus	Aktiv

Electric Parameters

Rated value output power max.	150.0 W
Output power	0-150.0 W
Power factor	≥0,98
Output Voltage	24 V
Output voltage	23.5-24.5 V
Surge voltage resistance (L - N)	2 kV
Number of Channels	4
Supply frequency	50/60 Hz
dimmable	Ja
Dimming with push-button	Ja

LED driver DALI/DMX

DRIVER DALI/DMX 4CH 150W/24V IP20 RADIUM

Electric Parameters

Dimming interface	DALI
DALI Device Type	DT6

Service Life

Service life	50000 h
Tc Temperature max.	85 °C

Specification

Mean efficiency	93 %
Length	352 mm
Height max.	30 mm
Width	43 mm
Model	Static
Material	Plastic

Notes on Operation

Degree of protection (IP)	IP20
Protection class	II
Type of connection	screw clamp
Ambient temperatures	-25…+50 °C
Tc Temperature max.	85 °C

Miscellaneous

Similar products	OTDA4150, OTDA4106

Notes

4 channel constant voltage supply 24V for up to 150W LED load, control via DALI DT6 or DMX, for indoor applications

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Besonderheiten



LED driver DALI/DMX

DRIVER DALI/DMX 4CH 150W/24V IP20 RADIUM

Allgemeine Hinweise

* If the light sources in Push-Dim operation can no longer be switched at the same time or dimmed evenly when operating the lighting system with SEVERAL drivers on ONE switch button, the system works asynchronously and can be synchronized again using a RESET routine:
1. Step: LONG press (> 0.5 s) => all lights switch ON
2. Step: SHORT press (< 0.5 s) => all lights switch OFF
3. Step: LONG press (> 0.5 s) => all lights switch ON and dim
[4. Step: Double click => save dimming setting (optional)]
The drivers then behave synchronously again.

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.
® = Registered trademark
Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.