

F	10	1000	4000K	5 m	

## General Data

Article No.	RSTA4263
Code	LED STRIP 1000ZP EH 940/24V 3M
Product EAN	4003556011533
Box quantity (pcs.)	8
EAN Box	4003556411531
Gross weight of box in kg	1.375
Length of box in m	0.265
Width of box in m	0.175
Height of box in m	0.181
Product weight	104 g
Product status	Active

## Electric Parameters

Max. system power	50.0 W
Watt per metre	10 W/m
Energy consumption kWh/1000h	30
Lamp voltage	24 V
Voltage type	DC

## Electric Parameters

Number of poles	2
dimmable	Yes
Dimmable with fitting driver	Yes

## Light Application Parameters

Lum. flux / Meter	1000 lm/m
Beam angle	180 °
Efficacy	100 lm/W
Total mains efficacy	93 lm/W
Colour of light	White
Code of light color	940
Color temperature	4000 K
Color coordinate X	0,382
Color coordinate Y	0,384
Color rendering index	90
Color Stability	≤ 5 sdcM

## Service Life

Mean service life	50000 h
Lifetime L70B50	50000 h
Guarantee	5 years

## Specification

Energylabel (G -> A)	F
Length	3000 mm
Height/depth	2,2 mm
Width	10 mm
No. of LEDs per meter	480
Length of particular segments	50 mm
Length feed-in cable	250 mm
Supply line on both sides	Yes
Model	Strip
Self-adhesive	Yes

## Notes on Operation

Degree of protection (IP)	IP20
max. operable length	5 m

## Notes on Operation

Connection type	Blade terminal
Type of connection	Cable and plug in delivery
Permissible storage temperature	-30 °C - +80 °C
Ambient temperatures	-20 ... +50°C
Mounting method	Built-in
Type of control gear	LED operating device voltage-controlled
Suitable Accessories	FXZA4510, FXZA4950, FXZA4380

## Information especially for EPREL

Lighting technology	LED
Mains/Non mains connectable	NMLS
Directional or non-directional light	NDLS
Color tunable light source	No
Type of color temperature	SINGLE_VALUE
EPREL ID number	1816666

## Miscellaneous

Similar products	RSTA4253, RSTA4243, RSTA3803, RSTA4313
------------------	--

## Notes

Flexible Easy Connect LED module 1000lm/m for light lines, 25cm feed-in cable on one side, dimmable, cuttable, adhesive back, operation with 24V driver

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.



The optional field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

## Spectrum

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin. Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/kJm) per 10nm.

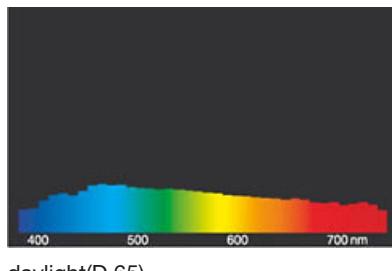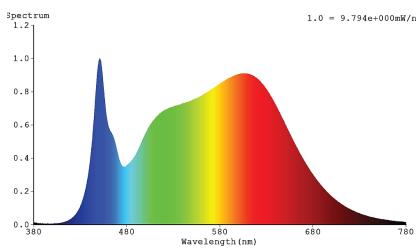

**Special features**



**General notes**

Observe safety instructions during assembly!

Please, consider also:

The LED module itself and all its components must not be stressed mechanically. The assembly must not damage or destroy conductor tracks on the circuit board. To avoid mechanical damage, the LED modules should be securely fastened to the intended ground. Pay attention to the correct polarity! A wrong polarity will not enable any light emission and may damage the LED module. Parallel connection is urgently recommended as a safe electrical operating mode. Series connection is not recommended.

When mounting on metallic or other conductive surfaces, electrical insulation must be provided at the solder joints between the module and the mounting surface. Please make sure that the LED driver has sufficient power to operate the total load. It is the responsibility of the user to provide suitable protection against corrosive substances such as moisture and condensation as well as other harmful elements.

For applications exposed to moisture and dust, the module must be protected by a device or housing with a suitable protection class.

Radium does offer pre-assembly services. With our Strip Configurator, you can cut the strips to your desired length and combine them with matching aluminum profiles or have them glued directly in, as well as choose a suitable operating device for your application. All lengths of LED strips, profiles, covers and cables are subject to standard industry tolerances and can therefore deviate.

Our team will be pleased to advise you, also regarding application and mounting questions.

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

**Safety instructions**

The LED module does not provide protection against short circuits, overloads or overheating. In order to operate LED modules safely, it is necessary to operate them with a LED driver that protects against short circuits, overloads and overheating. To simplify the luminaire / installation approval, LED drivers and LED modules must bear the CE mark. The installation of LED modules (with LED driver) must be carried out in compliance with all applicable electrical and safety standards. Only qualified personnel may perform installations.

**All technical data without guarantee.**