
RNP-T 400W/230/E40 EX

Radium

Product Datasheet Date: 15.11.2026



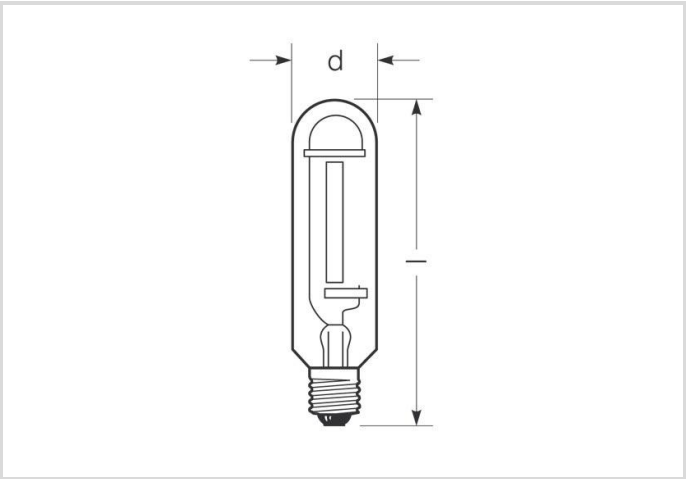

lm 48000 | 2000K | h 28 000h | Dimmable

General Data

Article No.	34417090
Codice	RNP-T 400W/230/E40 EX
Product EAN	4008597170904
Box quantitiy (pcs.)	12
EAN Box	4008597470905
Gross weight of box in kg	2.991
Length of box in m	0.269
Width of box in m	0.216
Height of box in m	0.352
Product weight	150 g
Product status	Attivo

Electric Parameters

Wattage	400.0 W
Lamp nominal wattage	400 W
Lamp voltage	100 V
Ignition voltage	3.3 up to 5.0
Lamp's nominal current	4.5 A

RNP-T 400W/230/E40 EX

Radium

Electric Parameters

Nominal choke current	4.6 A
Compensation capacitor for 50Hz operation	45 µF
Running up current max.	125%
Fuse	Daelay-action; min. double nominal current
dimmable	Sì
Controllable (in suitable circuit)	up to 50% (Run up at nominal power)

Light Application Parameters

Luminous flux	48000 lm
Rated lamp luminous flux	48000 lm
Efficacy / Luminous efficiency	122 lm/W
Total mains efficacy	122 lm/W
Colour temperature	2000 K
Color coordinate X	0,535
Color coordinate Y	0.420
Color rendering index	25
Lumen maintenance at 2000h	0.90
Lumen maintenance at 16000h	0.80

Service Life

Average life	28000 h
B5 - Service life 5% failures	12000 h
Lamp survival factor at 12000h	0.95

Specification

Diameter	47 mm
Length	285 mm
Total length max.	285 mm
Burning position	h180
Mercury content	19.6 mg
Lamp shape	Tube, single-ended
Model	Clear
Base	E40

Notes on Operation


Burning position	h180

RNP-T 400W/230/E40 EX


Notes

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Spectrum

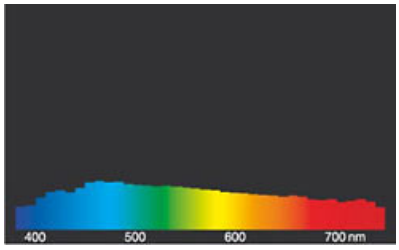

Circuit diagram(s)

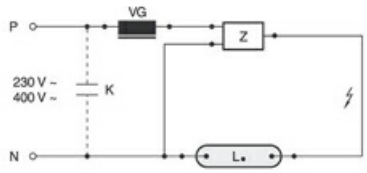

Standard circuit HID with external ignitor
Key:
L. = lamp
VG = electromagnetic ballast (KVG/VVG)
P = phase
N = zero potential
K = p. f. correction capacitor
Z = ignitor

The required control gear (here ignitor and ballast) for the lamps operation is usually mounted in the suitable luminaire in an appropriate electric circuit. Changes of any kind are to be conducted by qualified and specialised staff, only. Thus, this circuit example is to be understood merely as a technical background information for interested users.

Special features



General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.
® = Registered trademark
Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.