


# High pressure mercury lamp

HRL 700W/230/E40

# Radium

Product Datasheet Date: 20.05.2026

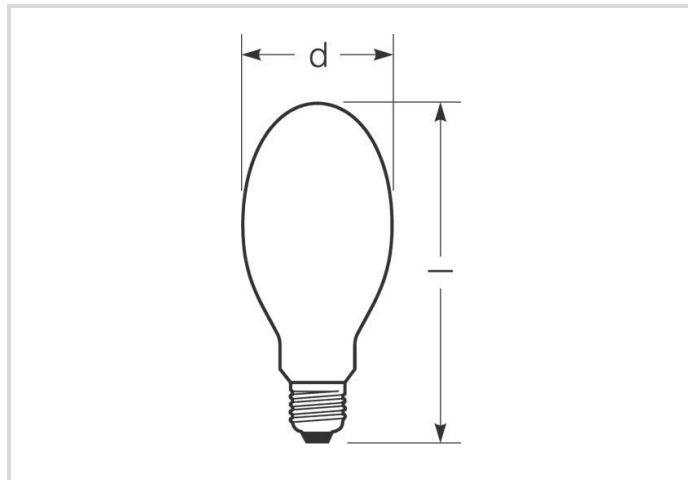

B



40000



4000K



20 000h

## General Data

Artikel Nr.	32219612
Bestellzeichen	HRL 700W/230/E40
EAN-Faltschachtel	4008597196126
Versandeinheit in Stk.	6
EAN Umkarton (Versandeinheit)	4008597496127
Brutto-Gewicht Versandeinheit in kg	3.5
Länge Versandeinheit in m	0.48
Breite Versandeinheit in m	0.33
Höhe Versandeinheit in m	0.41
Product weight	330 g
Produktstatus	● PhaseOut

## Electric Parameters

Wattage	700.0 W
Lamp nominal wattage	700 W
Mains voltage	230 V
Nominal current (A)	5.4 A
Nominal choke current	5.4 A

## Electric Parameters

Compensation capacitor for 50Hz operation	40 $\mu$ F
Running up current max.	140%
Fuse	Delay-action; min. double nominal current
dimmmable	Nein
Controllable (in suitable circuit)	up to 50% (run-up at nominal power)

## Light Application Parameters

Luminous flux	40000 lm
Rated lamp luminous flux	40000 lm
Efficacy	57 lm/W
Total mains efficacy	53 lm/W
Colour temperature	4000 K
Color rendering index	43

## Service Life

Average life	20000 h
Mean service life	15000 h

## Specification

Energylabel (E -> A++)	B
Diameter	141 mm
Length	330 mm
Total length max.	325 mm
Burning position	hs30
Mercury content	92.8 mg
Lamp shape	Ellipsoid
Base	E40

## Notes on Operation

Burning position	hs30
------------------	------

## Miscellaneous

EU-date of phase-out	13.04.2015
EU Directive	TIM

# High pressure mercury lamp

HRL 700W/230/E40

# Radium

## Notes

High pressure mercury vapour lamp with elliptical bulb, coated, base E40. Operation with ballast, no ignitor required.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

## Socketübersicht



E40  
IEC/EN 60061-1  
sheet 7004-24-6

## Spektrale Strahlungsverteilung

Natural daylight is a mixture of direct sunlight and the light of the sky. Therefore, its spectral composition changes permanently due to the changing time of day. The standardised light classification D65 corresponds to a daylight with a colour temperature of approximately 6500 K.


Every discharge lamp type has got an individual spectral power distribution according to its chemical filling. From this result important properties light colour or colour rendering.

Should the spectral lines be very close together the lamp presumably has got a very good colour rendering index, so, Ra might be near 100. Does the spectrum rather look like single lines or frayed out the colour rendering of the lamp will probably be not as good.


If number and height of the spectral lines within the blue range (around 400 nm) prevails it might be a lamp with a rather cold light colour like for example daylight. On the other hand, should the red (around 700 nm) or the red and yellow (around 600 nm) range be dominant one can assume that the lamp will be a rather warm light colour like WDL.

After the lamp start a mercury vapour lamp needs about 5 minutes time to reach its full luminous flux.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm) per 10nm.

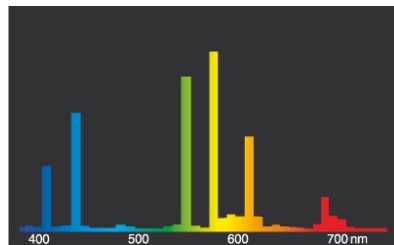


HRL (4200K)

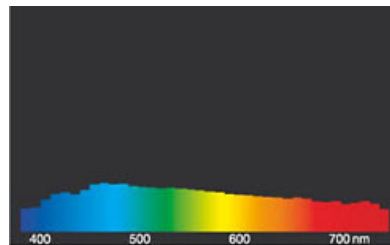

daylight(D 65)

## Schaltbeispiel(e)

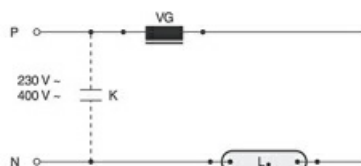

Standard circuit HID with internal ignitor

Key:

L. = lamp

VG = ballast electromagnetic (KVG/VVG)

P = phase

N = zero potential

K = p. f. correction capacitor

The required control gear (here ballast only) for the lamps operation is usually mounted in the suitable luminaire in an appropriate electric circuit. Changes of any kind are to be conducted by qualified and specialised staff, only. Thus, this circuit example is to be understood merely as a technical background information for interested users.

## Besonderheiten



## Allgemeine Hinweise

# High pressure mercury lamp

HRL 700W/230/E40

# Radium

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

**All technical data without guarantee.**