

# High pressure sodium lamp

RNP-E 70W/I/230/E27

# Radium

Product Datasheet Date: 20.05.2026



A



G



5900



2000K



24 000h

## General Data

Artikel Nr.	34407813
Bestellzeichen	RNP-E 70W/I/230/E27
EAN-Faltschachtel	4008597078132
Versandeinheit in Stk.	24
EAN Umkarton (Versandeinheit)	4008597478130
Brutto-Gewicht Versandeinheit in kg	2.338
Länge Versandeinheit in m	0.365
Breite Versandeinheit in m	0.286
Höhe Versandeinheit in m	0.35
Product weight	55 g
Produktstatus	<span style="color: red;">●</span> Inaktiv

## Electric Parameters

Wattage	70.0 W
Lamp nominal wattage	70 W
Weighted energy consumption in 1000 hours	81 kWh
Lamp voltage	90 V
Mains voltage	230 V

## Electric Parameters

Lamp's nominal current	1 A
Nominal choke current	1 A
Compensation capacitor for 50Hz operation	12 $\mu$ F
Running up current max.	125%
Fuse	Delay-action; min. double nominal current
dimnable	Nein

## Light Application Parameters

Luminous flux	5900 lm
Rated lamp luminous flux	5900 lm
Efficacy	84.29 lm/W
Total mains efficacy	84 lm/W
Colour temperature	2000 K
Color rendering index	25
Lumen maintenance at 2000h	0.92
Lumen maintenance at 4000h	0.86
Lumen maintenance at 6000h	0.83
Lumen maintenance at 8000h	0.82
Lumen maintenance at 12000h	0.81
Lumen maintenance at 16000h	0.81
Lumen maintenance at 20000h	0.80

## Service Life

Average life	24000 h
B5 - Service life 5% failures	12000 h
B10 - Service life 10% failures	14000 h
Lamp survival factor at 2000h	0.98
Lamp survival factor at 4000h	0.97
Lamp survival factor at 6000h	0.97
Lamp survival factor at 8000h	0.96
Lamp survival factor at 12000h	0.95
Lamp survival factor at 16000h	0.85
Lamp survival factor at 20000h	0.70

## Specification

Energylabel notice	old label, no EPREL registration, no EU data sheet
Energylabel (G -> A)	G
Energylabel (E -> A++)	A
Diameter	71 mm
Length	156 mm
Total length max.	156 mm
Burning position	hs30
Mercury content	19.0 mg
Lamp shape	Ellipsoid
Model	Opal
Base	E27

## Notes on Operation

Burning position	hs30
------------------	------

## Information especially for EPREL

Energylabel notice	old label, no EPREL registration, no EU data sheet
EPREL ID number	869002

## Miscellaneous

EU Directive	TIM
--------------	-----

## Notes

Standard high pressure sodium lamp, elliptical bulb coated, base E27, Operation with ballast, no ignitor required.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

### Sockelübersicht



E27  
IEC/EN 60061-1  
sheet 7004-21-9

### Spektrale Strahlungsverteilung

Natural daylight is a mixture of direct sunlight and the light of the sky. Therefore, its spectral composition changes permanently due to the changing time of day. The standardised light classification D65 corresponds to a daylight with a colour temperature of approximately 6500 K.

Every discharge lamp type has got an individual spectral power distribution according to its chemical filling. From this result important properties light

# High pressure sodium lamp

RNP-E 70W/1/230/E27

# Radium


colour or colour rendering. Sodium vapour lamps are very economic, due to the yellow light RNP lamps have got a high luminous efficiency but only modest colour rendering.

After the lamp start a high pressure sodium lamp needs about 6-10 minutes time to reach its full luminous flux.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.




RNP Standard/Super

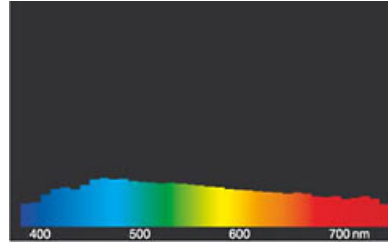

daylight(D 65)

## Schaltbeispiel(e)

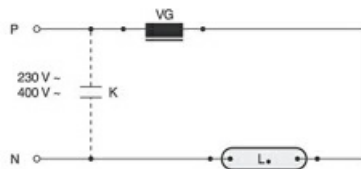

Standard circuit HID with internal ignitor

Key:

L. = lamp

VG = ballast electromagnetic (KVG/VVG)

P = phase

N = zero potential

K = p. f. correction capacitor

The required control gear (here ballast only) for the lamps operation is usually mounted in the suitable luminaire in an appropriate electric circuit. Changes of any kind are to be conducted by qualified and specialised staff, only. Thus, this circuit example is to be understood merely as a technical background information for interested users.

## Besonderheiten



## Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.