
Aluminium U-Profile

Slim Track-U 15,2/6/T13I



Product Datasheet Date: 05.11.2025



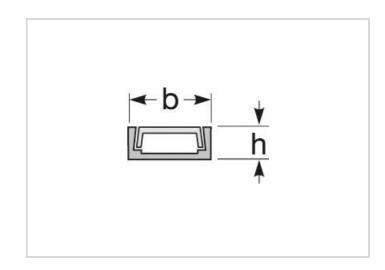

General Data

Artikel Nr.	TRSA1844
Bestellzeichen	PROFILE S U FLAT 15,2/6/B3C3 P 3M
EAN-Faltschachtel	4052899448865
Versandeinheit in Stk.	40
EAN Umkarton (Versandeinheit)	4052899448872
Brutto-Gewicht Versandeinheit in kg	10.88
Länge Versandeinheit in m	3.02
Breite Versandeinheit in m	0.1
Höhe Versandeinheit in m	0.1
Product weight	245 g
Produktstatus	Aktiv

Specification

Type of accessory/spare part	Profile
Length max.	3000 mm
Length	3 m
Height	6 mm
Width	15.2 mm
Internal width	11.2 mm
Material	Aluminium
no. of LED stripes in profile	1
Product shape	U

Aluminium U-Profile

Slim Track-U 15,2/6/T13I



Notes on Operation

Fitting Endcap	ZTPA2611, ZTPA2718, ZTPA4406, ZTPA3190, ZTPA3194
Fitting Cover	ZTPA2573, ZTPA2583
Fitting mounting clips or suspension	ZTPA2620, ZTPA2621, ZTPA2751

Miscellaneous

Similar products	TRPA2513	

Notes

For cooling and protecting the LED flex modules, width for 1 module, suitable for different mounting types (clamps, springs, etc.), length adjustable.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

© = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.