

LED low voltage retrofit

RL-MR16 50 7,2W/12/827/WFL/GU5.3

Radium

Product Datasheet Date: 20.05.2026



A+



F



7,2



621



2700K



15 000h



4 YEARS GUARANTEE

General Data

Artikel Nr.	43618600
Bestellzeichen	RL-MR16 50 827/WFL
EAN-Faltschachtel	4008597186004
Versandeinheit in Stk.	10
EAN Umkarton (Versandeinheit)	4008597486005
Brutto-Gewicht Versandeinheit in kg	0.761
Länge Versandeinheit in m	0.26
Breite Versandeinheit in m	0.11
Höhe Versandeinheit in m	0.07
Product weight	65 g
Produktstatus	● Inaktiv

Electric Parameters

Wattage	7.2 W
Nominal power	7.2 W
Weighted energy consumption in 1000 hours	8 kWh
Lamp power	7.2-7.2 W
Power factor	> 0.50

LED low voltage retrofit

RL-MR16 50 7,2W/12/827/WFL/GU5.3

Radium

Electric Parameters

Nominal voltage	11,5-12 V
Voltage type	AC
Nominal current	880-880 mA
Nominal current (mA)	880 mA
max. no. of lamps at 10A-B10 automatic fuse	20
max. no. of lamps at 16A-B16 automatic fuse	33
dimnable	Nein

Light Application Parameters

Luminous flux	621 lm
Rated lamp luminous flux	621 lm
Luminous flux in 90°-sector	621 lm lm
Luminous flux in 120°-sector	621 lm lm
Luminous intensity	1430 cd
Beam angle	36 °
Efficacy	86 lm/W
Total mains efficacy	86 lm/W
Color temperature	2700 K
Color rendering index	≥ 80
Color rendering index nominal	80-89
Color Stability	≤ 6 sdcn

Service Life

Average life	15000 h
Tc Temperature max.	102 °C
Mean service life	15000 h
No. switching cycles	[100000]
Lamp survival factor at 6000h	≥ 0.90
Early failure rate at 1000h	≤ 5.0 %
Guarantee	4 years

Specification

Energylabel notice	old label, no EPREL registration, no EU data sheet
Energylabel (G -> A)	F
Energylabel (E -> A++)	A+
Diameter	51 mm

LED low voltage retrofit

RL-MR16 50 7,2W/12/827/WFL/GU5.3

Radium

Specification

Length max.	53 mm mm
Length	53 mm
Burning position	any
Mercury content	0.0 mg
Material	Glass
Photobiological safety according to EN 62471	RG0
Lamp shape	Reflector
Base	GU5.3
Colour	White

Notes on Operation

Degree of protection (IP)	IP20
Burning position	any
Mode of operation	LV transformer
Ambient temperatures	-20...+40 °C
Tc Temperature max.	102 °C
With movement sensor	Nein

Information especially for EPREL

Energylabel notice	old label, no EPREL registration, no EU data sheet
Lighting technology	LED
Directional or non-directional light	DLS
Color tunable light source	Nein
Type of color temperature	SINGLE_VALUE
Color stability MacAdams EPREL	6
Displacement factor EPREL	0.70
Life factor EPREL	0.9
Lumen maintenance EPREL	0.93
Flicker	1.0
Stroboscopic effect	0.4
EPREL ID number	875513

Miscellaneous

Similar products	43920126, 43720054, 43819757
------------------	------------------------------

LED low voltage retrofit

RL-MR16 50 7,2W/12/827/WFL/GU5.3

Radium

Notes

MR16-LED, exchange with 12V halogen lamps, warm white light, glass bulb, non-dim, base GU5.3. LED light does not contain UV or IR radiation.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Socketübersicht



GU5.3
IEC/EN 60061-1
sheet 7004-109-2


Spektrale Strahlungsverteilung

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.


White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

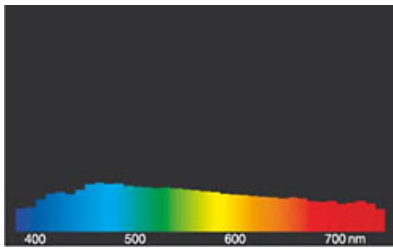

daylight(D 65)

Besonderheiten



Séparer les éléments avant de trier



À DÉPOSER EN MALISSIA À DÉPOSER EN MALISSIA À DÉPOSER EN MALISSIA
Points de collecte sur www.quefairemedechets.fr



Allgemeine Hinweise

For LED replacement of halogen and incandescent lamps, we recommend direct replacement (1: 1) at the respective burning position. For new systems, the number of lamps in the circuit operated at control gear such as transformers or dimmers can be obtained from corresponding compatibility lists (if available). If there is no specification for the type of device or lamp required, for safety reasons, the replacement power shall be assumed as taht of the original halogen type (eg "RL-MR16 35" -> 35W, independent of the real power consumption).

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

Sicherheitshinweise

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

LED low voltage retrofit

RL-MR16 50 7,2W/12/827/WFL/GU5.3

Radium

All technical data without guarantee.