
# Halogen lamp double based
RJH-TS 48W/230/C/XE/R7S

Radium

Product Datasheet Date: 11.11.2026



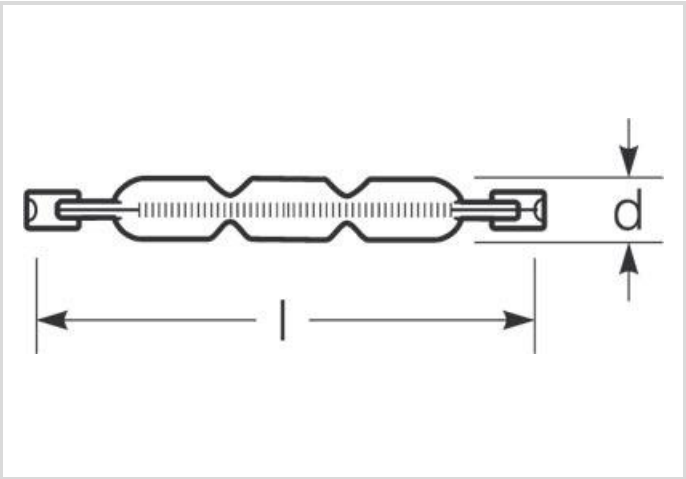


G | 700 | 2800K | Dimmbar

## General Data

| | |
|---|---|
| Artikel Nr. | 22315970 |
| Bestellzeichen | RJH-TS 48W/230/C/XE/R7S |
| EAN-Faltschachtel | 4008597159701 |
| Versandeinheit in Stk. | 20 |
| EAN Umkarton (Versandeinheit) | 4008597459702 |
| Brutto-Gewicht Versandeinheit in kg | 0.191 |
| Länge Versandeinheit in m | 0.114 |
| Breite Versandeinheit in m | 0.094 |
| Höhe Versandeinheit in m | 0.073 |
| Product weight | 5 g |
| Produktstatus | Aktiv |

## Electric Parameters

| | |
|---|---|
| Wattage | 48.0 W |
| Lamp nominal wattage | 48 W |
| Weighted energy consumption in 1000 hours | 48 kWh |
| Lamp voltage | 220-240 V |
| Mains voltage | 230 V |

# Halogen lamp double based
RJH-TS 48W/230/C/XE/R7S

Radium

## Electric Parameters

| | |
|---|---|
| Lamp's nominal current | 0.21 A |
| Nominal current (mA) | 207 mA |
| dimmable | Ja |

## Light Application Parameters

| | |
|---|---|
| Luminous flux | 700 lm |
| Rated lamp luminous flux | 700 lm |
| Efficacy / Luminous efficiency | 15 lm/W |
| Colour temperature | 2800 K |
| Color coordinate X | 0.449 |
| Color coordinate Y | 0.408 |
| Color rendering index | 100 |

## Service Life

| | |
|---|---|
| No. switching cycles | 10000 |

## Specification

| | |
|---|---|
| Energylabel notice | current label, with EPREL registration |
| Energylabel (G -> A) | G |
| Diameter | 12 mm |
| Length | 81 mm |
| Total length max. | 80.3 mm |
| Length | 80.3 mm |
| Contact distance l | 74.9 mm |
| Burning position | any |
| Mercury content | 0.0 mg |
| Lamp shape | Tube, double-ended |
| Model | Clear |
| Base | R7s |

## Notes on Operation

| | |
|---|---|
| Burning position | any |

## Information especially for EPREL

| | |
|---|---|
| Energylabel notice | current label, with EPREL registration |
| Lighting technology | HL |
| Directional or non-directional light | NDLS |

# Halogen lamp double based

RJH-TS 48W/230/C/XE/R7S

Radium

| | |
|---|---|
| Type of color temperature | SINGLE_VALUE |

# Halogen lamp double based
RJH-TS 48W/230/C/XE/R7S

Radium

## Information especially for EPREL

| | |
|---|---|
| EPREL ID number | 566077 |

## Miscellaneous

| | |
|---|---|
| Similar products | 22315971 |

## Notes

Mains voltage halogen lamp clear, tubular shape, 230V mains, double ended, base R7s, dimmable steplessly

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).


**Sockelübersicht**




R7s
IEC/EN 60061-1
sheet 7004-92A-4

**Spektrale Strahlungsverteilung**

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.
Incandescent lamps have got a continouus red-dominated spectrum as the light is generated by heating up a tungsten filament. The addition of halogens to the filling gas enhance the efficiency and prevents blackening. Further increase in effiency can be achieved by adding Xenon and/or IRC-coating.
Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

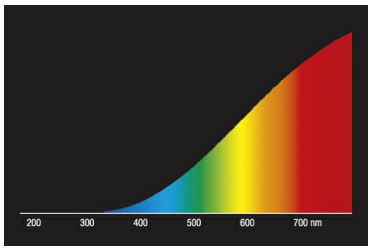



light of incandescent lamps

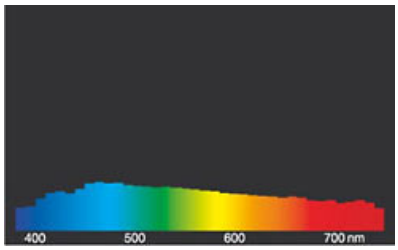


daylight(D 65)

**Besonderheiten**







**Allgemeine Hinweise**

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit,

we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.
® = Registered trademark
Subject to change without notice. Errors and omissions excepted.

**All technical data without guarantee.**