
LED Star T5-RetroFit AC
RL-T5 54 HO 840/G5 AC

Radium

Product Datasheet Date: 10.11.2026



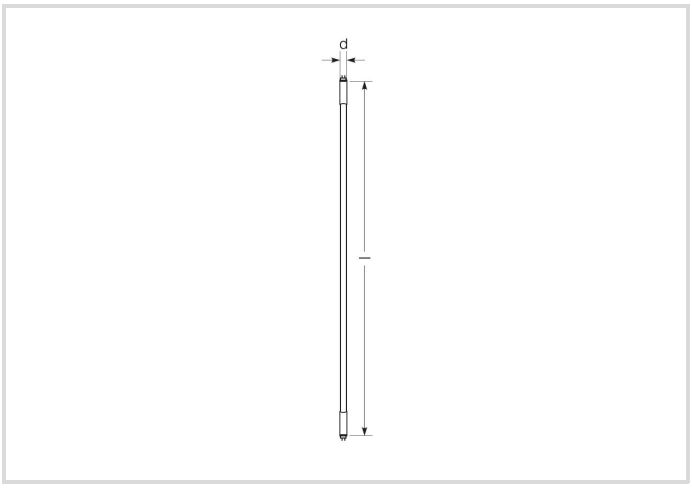

W	lm		h	5 YEARS GUARANTEE
26	4000	4000K	50 000h	

General Data

Artikel Nr.	43920278
Bestellzeichen	RL-T5 54 HO 840/G5 AC
EAN-Faltschachtel	4008597202780
Versandeinheit in Stk.	10
EAN Umkarton (Versandeinheit)	4008597602788
Brutto-Gewicht Versandeinheit in kg	2.198
Länge Versandeinheit in m	1.218
Breite Versandeinheit in m	0.153
Höhe Versandeinheit in m	0.08
Product weight	160 g
Produktstatus	Inaktiv

Electric Parameters

Wattage	26.0 W
Nominal power	26.0 W
Weighted energy consumption in 1000 hours	26 kWh
Lamp power	26.0-26.0 W
Power factor	> 0.9

LED Star T5-RetroFit AC

RL-T5 54 HO 840/G5 AC

Radium

Electric Parameters

Power factor	0,9
Nominal voltage	220-240 V
Mains Voltage	220 - 240 V
Voltage type	AC
Nominal current	115-115 mA
Nominal current (mA)	115 mA
Inrush current	12,6 A
max. no. of lamps at 10A-B10 automatic fuse	39
max. no. of lamps at 16A-B16 automatic fuse	63
dimmable	Nein

Light Application Parameters

Luminous flux	4000 lm
Rated lamp luminous flux	4000 lm
Lumen-Output mark	HO
Beam angle	160 °
Efficacy / Luminous efficiency	154 lm/W
Total mains efficacy	154 lm/W
Color temperature	4000 K
Color coordinate X	0,381
Color coordinate Y	0,379
Color rendering index	≥ 80
Color rendering index nominal	83
Color Stability	≤ 5 sdcm

Service Life

Average life	50000 h
Tc Temperature max.	75 °C
Mean service life	50000 h
Lifetime L70B50	50000 h
Life L70 @ Tc max. with CCG or 230V AC	20000 h
No. switching cycles	50000
Lamp survival factor at 6000h	≥ 0.90
Early failure rate at 1000h	≤ 5.0 %
Guarantee	5 years

LED Star T5-RetroFit AC

RL-T5 54 HO 840/G5 AC

Radium

Specification

Energylabel notice	current label, with EPREL registration
Energy efficiency class according to EU regulation 2019/2015	D
Diameter	19 mm
Tube diameter	16 mm
Length	1149 mm
Length	1149 mm
Burning position	any
Mercury content	0.0 mg
Shatterproof	Ja
Photobiological safety according to EN 62471	RG0
Lamp shape	Tube, double-ended
Base	G5
Colour	White

Notes on Operation

IP Class (Room/Ceiling)	IP 20
Burning position	any
Mode of operation	230 V
Ambient temperatures	-20 … +45 °C
Tc Temperature max.	75 °C
With movement sensor	Nein

Information especially for EPREL

Energylabel notice	current label, with EPREL registration
Lighting technology	LED
Directional or non-directional light	NDLS
Color tunable light source	Nein
Type of color temperature	SINGLE_VALUE
Color stability MacAdams EPREL	5
Displacement factor EPREL	0,9
Life factor EPREL	0,9
Lumen maintenance EPREL	0,7
Flicker	1.0
Stroboscopic effect	0.4
EPREL ID number	569530

LED Star T5-RetroFit AC
RL-T5 54 HO 840/G5 AC

Radium

Miscellaneous

Similar products	43920262, 43720832

Notes

T5 tubular LED lamp for exchange with fluorescent lamps, neutral white light, glass bulb, non-dim, base G5. Operation with 230V only.


Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Sockelübersicht




G5
IEC/EN 60061-1
sheet 7004-52-5

Spektrale Strahlungsverteilung
As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.
The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.
White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin.
Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

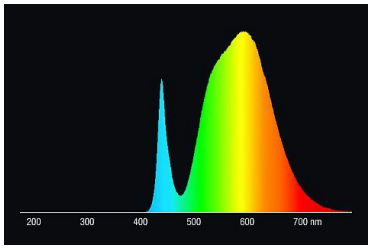


LED retrofit tube lamps for fluorescent lamps 4000K

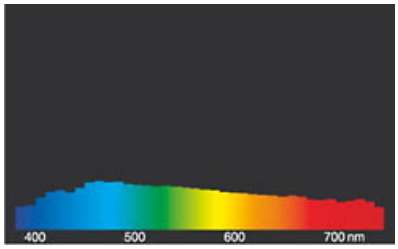

daylight(D 65)

Besonderheiten









Allgemeine Hinweise
Please note the installation instructions when replacing fluorescent lamps with LED tubes. Some LED lamp types are only suitable for 1: 1 replacement at the reespective burning position: with CCG by using the enclosed starter, with ECG with compatible control gear. Others can be operated directly on 230V (conversion of the luminaire), others again can 'do' CCG as well as 230V or all 3 variations. Neo tubes need an external LED driver (replacement of the control gear). LED Neo tubes are dimmable, all other LED tubes are not dimmable.

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.
® = Registered trademark
Subject to change without notice. Errors and omissions excepted.

LED Star T5-RetroFit AC
RL-T5 54 HO 840/G5 AC

Radium

Sicherheitshinweise
To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.