


# Driver for DC-LED lamps and modules

DRIVER 15W/350mA IP20

# Radium

Product Datasheet Date: 20.05.2026

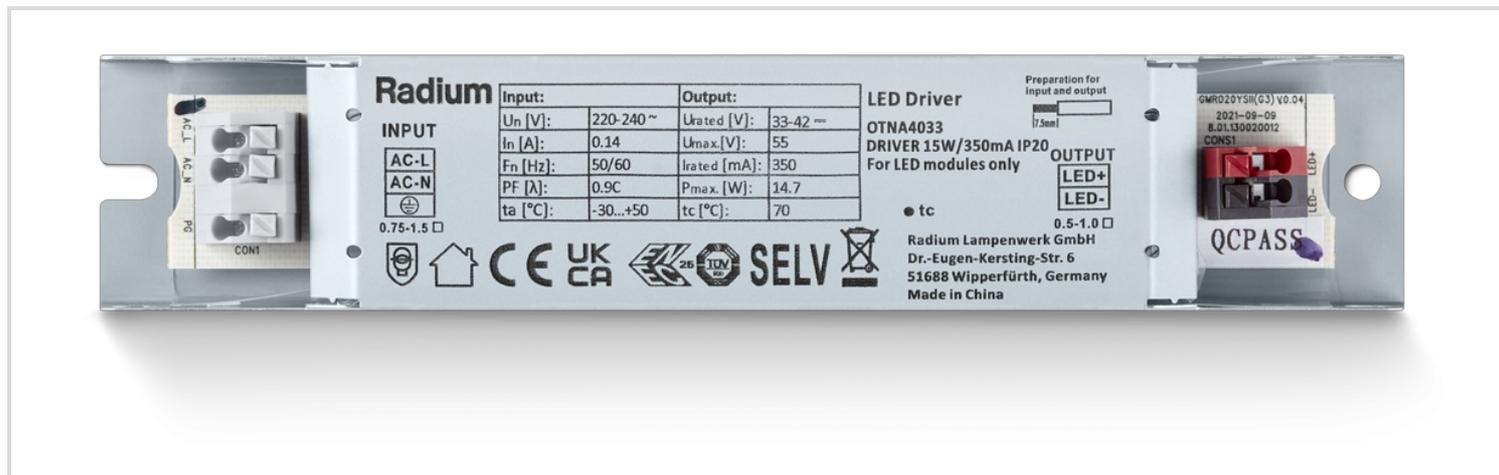

## General Data

Artikel Nr.	OTNA4033
Bestellzeichen	DRIVER DC 15W/350mA IP20
EAN-Faltschachtel	4003556010857
Versandeinheit in Stk.	72
EAN Umkarton (Versandeinheit)	4003556410855
Brutto-Gewicht Versandeinheit in kg	6.6
Länge Versandeinheit in m	0.385
Breite Versandeinheit in m	0.285
Höhe Versandeinheit in m	0.21
Product weight	90 g
Produktstatus	<span style="color: green;">●</span> Aktiv

## Electric Parameters

Rated value output power max.	14.7 W
min. output power	11.5 W
Output power	11.5-14.7 W
Power factor	≥0,94
Input voltage AC (range)	220-240 V

# Driver for DC-LED lamps and modules

DRIVER 15W/350mA IP20

**Radium**

## Electric Parameters

Input voltage DC (range)	200-280 V
Output voltage	33-42 V
Surge voltage resistance (L - N)	1 kV
Output current	350-350 mA
Mains frequency	0 / 50 / 60 Hz
Suitable for DC-voltage (primary side)	Ja
Content of harmonics (THD)	20 %
max. no. of lamps at 10A-B10 automatic fuse	22
max. no. of lamps at 16A-B16 automatic fuse	35
dimnable	Nein
Dimming with push-button	Nein

## Service Life

Service life	70000 h
Lifetime @Tc max.	50000 h
Tc Temperature max.	73 °C
Lifetime @Tc mean	70000 h
Tc mean	67 °C
Lifetime @Tc low	100000 h
Tc low	62 °C
No. switching cycles	>50.000
Guarantee	5 years

## Specification

Mean efficiency	87 %
Length	156 mm
Height max.	20 mm
Width	30 mm
Material	metal
Model	Static

## Notes on Operation

Degree of protection (IP)	IP20
Mode of operation	Constant current
Type of connection	spring clamp
Range of storage temperature	-40...+80 °C

# Driver for DC-LED lamps and modules

DRIVER 15W/350mA IP20

# Radium

## Notes on Operation

Ambient temperatures	-30...+50 °C
Tc Temperature max.	73 °C
max. relative air humidity	90 %
Max. no. of Neo18	2

## Miscellaneous

Similar products	OTNA4034, OTNA4035
------------------	--------------------

## Notes

External constant current driver for installation in luminaire (e.g. for DC LED tubes), not dimmable, indoor use.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

## Besonderheiten



## Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.