


# Ship navigation lamp, B shape

SN-T 65W/2250C/230/P28S

# Radium

Product Datasheet Date: 20.05.2026

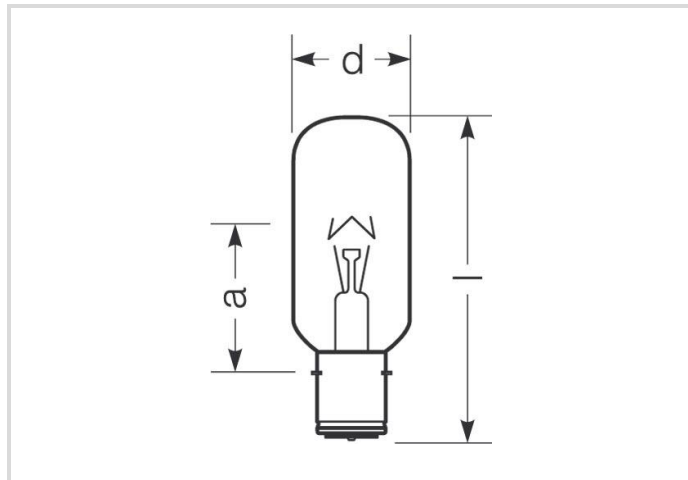

580

## General Data

Artikel Nr.	26122922
Bestellzeichen	SN-T 65W/2250C/230/P28S
EAN-Faltschachtel	4008597229220
Versandeinheit in Stk.	100
EAN Umkarton (Versandeinheit)	4008597429224
Brutto-Gewicht Versandeinheit in kg	4.856
Länge Versandeinheit in m	0.4
Breite Versandeinheit in m	0.205
Höhe Versandeinheit in m	0.24
Product weight	36 g
Produktstatus	<span style="color: green;">●</span> Aktiv

## Electric Parameters

Wattage	65.0 W
Lamp nominal wattage	65 W
Power factor	1.00
Nominal voltage	230 V
Lamp voltage	230-230 V

# Ship navigation lamp, B shape

SN-T 65W/2250C/230/P28S

# Radium

## Electric Parameters

Lamp's nominal current	0.295 A
Nominal current (mA)	295 mA

## Light Application Parameters

Rated lamp luminous flux	580 lm
Luminous intensity	50 cd
Efficacy	8.92 lm/W
Color rendering index	100

## Specification

Diameter	39 mm
Length	108 mm
Burning position	s30
Mercury content	0.0 mg
Model	Clear
Base	P28s

## Notes on Operation

Burning position	s30
------------------	-----

## Miscellaneous

EU Directive	special lamp
--------------	--------------

## Notes


Special lamps are not suitable for general lighting. Matched to and fine-tuned with ship position lights. Nominal life 1000h.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

### Socketübersicht



P28s  
IEC/EN 60061-1  
sheet 7004-42-7

# Ship navigation lamp, B shape

SN-T 65W/2250C/230/P28S


**Radium**

## Spektrale Strahlungsverteilung

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

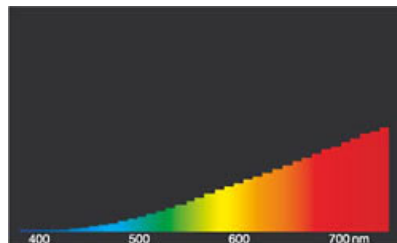

light of incandescent lamps



daylight(D 65)

## Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.