
LED driver DALIDIMMER DALI 4CH 240W/12-48V IP20



Product Datasheet Date: 05.11.2025





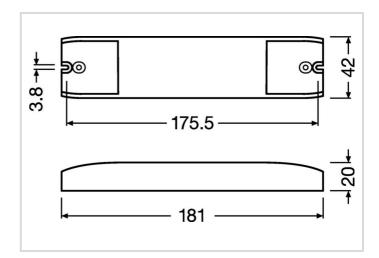

General Data

Artikel Nr.	OTDA4106
Bestellzeichen	DIMMER DALI 4CH 240W/12-48V IP20
EAN-Faltschachtel	4062172166010
Versandeinheit in Stk.	20
EAN Umkarton (Versandeinheit)	4062172166027
Brutto-Gewicht Versandeinheit in kg	2.088
Länge Versandeinheit in m	0.229
Breite Versandeinheit in m	0.197
Höhe Versandeinheit in m	0.133
Product weight	86 g
Produktstatus	Inaktiv

Electric Parameters

Output power	0-240.0 W	
Input voltage DC (range)	12-48 V	
Output voltage	12-48 V	
Number of Channels	4	
Suitable for DC-voltage (primary side)	Ja	

LED driver DALI

DIMMER DALI 4CH 240W/12-48V IP20



Electric Parameters

Dimming with push-button	Nein
Dimming interface	DALI
DALI Device Type	DALI2 DT6/DT8

Light Application Parameters

Dimming range	0 - 100 %

Service Life

Service life	50000 h
Tc Temperature max.	0° °C
Guarantee	5 years

Specification

Length	181 mm	
Height max.	20 mm	
Width	42 mm	
Model	Static	

Notes on Operation

Degree of protection (IP)	IP20
Type of connection	screw clamp
Ambient temperatures	-20+50 °C
Tc Temperature max.	60 °C
max. relative air humidity	85 %

Miscellaneous

Similar products	OTDA4101. OTDA4076	

Notes

4 channel constant voltage supply 12-48V for up to 240W LED load, dimmable via DALI interface, for indoor applications

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Besonderheiten

LED driver DALIDIMMER DALI 4CH 240W/12-48V IP20





Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.