


# Surface-mount aluminium profile for 1 LED-strip, Flat U-profile SMALL, white

length 2m

# Radium

Product Datasheet Date: 20.05.2026

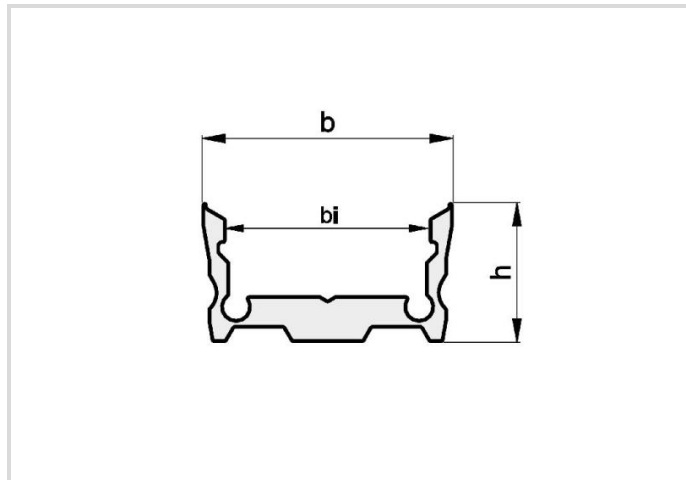

## General Data

Artikel Nr.	TRPA4212
Bestellzeichen	PROFILE S U FLAT 17.3/9.6/B1C1 2M WHITE
EAN-Faltschachtel	4003556011304
Versandereinheit in Stk.	10
EAN Umkarton (Versandereinheit)	4003556411302
Brutto-Gewicht Versandereinheit in kg	3.11
Länge Versandereinheit in m	2.11
Breite Versandereinheit in m	0.07
Höhe Versandereinheit in m	0.053
Product weight	281 g
Produktstatus	<span style="color: green;">●</span> Aktiv

## Specification

Type of accessory/spare part	Profile
Length max.	2010 mm
Length	2 m
Height	9,6 mm
Width	17,3 mm
Internal width	13.5 mm
Material	Aluminium
no. of LED stripes in profile	1
Product shape	U profile flat

# Surface-mount aluminium profile for 1 LED-strip, Flat U-profile SMALL, white

# Radium

length 2m

## Notes on Operation

Mounting type	Surface mounted
Fitting Endcap	ZTPA2611, ZTPA2718, ZTPA4406, ZTPA3190, ZTPA3194
Fitting Cover	ZTPA2572, ZTPA2582, ZTPA3112
Fitting mounting clips or suspension	ZTPA2620, ZTPA2621, ZTPA2751

## Miscellaneous

Similar products	TRPA2512, TRPA4213, TRPA4210
------------------	------------------------------

## Notes

High value, white powder-coated aluminum profile for optimal cooling (RAL9016). Offers many mounting options, protects the LED strip.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

### Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.