


Metal halide lamp with quartz burner

HRI-TS 2000W/N/XL/400/K12S

Radium

Product Datasheet Date: 20.05.2026

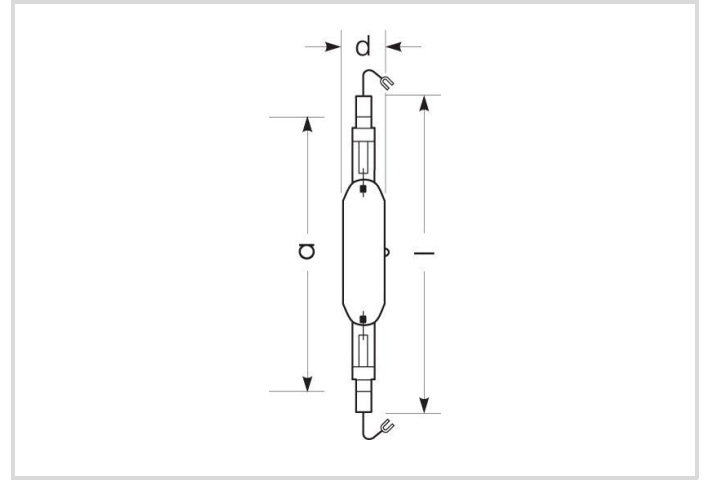

230000



4100K



8 000h

General Data

| | |
|-------------------------------------|--|
| Artikel Nr. | 32416661 |
| Bestellzeichen | HRI-TS 2000W/N/XL/400/K12S |
| EAN-Faltschachtel | 4008597166617 |
| Versandeinheit in Stk. | 16 |
| EAN Umkarton (Versandeinheit) | 4008597466618 |
| Brutto-Gewicht Versandeinheit in kg | 2.952 |
| Länge Versandeinheit in m | 0.525 |
| Breite Versandeinheit in m | 0.27 |
| Höhe Versandeinheit in m | 0.275 |
| Product weight | 85 g |
| Produktstatus | ● Aktiv |

Electric Parameters

| | |
|----------------------|----------|
| Wattage | 2150.0 W |
| Lamp nominal wattage | 2000 W |
| Lamp voltage | 225 V |
| Lamp voltage | 225 V |
| Mains voltage | 400 V |

Electric Parameters

| | |
|---|---|
| Ignition voltage | 4.0 up to 5.0 |
| Lamp's nominal current | 10.4 A |
| Nominal choke current | 10.3 A |
| Compensation capacitor for 50Hz operation | 60 µF |
| Running up current max. | 190% |
| Fuse | Delay-action; min. double nominal current |
| dimnable | Nein |
| Controllable (in suitable circuit) | Nein |

Light Application Parameters

| | |
|-----------------------------|---------------|
| Luminous flux | 230000 lm |
| Rated lamp luminous flux | 230000 lm |
| Efficacy | 107 lm/W |
| Total mains efficacy | 99 lm/W |
| Light colour | Neutral white |
| Colour temperature | 4100 K |
| Color rendering index | 65 |
| Lumen maintenance at 2000h | 0.91 |
| Lumen maintenance at 4000h | 0.90 |
| Lumen maintenance at 6000h | 0.82 |
| Lumen maintenance at 8000h | 0.80 |
| Lumen maintenance at 12000h | 0.80 |
| Lumen maintenance at 20000h | 0.75 |

Service Life

| | |
|-------------------------------|--------|
| Average life | 8000 h |
| Lamp survival factor at 2000h | 0.99 |
| Lamp survival factor at 4000h | 0.97 |
| Lamp survival factor at 6000h | 0.90 |
| Lamp survival factor at 8000h | 0.50 |

Specification

| | |
|--------------------|-------------------------------|
| Energylabel notice | no Label needed (> 82.000 lm) |
| Diameter | 32 mm |
| Length | 297 mm |
| Total length max. | 298 mm |

Metal halide lamp with quartz burner

HRI-TS 2000W/N/XL/400/K12S

Radium

Specification

| | |
|------------------|--------------------|
| Burning position | p15 |
| Mercury content | 260.0 mg |
| Lamp shape | Tube, double-ended |
| Model | Clear |
| Base | K12s-48 |
| Colour | White |

Notes on Operation

| | |
|------------------|-----|
| Burning position | p15 |
|------------------|-----|

Information especially for EPREL

| | |
|---------------------|-------------------------------|
| Energylabel notice | no Label needed (> 82.000 lm) |
| Lighting technology | MH |

Notes

MH long arc lamp clear, light colour NDL, high luminous flux, base K12s-48 (longer). Operation in enclosed luminaire, with ballast and ignitor.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Socketübersicht



K12s-48
IEC/EN 60061-1
Sheet 7004-168-1
Length extended from 36 to 48mm

Spektrale Strahlungsverteilung

Natural daylight is a mixture of direct sunlight and the light of the sky. Therefore, its spectral composition changes permanently due to the changing time of day. The standardised light classification D65 corresponds to a daylight with a colour temperature of approximately 6500 K. Every discharge lamp type has got an individual spectral power distribution according to its chemical filling. From this result important properties light colour or colour rendering.

Should the spectral lines be very close together the lamp presumably has got a very good colour rendering index, so, Ra might be near 100. Does the spectrum rather look like single lines or frayed out the colour rendering of the lamp will probably be not as good.

If number and height of the spectral lines within the blue range (around 400 nm) prevails it might be a lamp with a rather cold light colour like for example daylight. On the other hand, should the red (around 700 nm) or the red and yellow (around 600 nm) range be dominant one can assume that the lamp will be a rather warm light colour like WDL.

After the lamp start a metal halide lamp needs about 2-4 minutes time to reach its full luminous flux, all colours in the spectrum are within the discharge arc then.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm) per 10nm.

