
LED Strip operational gear
DRIVER 30W DC 24V

Product Datasheet Date: 11.11.2026



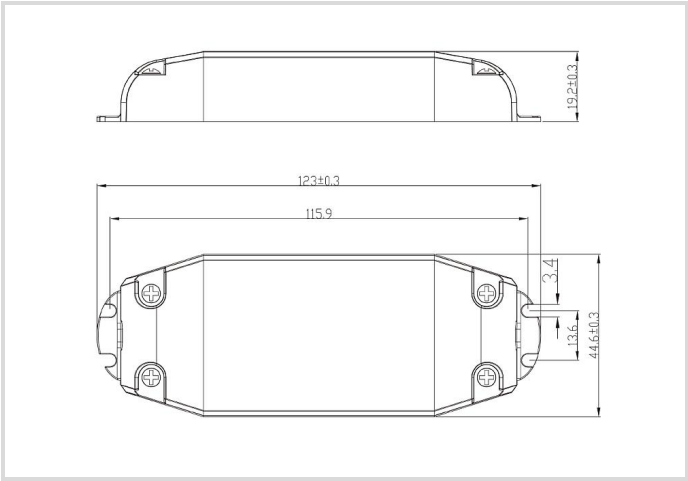

General Data

Artikel Nr.	OTNA4372
Bestellzeichen	DRIVER 30W DC 24V
EAN-Faltschachtel	4003556012189
Versandeinheit in Stk.	16
EAN Umkarton (Versandeinheit)	4003556412187
Brutto-Gewicht Versandeinheit in kg	3.273
Länge Versandeinheit in m	0.261
Breite Versandeinheit in m	0.175
Höhe Versandeinheit in m	0.25
Product weight	162 g
Produktstatus	Aktiv

Electric Parameters

Output power	0-30.0 W
Power factor	0.9
Input voltage AC (range)	180-264 V
Output Voltage	24 V
Output voltage	22.8-25.2 V
Standby consumption	0.2 W
Inrush current	20 A
Input current max.	0.17 A
Output current	0-1250 mA
Mains frequency	50 / 60 Hz

LED Strip operational gear
DRIVER 30W DC 24V

Radium

Electric Parameters

Suitable for DC-voltage (primary side)	Nein
Content of harmonics (THD)	10 %
max. no. of lamps at 10A-B10 automatic fuse	22
max. no. of lamps at 16A-B16 automatic fuse	46
dimmable	Nein
Dimming with push-button	Nein

Service Life

Service life	50000 h
Tc Temperature max.	80 °C

Specification

Mean efficiency	86 %
Length	123 mm
Height max.	20 mm
Width	45 mm
Model	Static

Notes on Operation

Degree of protection (IP)	IP20
Protection class	II
Range of storage temperature	-40...+85 °C
Ambient temperatures	-20…+45 °C
Tc Temperature max.	80 °C
max. relative air humidity	85 %

Information especially for EPREL

Standby consumption	0.2 W

Notes

Compact constant voltage supply 24V for operation of LED modules, not dimmable, for indoor applications

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Besonderheiten

LED Strip operational gear
DRIVER 30W DC 24V

Radium



Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.
® = Registered trademark
Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.