Easy Connect remote control
REMOTE ZGB WHITE 4ZONE

Radium

Product Datasheet Date: 11.11.2026



General Data

Artikel Nr.	LMZA4535
Bestellzeichen	REMOTE ZGB WHITE 4ZONE
EAN-Faltschachtel	4003556014152
Versandeinheit in Stk.	9
EAN Umkarton (Versandeinheit)	4003556414150
Brutto-Gewicht Versandeinheit in kg	0.96
Länge Versandeinheit in m	0.187
Breite Versandeinheit in m	0.16
Höhe Versandeinheit in m	0.095
Product weight	70 g
Produktstatus	Aktiv

Electric Parameters

Number of Channels	1
Dimming interface	Zigbee

Service Life

Tc Temperature max.	75 °C

Specification

Length	150 mm
Height max.	10.5 mm
Height	10.5 mm
Width	39 mm

Easy Connect remote control
REMOTE ZGB WHITE 4ZONE

Specification

Model	Controller unit

Notes on Operation

IP Class (Room/Ceiling)	IP20
Ambient temperatures	-20 ... +45°C
Tc Temperature max.	75 °C
Battery	1 x CR2032
Suitable Accessories	LMZA4378, LMZA4376


Notes

Remote control for dimming white light sources via Zigbee signal, black housing

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Schaltbeispiel(e)

Verdrahtungsbeispiel für einfache weiße LED Strips

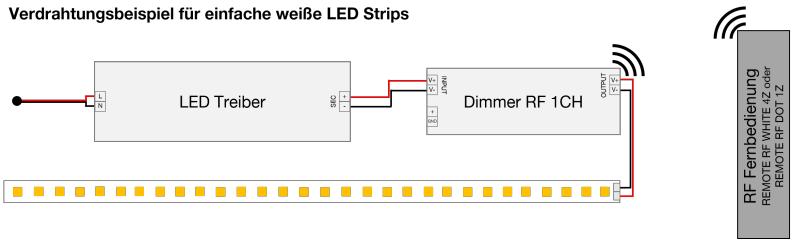

Besonderheiten

Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.
® = Registered trademark
Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.