
Build-in sensor for aluminium profiles

In-Profile TOUCHDIM Sensor 72W/12-24V

Radium

Product Datasheet Date: 11.11.2026

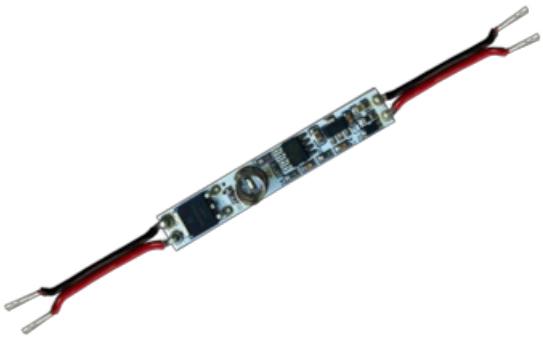

General Data

Artikel Nr.	LMCA5064
Bestellzeichen	IN-PROFILE TOUCHDIM SENSOR 72W/12-24V
EAN-Faltschachtel	4003556014954
Versandeinheit in Stk.	30
EAN Umkarton (Versandeinheit)	4003556414952
Brutto-Gewicht Versandeinheit in kg	0.52
Länge Versandeinheit in m	0.195
Breite Versandeinheit in m	0.105
Höhe Versandeinheit in m	0.135
Product weight	6 g
Produktstatus	Aktiv

Electric Parameters

max. power at 24V	72.0 W
Voltage range	12 - 24 V
Number of cores	2

Specification

Type of accessory/spare part	Movement sensor
Length	50 mm
Height	10 mm
Width	7.8 mm
Built-in width	7.8 mm
Colour	Multi-coloured

Build-in sensor for aluminium profiles

In-Profile TOUCHDIM Sensor 72W/12-24V

Radium

Notes on Operation

Ambient temperatures	-30... +55°C
Fitting aluminium profile	TRPA2501, TRPA2511, TRPA2521, TRPA2531, TRPA2551

Miscellaneous

Similar products	LMCA5065, LMCA5066, LMCA5067

Notes

Compact profile installation sensor for controlling 12-24V LED Strips, enables on/off and dimming by touching the profie, at 24V control of up to 72W.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Besonderheiten



Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.
® = Registered trademark
Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.