
LED driver DALI

DRIVER DALI 4CH 210W/24V IP67 OSRAM

Radium

Product Datasheet Date: 10.11.2026

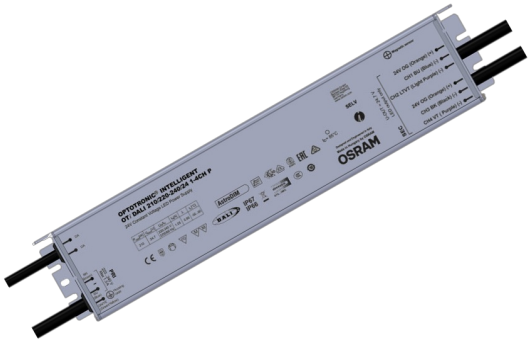

General Data

Artikel Nr.	OTDA5063
Bestellzeichen	DRIVER DALI 4CH 210W/24V IP67 OSRAM
EAN-Faltschachtel	4062172364263
Versandeinheit in Stk.	6
EAN Umkarton (Versandeinheit)	4062172364270
Brutto-Gewicht Versandeinheit in kg	10.005
Länge Versandeinheit in m	0.38
Breite Versandeinheit in m	0.287
Höhe Versandeinheit in m	0.201
Product weight	1468 g
Produktstatus	Inaktiv

Electric Parameters

Rated value output power max.	210.0 W
min. output power	2.1 W
Output power	0-210.0 W
Power factor	0,95
Input voltage AC (range)	198-264 V
Output Voltage	24,7 V
Output voltage	24-24 V
Surge voltage resistance (L - N)	6 kV
Number of Channels	4
Supply frequency	0/50/60 Hz

LED driver DALI

DRIVER DALI 4CH 210W/24V IP67 OSRAM

Radium

Electric Parameters

Suitable for DC-voltage (primary side)	Ja
max. no. of lamps at 10A-B10 automatic fuse	7
max. no. of lamps at 16A-B16 automatic fuse	11
dimmable	Ja
Dimming with push-button	Nein
Dimming interface	DALI
DALI Device Type	DT6

Service Life

Service life	30000 h
Tc Temperature max.	85 °C

Specification

Mean efficiency	93 %
Length	330 mm
Height max.	37 mm
Width	69 mm
Model	Static
Material	Aluminium

Notes on Operation

Degree of protection (IP)	IP67
Protection class	I
Type of connection	Cable
Ambient temperatures	-30…+60 °C
Tc Temperature max.	85 °C

Notes

4 channel constant voltage supply 24V, dimmable via DALI interface, for outdoor applications

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Besonderheiten



LED driver DALI

DRIVER DALI 4CH 210W/24V IP67 OSRAM

Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.
® = Registered trademark
Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.