
High pressure sodium lamp
RNP-T 250W/230/E40 EX

Radium

Product Datasheet Date: 11.11.2026



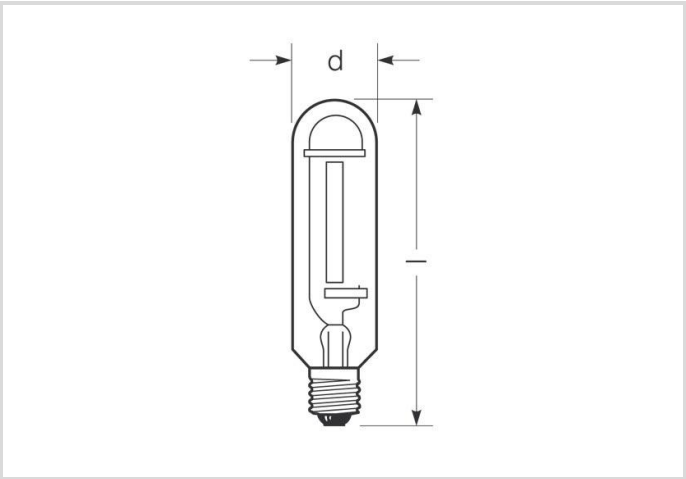

lm 24000

2000K

h 20 000h

General Data

Artikel Nr.	34417060
Bestellzeichen	RNP-T 250W/230/E40 EX
EAN-Faltschachtel	4008597170607
Versandeinheit in Stk.	12
EAN Umkarton (Versandeinheit)	4008597470608
Brutto-Gewicht Versandeinheit in kg	2.815
Länge Versandeinheit in m	0.266
Breite Versandeinheit in m	0.216
Höhe Versandeinheit in m	0.342
Product weight	163 g

Electric Parameters

Wattage	250.0 W
Lamp voltage	100 V
Mains voltage	230 V
Ignition voltage	4.0 up to 5.0
Nominal current (A)	3 A
Nominal choke current	3 A

High pressure sodium lamp
RNP-T 250W/230/E40 EX

Radium

Electric Parameters

Compensation capacitor for 50Hz operation	32 µF

Light Application Parameters

Luminous flux	28000 lm
Rated lamp luminous flux	24000 lm
Efficacy / Luminous efficiency	112 lm/W
Total mains efficacy	112 lm/W
Colour temperature	2000 K
Color rendering index	22
Lumen maintenance at 2000h	0.85
Lumen maintenance at 4000h	0.96
Lumen maintenance at 6000h	0.95
Lumen maintenance at 8000h	0.94
Lumen maintenance at 12000h	0.92
Lumen maintenance at 16000h	0.91
Lumen maintenance at 20000h	0.89

Service Life

Average life	20000 h
B5 - Service life 5% failures	8000 h
B10 - Service life 10% failures	11000 h
Lamp survival factor at 2000h	0.99
Lamp survival factor at 4000h	0.98
Lamp survival factor at 6000h	0.95
Lamp survival factor at 8000h	0.90
Lamp survival factor at 12000h	0.87
Lamp survival factor at 16000h	0.74
Lamp survival factor at 20000h	0.50

Specification

Diameter	47 mm
Length	257 mm
Total length max.	257 mm
Burning position	h180
Mercury content	19.6 mg
Lamp shape	Tube, single-ended

High pressure sodium lamp
RNP-T 250W/230/E40 EX

Specification

Model	Clear
Base	E40

Notes on Operation


Burning position	h180

Notes


Standard high pressure sodium lamp, tubular bulb clear, base E40, for sales outside EU, without CE-marking.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Spektrale Strahlungsverteilung

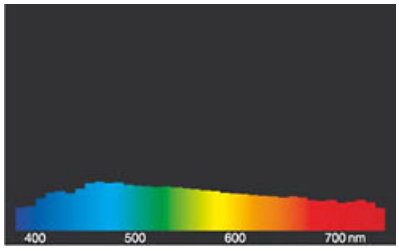

Schaltbeispiel(e)

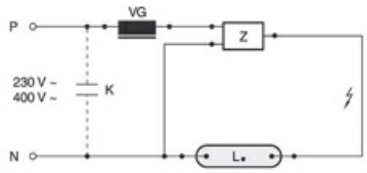

Standard circuit HID with external ignitor
Key:
L. = lamp
VG = electromagnetic ballast (KVG/VVG)
P = phase
N = zero potential
K = p. f. correction capacitor
Z = ignitor

The required control gear (here ignitor and ballast) for the lamps operation is usually mounted in the suitable luminaire in an appropriate electric circuit. Changes of any kind are to be conducted by qualified and specialised staff, only. Thus, this circuit example is to be understood merely as a technical background information for interested users.

Besonderheiten



Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or

even destruction. Therefore, Radium cannot be responsible for consequential damages.
® = Registered trademark
Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.