


LED Grid Luminaire Star, Panel 600

DALI 30W PS CCT UGR IP40

Radium

Product Datasheet Date: 01.04.2026

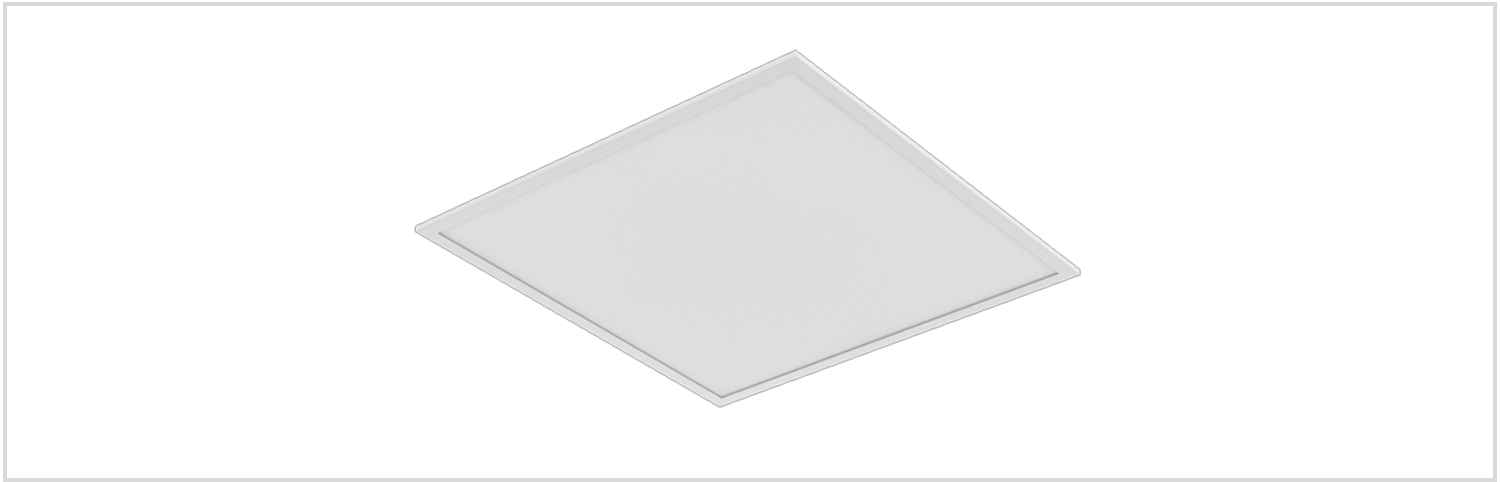

30004000K

General Data

Artikel Nr.	PNLA5083
Bestellzeichen	PL S DALI 600 30W PS CCT UGR IP40
EAN-Faltschachtel	4003556015135
Versandereinheit in Stk.	6
EAN Umkarton (Versandereinheit)	4003556415133
Brutto-Gewicht Versandereinheit in kg	13.635
Länge Versandereinheit in m	0.695
Breite Versandereinheit in m	0.24
Höhe Versandereinheit in m	0.618
Product weight	1770 g
Produktstatus	Aktiv

Electric Parameters

Max. system power	30.0 W
Nominal voltage	220-240 V
Voltage type	AC
Nominal current	152-800 mA
Nominal current (mA)	800 mA

LED Grid Luminaire Star, Panel 600

DALI 30W PS CCT UGR IP40



Electric Parameters

Number of poles	2
Inrush current	7.93 A
Mains frequency	50/60 Hz Hz
Dimming with push-button	Nein

Light Application Parameters

Luminous flux adjustable	Positions
Luminous flux	4500 lm
Rated luminous flux according to IEC 62722-2-1	4500 lm
Luminous flux @3000K	2200-4180 lm
Luminous flux @4000K	2400-4500 lm
Beam angle adjustable	Nein
Beam angle	85 °
Unified Glare Ratio (UGR)	19
Efficacy	140 lm/W
Total mains efficacy	140 lm/W
Colour of light adjustable	Positions
CCT Switch	Ja
Colour of light	White
Color temperature	3000 / 4000 K
Color coordinate X	0.382
Color coordinate Y	0.398
Color rendering index	≥ 80
Color Stability	CC1000076 sdc _m
Light sharing	Symmetric
With light sensor	Nein

Service Life

Lifetime L70B50	70000 h
Life L80B10	70000 h
No. switching cycles	≥ 100.000
Guarantee	5

Specification

Length	595 mm
Height/depth	34 mm

LED Grid Luminaire Star, Panel 600

DALI 30W PS CCT UGR IP40

Radium

Specification

Width	595 mm
Material	CC1000066
Impact strength	IK02
Photobiological safety according to EN 62471	RG0
With light source	Ja
Exchangeable control gear	Ja

Notes on Operation

Degree of protection (IP)	IP40
Connection type	Push-in clamp
Type of wiring	Suitable for through wiring
Max. number of luminaires per B10 circuit breaker	32
Max. number of luminaires per B16 circuit breaker	42
Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24	Nein
Filament test according to IEC 60695-2-11	650 °C - 30 s
Type of control gear	LED operating device voltage-controlled
With light sensor	Nein
With movement sensor	Nein
Suitable for emergency lighting	Nein
Emergency power supply integrated	Nein

Information especially for EPREL

Contains a lightsource of energy efficiency class	C
Mains/Non mains connectable	MLS
Directional or non-directional light	NDLS
Color tunable light source	Ja
Type of color temperature	STEPS
Flickering value Pst LM	1
Stroboscope effect value SVM	0.4

Notes

Flat IP40 DALI LED retrofit panel 600x600 mm, integrated LED driver with power select, low glare (UGR), adjustable light color (steps)

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

LED Grid Luminaire Star, Panel 600

DALI 30W PS CCT UGR IP40

Radium

Besonderheiten



Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.