

LED Grid Luminaire Star, Panel 600
DALI 30W PS CCT UGR IP40

Radium

Product Datasheet Date: 11.11.2026

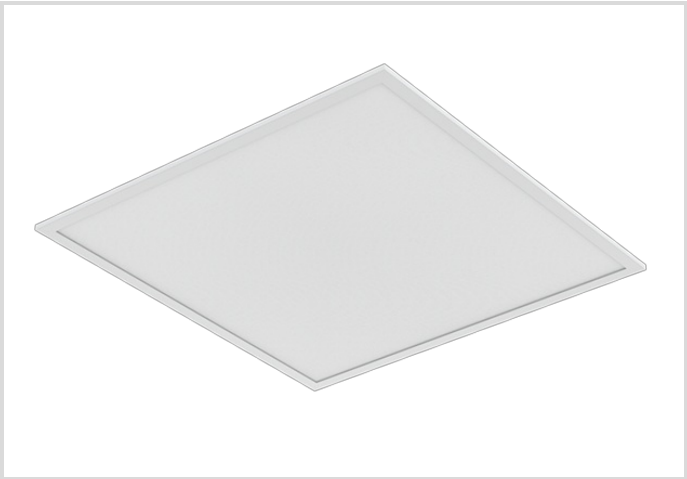

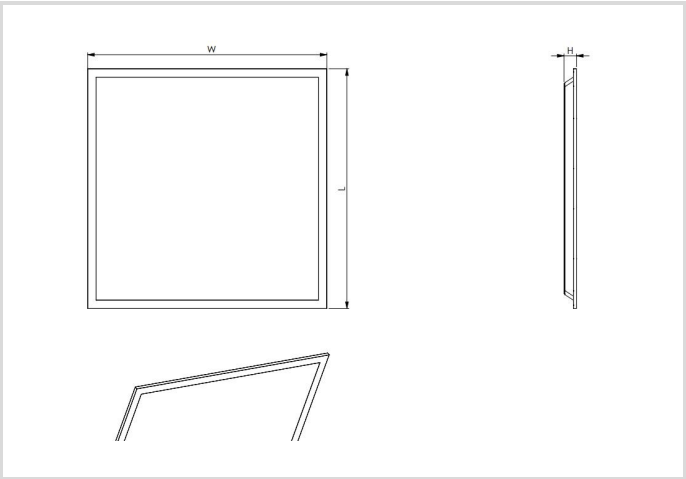

30004000K

General Data

Artikel Nr.	PNLA5083
Bestellzeichen	PL S DALI 600 30W PS CCT UGR IP40
EAN-Faltschachtel	4003556015135
Versandeinheit in Stk.	6
EAN Umkarton (Versandeinheit)	4003556415133
Brutto-Gewicht Versandeinheit in kg	13.635
Länge Versandeinheit in m	0.695
Breite Versandeinheit in m	0.24
Höhe Versandeinheit in m	0.618
Product weight	1730 g
Produktstatus	Aktiv

Electric Parameters

Factory setting wattage	30.0 W
Max. system power	30.0 W
Power factor	0.9
Nominal voltage	220-240 V
Voltage type	AC

LED Grid Luminaire Star, Panel 600
DALI 30W PS CCT UGR IP40

Radium

Electric Parameters

Factory setting lamp curent	800 mA
Nominal current	152-800 mA
Nominal current (mA)	800 mA
Number of poles	2
Inrush current	7.93 A
Mains frequency	0/50/60 Hz
Dimming with push-button	Nein

Light Application Parameters

Luminous flux adjustable	Positions
Factory setting luminous flux	4500 lm
Luminous flux	4500 lm
Rated luminous flux according to IEC 62722-2-1	4500 lm
Luminous flux @3000K	2200-4180 lm
Luminous flux @4000K	2400-4500 lm
Beam angle adjustable	Nein
Beam angle	85 °
Unified Glare Ratio (UGR)	19
Efficacy / Luminous efficiency	150 lm/W
Colour of light adjustable	Positions
Factory setting color temperature	4000 K
CCT Switch	Ja
Colour of light	White
Color temperature	3000 / 4000 K
Color coordinate X	0.382
Color coordinate Y	0.398
Color rendering index	≥ 80
Color Stability	≤ 3 sdcm
Light sharing	Symmetric
With light sensor	Nein

Service Life

Lifetime L70B50	70000 h
Life L80B10	70000 h
No. switching cycles	≥ 100.000
Guarantee	5

LED Grid Luminaire Star, Panel 600
DALI 30W PS CCT UGR IP40

Radium

Specification

Length	595 mm
Height/depth	34 mm
Width	595 mm
Impact strength	IK02
Photobiological safety according to EN 62471	RG0
Material	Aluminium/ PS
Housing material	Aluminium
Material cover	Plastic matt/satinized
Housing colour	White
With light source	Ja

Notes on Operation

Degree of protection (IP)	IP40
Protection class	II
Connection type	Push-in clamp
Type of wiring	Suitable for through wiring
Max. number of luminaires per B10 circuit braker	32
Max. number of luminaires per B16 circuit braker	42
Ambient temperatures	-20 … +40 °C
Filament test according to IEC 60695-2-11	650 °C - 30 s
Type of control gear	LED operating device voltage-controlled
With light sensor	Nein
With movement sensor	Nein
Suitable for emergency lighting	Nein
Emergency power supply integrated	Nein

Information especially for EPREL

Contains a lightsource of energy efficiency class	C
Mains/Non mains connectable	MLS
Directional or non-directional light	NDLS
Color tunable light source	Ja
Type of color temperature	STEPS
Flickering value Pst LM	1
Stroboscope effect value SVM	0.4
EPREL ID number	2655152

LED Grid Luminaire Star, Panel 600
DALI 30W PS CCT UGR IP40

Notes

Flat IP40 DALI LED retrofit panel 600x600 mm, integrated LED driver with power select, low glare (UGR), adjustable light color (steps)

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Besonderheiten



Allgemeine Hinweise
The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.
® = Registered trademark
Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.