
LED Highbay Luminaire Star DALI IP65
200W PS CCT BS

Radium

Product Datasheet Date: 11.11.2026



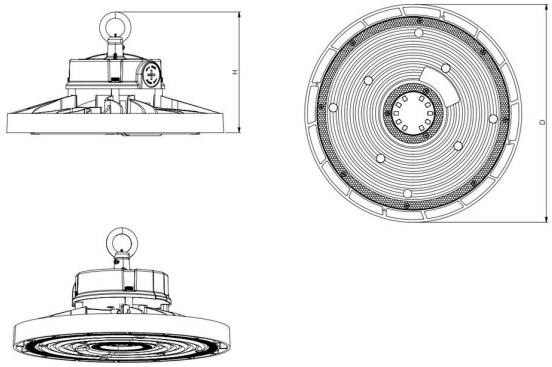

40006500K

General Data

Artikel Nr.	HIBA5116
Bestellzeichen	HB S DALI 200 PS CCT BS IP65
EAN-Faltschachtel	4003556015463
Product weight	2575 g
Produktstatus	Aktiv

Electric Parameters

Factory setting wattage	200.0 W
Max. system power	200.0 W
Power steps	200 / 150 / 120 W
Power factor	0.9
Nominal voltage	220-240 V
Voltage type	AC
Factory setting lamp curent	800 mA
Nominal current	500-800 mA
Inrush current	140 A
Mains frequency	50/60 Hz
dimmable	Ja

LED Highbay Luminaire Star DALI IP65
200W PS CCT BS

Radium

Electric Parameters

Dimming with push-button	Nein
Dimming interface	DALI
Power Select	Ja

Light Application Parameters

Luminous flux adjustable	Positions
Factory setting luminous flux	32000 lm
Rated luminous flux according to IEC 62722-2-1	32000 lm
Luminous flux @4000K	19200-32000 lm
Luminous flux Q 6000/6500K	19200-32000 lm
Beam angle adjustable	Positions
Factory setting beam angle	90 °
Beam angle	60°/90°/110°
Glare rating (UGR)	32
Efficacy / Luminous efficiency	160 lm/W
Colour of light adjustable	Positions
Factory setting color temperature	4000 K
CCT Switch	Ja
Colour of light	White
Color temperature	4000 / 5000 / 6500 K
Color coordinate X	0.382
Color coordinate Y	0.398
Color rendering index	≥ 80
Color Stability	≤ 5 sdcm
Light sharing	Symmetric

Service Life

Lifetime L70B50	80000 h
Life L80B10	80000 h
No. switching cycles	≥100000
Guarantee	5

Specification

Diameter	322 mm
Length	322 mm
Height/depth	157 mm

LED Highbay Luminaire Star DALI IP65
200W PS CCT BS

Radium

Specification

Width	322 mm
Installation height max.	max. 15 m
Impact strength	IK08
Photobiological safety according to EN 62471	RG1
Material	Aluminium / PC
Housing material	Aluminium
Material reflector	Plastic
Housing colour	Black
With light source	Ja

Notes on Operation

Degree of protection (IP)	IP65
Protection class	I
Connection type	Push-in clamp
Type of connection	spring clamp
Type of wiring	Ending
Max. number of luminaires per B10 circuit braker	4
Max. number of luminaires per B16 circuit braker	7
Filament test according to IEC 60695-2-11	650 °C - 30 s
Mounting method	Pendant
Type of control gear	LED operating device current-controlled
Suitable for emergency lighting	Nein
Emergency power supply integrated	Nein

Information especially for EPREL

Contains a lightsource of energy efficiency class	C
Mains/Non mains connectable	MLS
Directional or non-directional light	NDLS
Color tunable light source	Ja
Type of color temperature	STEPS
Flicker	1.0
Stroboscopic effect	0.4
EPREL ID number	2655295

LED Highbay Luminaire Star DALI IP65
200W PS CCT BS

Notes

DALI Highbay luminaire for halls and large areas, integrated LED driver with power select, low glare, adjustable light color and beam angle (steps)

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Besonderheiten



Allgemeine Hinweise
The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.
® = Registered trademark
Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.