


# Low voltage halogen pin base lamp

RJL 60W/12/SKY/IRC/GY6.35

Radium

Product Datasheet Date: 01.02.2026

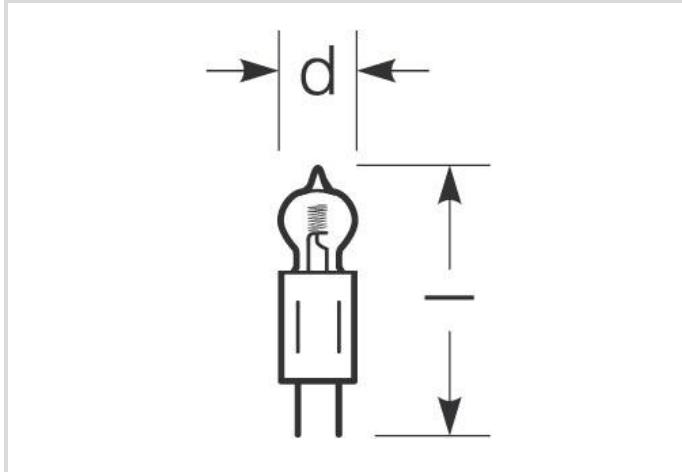

B



G



1650



3000K



4 000h



Dimmable

## General Data

Article No.	22314531
Code	RJL 60W/12/SKY/IRC/GY6.35
Product EAN	4008597145315
Box quantity (pcs.)	40
EAN Box	4008597445316
Gross weight of box in kg	0.222
Length of box in m	0.142
Width of box in m	0.118
Height of box in m	0.103
Product weight	2 g
Product status	<span style="color: orange;">●</span> Phase Out

## Electric Parameters

Wattage	60.0 W
Lamp nominal wattage	60 W
Weighted energy consumption in 1000 hours	60 kWh
Power factor	1.00
Nominal voltage	12 V

# Low voltage halogen pin base lamp

RJL 60W/12/SKY/IRC/GY6.35

Radium

## Electric Parameters

Lamp voltage	12-12 V
Mains voltage	12 V
Nominal current	5000 mA
Lamp's nominal current	5.41 A
Nominal current (mA)	5410 mA
dimmable	Yes

## Light Application Parameters

Luminous flux	1650 lm
Rated lamp luminous flux	1650 lm
Efficacy	28 lm/W
Colour temperature	3000 K
Color rendering index	100

## Service Life

Average life	4000 h
No. switching cycles	100000

## Specification

Energylabel notice	old label, no EPREL registration, no EU data sheet
Energylabel (G -> A)	G
Energylabel (E -> A++)	B
Diameter	12 mm
Length	45 mm
Total length max.	44 mm
Burning position	any
Mercury content	0.0 mg
Model	Clear
Base	GY6.35

## Notes on Operation

Burning position	any
------------------	-----

## Information especially for EPREL

Energylabel notice	old label, no EPREL registration, no EU data sheet
EPREL ID number	863226

# Low voltage halogen pin base lamp

RJL 60W/12/SKY/IRC/GY6.35

Radium

## Miscellaneous

EU-date of phase-out	01.09.2023
EU Directive	SLR = (EU) 2019/2020
Similar products	22320009


## Notes

IRC low voltage halogen pin base lamp, 12V operation with transformer, base GY6.35, stepless dim, 4000 h mean service life

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optional field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

## Base




GY6.35  
IEC/EN 60061-1  
sheet 7004-59-6

## Spectrum


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament. The addition of halogens to the filling gas enhances the efficiency and prevents blackening. Further increase in efficiency can be achieved by adding Xenon and/or IRC-coating.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/km) per 10nm.

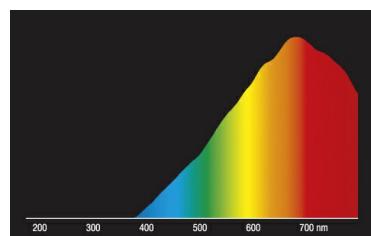


light of incandescent lamps

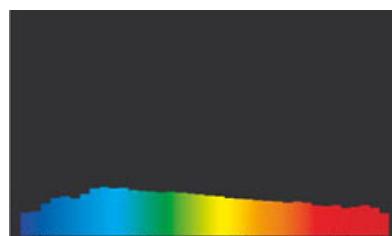

daylight(D 65)

## Special features



## General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

# Low voltage halogen pin base lamp

RJL 60W/12/SKY/IRC/GY6.35

**Radium**

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.