
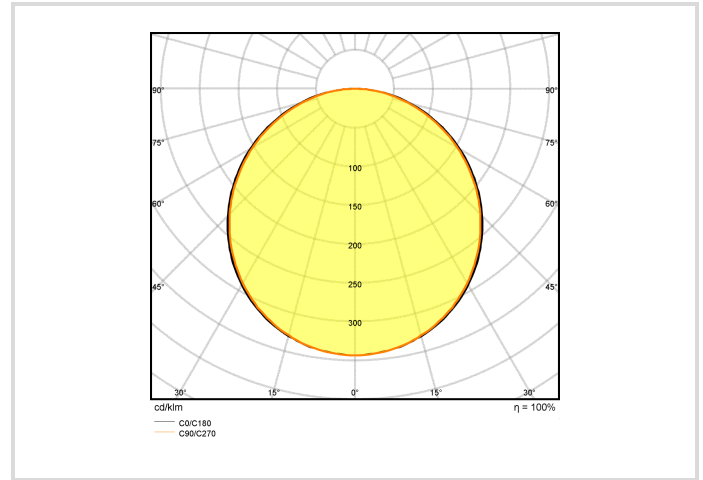


LED-Retrofit for grid luminaire

LED PANEL S 600 40W/4000K 230V

Radium

Product Datasheet Date: 11.09.2025

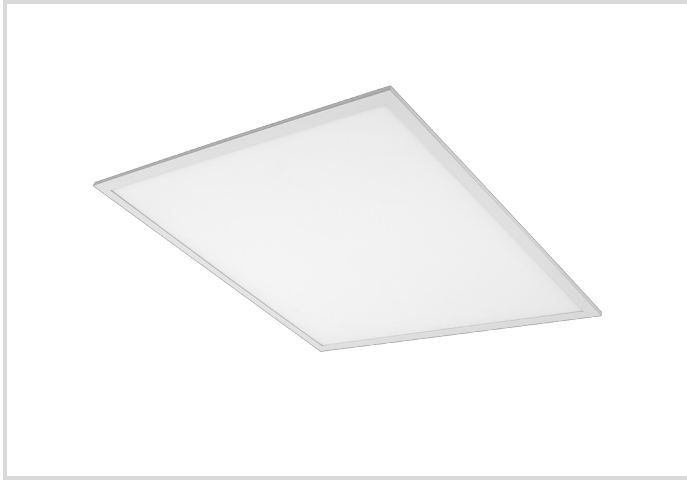

A



4000K

General Data

Article No.	PNLA1784
Code	LED PANEL S 600 40W/4000K 230V
Product EAN	4003556005341
Box quantitiy (pcs.)	5
EAN Box	4003556405349
Gross weight of box in kg	15.164
Length of box in m	0.67
Width of box in m	0.25
Height of box in m	0.7
Product weight	2250 g
Product status	<div><div></div>Inactive</div>

Electric Parameters

Max. system power	40.0 W
Power factor	≥ 0.9
Nominal voltage	220-240 V
Voltage type	AC
Nominal current (mA)	185 mA

Electric Parameters

Inrush current	6,2 A
Mains frequency	50 ... 60 Hz
dimnable	No

Light Application Parameters

Luminous flux	3400 lm
Rated luminous flux according to IEC 62722-2-1	3400 lm
Beam angle	115 °
Efficacy	85 lm/W
Colour of light	White
Code of light color	840
Color temperature	4000 K
Color rendering index	> 80
Color Stability	≤ 5 sdc _m
Light sharing	Symmetric

Service Life

Mean service life	30000 h
Lifetime L70B50	30000 h
No. switching cycles	≥30000

Specification

Energylabel (E -> A++)	A
Length	595 mm
Length	595 mm
Height	8,2 mm
Width	595 mm
Mercury content	0.0 mg
Material	Aluminium
Impact strength	IK02

Notes on Operation

Degree of protection (IP)	IP20
Mode of operation	with external LED driver
Max. number of luminaires per B10 circuit braker	9
Max. number of luminaires per B16 circuit braker	11
Max. number of luminaires per C16 circuit braker	14

Notes on Operation

Permissible storage temperature	-20...+70 °C
Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24	No
Filament test according to IEC 60695-2-10	650 °C - 30s
Mounting type	Inlay for ceiling grid
Type of control gear	LED operating device current-controlled

Notes

Very flat LED retrofit panel for standard grid luminaires, homogenous light emission due to longlife PMMA diffusion disc , non-dim.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Special features



General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.