


# Standard lamp, clear

A 75W/230/C/B22D EX

# Radium

Product Datasheet Date: 05.04.2026

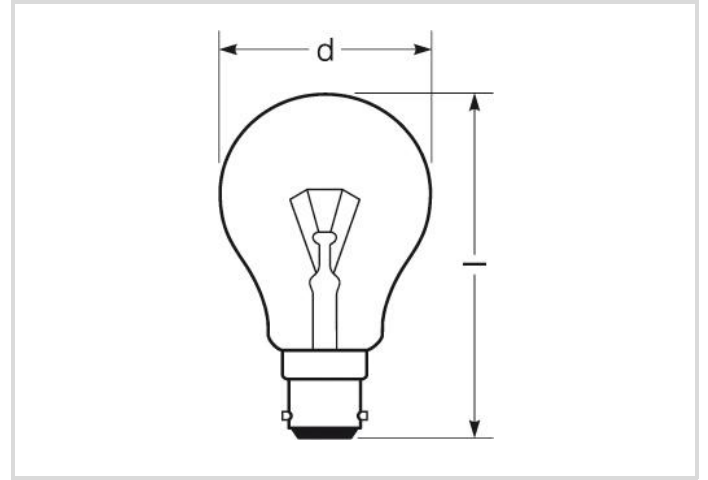

935



1 000h



Dimmable

## General Data

Article No.	11118847
Code	A 75W/230/C/B22D EX
Product EAN	4008597188473
Box quantity (pcs.)	100
EAN Box	4008597488474
Gross weight of box in kg	4.097
Length of box in m	0.57
Width of box in m	0.3
Height of box in m	0.21
Product weight	33 g
Product status	<span style="color: red;">●</span> Inactive

## Electric Parameters

Wattage	75.0 W
Power factor	1.00
Lamp voltage	230-230 V
Mains voltage	230 V
Nominal current (mA)	330 mA

## Electric Parameters

dimmable	Yes
----------	-----

## Light Application Parameters

Luminous flux	940 lm
Rated lamp luminous flux	935 lm
Efficacy	15.67 lm/W
Color rendering index	100

## Service Life

Average life	1000 h
--------------	--------

## Specification

Diameter max.	55 mm
Length	94 mm
Total length max.	94 mm
Burning position	any
Mercury content	0.0 mg
Lamp shape	Other
Model	Clear
Base	B22d
Colour	Other

## Notes on Operation

Burning position	any
------------------	-----

## Miscellaneous

EU Directive	DIM1
--------------	------

## Notes

Standard lamp clear, base B22d, for sales outside EU, without CE-marking

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

## Base

# Standard lamp, clear

A 75W/230/C/B22D EX


# Radium



B22d  
IEC/EN 60061-1  
sheet 7004-10-7

## Spectrum

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K. Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament. Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

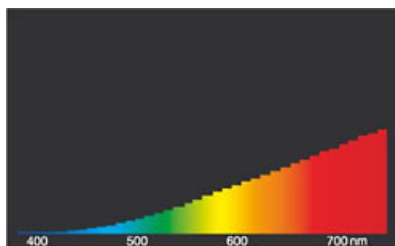


light of incandescent lamps



daylight(D 65)

## Special features



## General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.