

# Pear shape lamp 300°C, clear

P 15W/230/300C/C/E14

# Radium

Product Datasheet Date: 30.05.2026



E



G



85



1 000h



Gradable

## General Data

Code Radium	19118593
Désignation	P 15W/230/300C/C/E14
EAN 10 (unité)	4008597185939
Unité de transport (pièces)	100
EAN 40 (carton)	4008597785931
Poids brut du carton en kg	1.372
Longueur box in m	0.311
Largeur du carton en m	0.159
Hauteur du carton en m	0.148
Product weight	10 g
Product status	<span style="color: red;">●</span> Inactif

## Electric Parameters

Wattage	15.0 W
Weighted energy consumption in 1000 hours	15 kWh
Power factor	1.00
Lamp voltage	230-230 V
Mains voltage	230 V

# Pear shape lamp 300°C, clear

P 15W/230/300C/C/E14

# Radium

## Electric Parameters

Nominal current (mA)	65 mA
dimnable	Oui

## Light Application Parameters

Luminous flux	85 lm
Rated lamp luminous flux	85 lm
Luminous flux in 90°-sector	85 lm
Efficacy / Luminous efficiency	5.67 lm/W
Color rendering index	100

## Service Life

Average life	1000 h
--------------	--------

## Specification

Energylabel notice	old label, no EPREL registration, no EU data sheet
Energylabel (G -> A)	G
Energylabel (E -> A++)	E
Diameter	22 mm
Length	52 mm
Total length max.	52 mm
Burning position	any
Mercury content	0.0 mg
Lamp shape	Pear-shape
Model	Clear
Base	E14
Colour	Other

## Notes on Operation

Burning position	any
------------------	-----

## Information especially for EPREL

Energylabel notice	old label, no EPREL registration, no EU data sheet
EPREL ID number	863159

## Miscellaneous

# Pear shape lamp 300°C, clear

P 15W/230/300C/C/E14

# Radium

---

EU Directive

special lamp

---

Similar products

19119443

---

# Pear shape lamp 300°C, clear

P 15W/230/300C/C/E14

# Radium

## Notes

Pear-shape lamp clear for higher temperatures up to 300°C (oven), base E14

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

## Culot




E14  
IEC/EN 60061-1  
sheet 7004-23-6

## Courbes spectrales


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

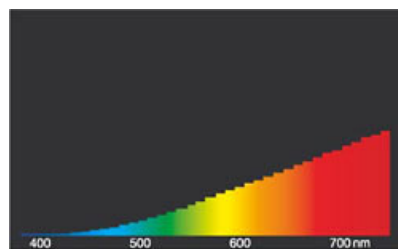


light of incandescent lamps

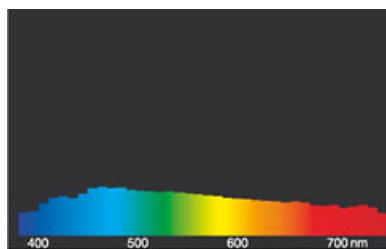

daylight(D 65)

## Particularités



## Notices explicatives générales

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefs) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.