


# LED Star Strip 1000 ZeroPitch

LED STRIP 1000ZP S 940/24V 5M

# Radium

Product Datasheet Date: 02.04.2026

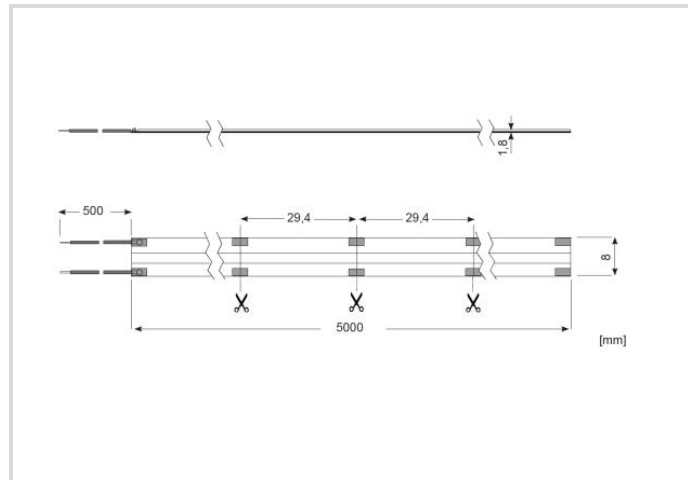

EL G → A F 50 W 10  $\frac{W}{m}$  980  $\frac{lm}{m}$  4000K Max 5 YEARS GUARANTEE

## General Data

|                             |                               |
|-----------------------------|-------------------------------|
| Code Radium                 | RSTA2965                      |
| Désignation                 | LED STRIP 1000ZP S 940/24V 5M |
| EAN 10 (unité)              | 4003556009660                 |
| Unité de transport (pièces) | 9                             |
| EAN 40 (carton)             | 4003556409668                 |
| Poids brut du carton en kg  | 2.53                          |
| Longueur box in m           | 0.215                         |
| Largeur du carton en m      | 0.175                         |
| Hauteur du carton en m      | 0.17                          |
| Product weight              | 120 g                         |
| Product status              | ● Actif                       |

## Electric Parameters

|                   |         |
|-------------------|---------|
| Nominal power     | 50.0 W  |
| Max. system power | 50.0 W  |
| Watt per metre    | 10 W/m  |
| Nominal voltage   | 24 V    |
| Lamp voltage      | 24-24 V |

## Electric Parameters

|                              |     |
|------------------------------|-----|
| Voltage type                 | DC  |
| Number of poles              | 2   |
| dimnable                     | Oui |
| Dimmable with fitting driver | Oui |

## Light Application Parameters

|                            |                       |
|----------------------------|-----------------------|
| Luminous flux adjustable   | Continuously variable |
| Luminous flux              | 4900 lm               |
| Lum. flux / Meter          | 980 lm/m              |
| Luminous flux / Reel       | 4900 lm               |
| Beam angle adjustable      | Non                   |
| Beam angle                 | 120 °                 |
| Efficacy                   | 98 lm/W               |
| Total mains efficacy       | 91 lm/W               |
| Colour of light adjustable | Non                   |
| Colour of light            | White                 |
| Code of light color        | 940                   |
| Color temperature          | 4000 K                |
| Color coordinate X         | 0.381                 |
| Color coordinate Y         | 0.381                 |
| Color rendering index      | >90                   |
| Color Stability            | ≤ 4 sdc <sub>m</sub>  |

## Service Life

|                                  |         |
|----------------------------------|---------|
| T <sub>c</sub> Temperature max.  | 75 °C   |
| Mean service life                | 60000 h |
| Rated life time L70/B50 at 25 °C | 60000 h |
| Guarantee                        | 5 years |

## Specification

|                          |         |
|--------------------------|---------|
| Energylabel (G -> A)     | F       |
| Length                   | 5000 mm |
| Height/depth             | 1,8 mm  |
| Width                    | 8 mm    |
| No. of LEDs per meter    | 544     |
| Distance of LEDs (Pitch) | 0.0 mm  |

## Specification

|                             |          |
|-----------------------------|----------|
| Shortest cutable unit (SEU) | 29.41 mm |
| Lowest bending radius       | 60 mm    |
| Length feed-in cable        | 500 mm   |
| Model                       | Strip    |
| Self-adhesive               | Oui      |
| Exchangeable control gear   | Oui      |

## Notes on Operation

|                           |   |
|---------------------------|---|
| Degree of protection (IP) | IP00                                    |
| max. operable length      | 5 m                                     |
| Connection type           | Push-in clamp                           |
| Type of connection        | Feed-in cable soldered on on one side   |
| Type of wiring            | Suitable for through wiring             |
| Ambient temperatures      | -20...+45°C                             |
| Tc Temperature max.       | 75 °C                                   |
| Mounting method           | Built-in                                |
| Type of control gear      | LED operating device voltage-controlled |
| Suitable Accessories      | FXZA4460                                |

## Information especially for EPREL

|                                      |              |
|--------------------------------------|--------------|
| Lighting technology                  | LED          |
| Mains/Non mains connectable          | NMLS         |
| Directional or non-directional light | NDLS         |
| Color tunable light source           | Non          |
| Type of color temperature            | SINGLE_VALUE |
| Color stability MacAdams EPREL       | 4            |
| EPREL ID number                      | 755204       |

## Miscellaneous

|                  |  |
|------------------|--|
| Similar products | RSTA2955, RSTA3005, RSTA3845, RSTA4265 |
|------------------|--|

## Notes

Flexible linear LED module 1000lm/m, continuous line of light, sticky back for mounting, for operation driver required, length adjustable.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage. The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

# LED Star Strip 1000 ZeroPitch

## LED STRIP 1000ZP S 940/24V 5M


# Radium

### Courbes spectrales

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin. Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

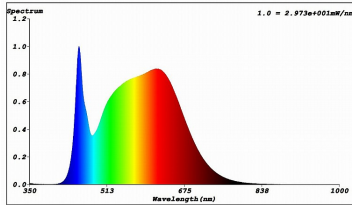

LED-Strip 4000K, Ra min. 90



daylight(D 65)

### Particularités



### Notices explicatives générales

Observe safety instructions during assembly!

Please, consider also:

The LED module itself and all its components must not be stressed mechanically. The assembly must not damage or destroy conductor tracks on the circuit board. To avoid mechanical damage, the LED modules should be securely fastened to the intended ground. Pay attention to the correct polarity! A wrong polarity will not enable any light emission and may damage the LED module. Parallel connection is urgently recommended as a safe electrical operating mode. Series connection is not recommended.

When mounting on metallic or other conductive surfaces, electrical insulation must be provided at the solder joints between the module and the mounting surface. Please make sure that the LED driver has sufficient power to operate the total load. It is the responsibility of the user to provide suitable protection against corrosive substances such as moisture and condensation as well as other harmful elements.

For applications exposed to moisture and dust, the module must be protected by a device or housing with a suitable protection class.

Radium does offer pre-assembly services. With our Strip Configurator, you can cut the strips to your desired length and combine them with matching aluminum profiles or have them glued directly in, as well as choose a suitable operating device for your application. All lengths of LED strips, profiles, covers and cables are subject to standard industry tolerances and can therefore deviate.

Our team will be pleased to advise you, also regarding application and mounting questions.

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

### Consignes de sécurité

The LED module does not provide protection against short circuits, overloads or overheating. In order to operate LED modules safely, it is necessary to operate them with a LED driver that protects against short circuits, overloads and overheating. To simplify the luminaire / installation approval, LED drivers and LED modules must bear the CE mark. The installation of LED modules (with LED driver) must be carried out in compliance with all applicable electrical and safety standards. Only qualified personnel may perform installations.

All technical data without guarantee.