

# Halogen lamp for stage lighting

RJH-TS 1000W/230/C/R7S

# Radium

Product Datasheet Date: 02.04.2026



G



21000



3000K



2 000h



Gradable

## General Data

|                             |                        |
|-----------------------------|------------------------|
| Code Radium                 | 22315975               |
| Désignation                 | RJH-TS 1000W/230/C/R7S |
| EAN 10 (unité)              | 4008597159756          |
| Unité de transport (pièces) | 12                     |
| EAN 40 (carton)             | 4008597459757          |
| Poids brut du carton en kg  | 0.349                  |
| Longueur box in m           | 0.242                  |
| Largeur du carton en m      | 0.113                  |
| Hauteur du carton en m      | 0.083                  |
| Product weight              | 17 g                   |
| Product status              | ● PhaseOut             |

## Electric Parameters

|   |           |
|---|-----------|
| Wattage                                   | 1000.0 W  |
| Weighted energy consumption in 1000 hours | 1010 kWh  |
| Lamp voltage                              | 230-230 V |
| Mains voltage                             | 230 V     |
| Lamp's nominal current                    | 4.35 A    |

## Electric Parameters

|          |     |
|----------|-----|
| dimnable | Oui |
|----------|-----|

## Light Application Parameters

|                          |          |
|--------------------------|----------|
| Luminous flux            | 21000 lm |
| Rated lamp luminous flux | 21000 lm |
| Efficacy                 | 21 lm/W  |
| Colour temperature       | 3000 K   |
| Color coordinate X       | 0.446    |
| Color coordinate Y       | 0.407    |
| Color rendering index    | 100      |

## Service Life

|                      |        |
|----------------------|--------|
| Average life         | 2000 h |
| No. switching cycles | 10000  |

## Specification

|                      |  |
|----------------------|--|
| Energylabel notice   | current label, with EPREL registration |
| Energylabel (G -> A) | G                                      |
| Diameter             | 12 mm                                  |
| Length               | 191.5 mm                               |
| Total length max.    | 191.5 mm                               |
| Contact distance I   | 185.7 mm                               |
| Burning position     | p15                                    |
| Mercury content      | 0.0 mg                                 |
| Lamp shape           | Tube, double-ended                     |
| Model                | Clear                                  |
| Base                 | R7s                                    |

## Notes on Operation

|                  |     |
|------------------|-----|
| Burning position | p15 |
|------------------|-----|

## Information especially for EPREL

|                                      |  |
|--------------------------------------|--|
| Energylabel notice                   | current label, with EPREL registration |
| Lighting technology                  | HL                                     |
| Mains/Non mains connectable          | MLS                                    |
| Directional or non-directional light | NDLS                                   |

# Halogen lamp for stage lighting

RJH-TS 1000W/230/C/R7S

**Radium**

---

Type of color temperature

SINGLE\_VALUE

---

EPREL ID number

703280

---

# Halogen lamp for stage lighting

RJH-TS 1000W/230V/C/R7S

# Radium

## Miscellaneous

Similar products

22315976, 22315974

## Notes

High-voltage halogen lamp for stage lighting, clear tube shape, 230V, double-ended socket, R7s base, continuously dimmable, 2000h lifespan.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

## Culot




R7s  
IEC/EN 60061-1  
sheet 7004-92A-4

## Courbes spectrales

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament. The addition of halogens to the filling gas enhance the efficiency and prevents blackening. Further increase in efficiency can be achieved by adding Xenon and/or IRC-coating.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

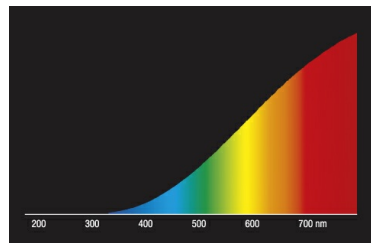


light of incandescent lamps



daylight(D 65)

## Particularités



**MADE  
INGER  
MANY.**

## Notices explicatives générales

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

# Halogen lamp for stage lighting

RJH-TS 1000W/230/C/R7S

# Radium

All technical data without guarantee.