

# DC Tube for external drivers

## LED T8 NEO 36 865/G13

# Radium

Product Datasheet Date: 02.04.2026



LED T8 Neo 36 - 865				
Operating current	Voltage	Power	Luminous efficacy	Luminous flux
1 000 mA	20.2 V	20.2 W	167 lm/W	3 368 lm
950 mA	20.1 V	19.1 W	168 lm/W	3 210 lm
900 mA	20.1 V	18.1 W	169 lm/W	3 053 lm
850 mA	20.0 V	17.0 W	170 lm/W	2 895 lm
800 mA	20.0 V	16.0 W	171 lm/W	2 737 lm
750 mA	19.9 V	14.9 W	173 lm/W	2 580 lm
<b>700 mA</b>	<b>19.9 V</b>	<b>13.9 W</b>	<b>174 lm/W</b>	<b>2 422 lm</b>
650 mA	19.8 V	12.9 W	175 lm/W	2 253 lm
600 mA	19.7 V	11.8 W	176 lm/W	2 083 lm
550 mA	19.7 V	10.8 W	177 lm/W	1 914 lm
500 mA	19.6 V	9.8 W	178 lm/W	1 744 lm



C



13.9



6500K



70 000h



Gradable



5 YEARS GUARANTEE

## General Data

Code Radium	43719851
Désignation	RL-T8 36 NEO 865/G13 DC
EAN 10 (unité)	4008597198519
Unité de transport (pièces)	25
EAN 40 (carton)	4008597498510
Poids brut du carton en kg	6.2
Longueur box in m	1.27
Largeur du carton en m	0.21
Hauteur du carton en m	0.2
Product weight	160 g
Product status	● Actif

## Electric Parameters

Wattage	13,9 W
Nominal power	13.9 W
Weighted energy consumption in 1000 hours	14 kWh
Lamp power	9.8-20.2 W
Nominal voltage	19-21 V

## Electric Parameters

Voltage type	DC
Nominal current	500-1000 mA
Nominal current (mA)	700 mA
dimnable	Oui

## Light Application Parameters

Rated luminous flux according to IEC 62612	2422 lm
Luminous flux	1744-3368 lm
max. luminous flux at	1000 mA
Beam angle	160 °
Efficacy	174 lm/W
Total mains efficacy	161 lm/W
Light colour	daylight
Color temperature	6500 K
Color coordinate X	0.313
Color coordinate Y	0.337
Color rendering index	> 80
Color Stability	≤ 5 sdc <sub>m</sub>

## Service Life

Average life	70000 h
T <sub>c</sub> Temperature max.	70 °C
Mean service life	100000 h
Life L70B10	100000 h
Life L80B10	70000 h
No. switching cycles	>1.000.000
Guarantee	5 years

## Specification

Energylabel notice	current label, with EPREL registration
Energylabel (G -> A)	C
Diameter	28.5 mm
Tube diameter	25.4 mm
Length	1212 mm
Length	1200 mm
Burning position	any

## Specification

Mercury content	0.0 mg
Material	Glass
Shatterproof	Oui
Lamp shape	Tube, double-ended
Base	G13
Colour	White

## Notes on Operation

Degree of protection (IP)	IP20
Burning position	any
Mode of operation	DC
Range of storage temperature	-20 ... +60°C
Ambient temperatures	-20 ... +50°C
Tc Temperature max.	70 °C
With movement sensor	Non

## Information especially for EPREL

Energylabel notice	current label, with EPREL registration
Lighting technology	LED
Mains/Non mains connectable	NMLS
Directional or non-directional light	NDLS
Color tunable light source	Non
Type of color temperature	SINGLE_VALUE
Color stability MacAdams EPREL	5
Displacement factor EPREL	1
EPREL ID number	1083294

## Miscellaneous

Similar products	43719850, 43720051
------------------	--------------------

## Notes

T8 tubular DC LED lamp for external drivers, dimmable with suitable driver, daylight, glass bulb, base G13. Exchange for fluorescent lamps.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

# DC Tube for external drivers

LED T8 NEO 36 865/G13

# Radium

## Culot




G13  
IEC/EN 60061-1  
sheet 7004-51-8

## Courbes spectrales


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin. Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

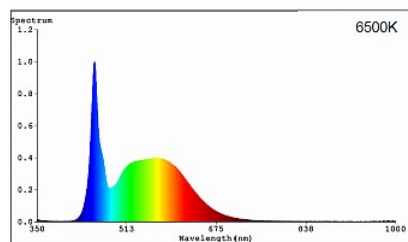


LED-NEO-Tubes 6500K, Replacements for fluorescent lamps

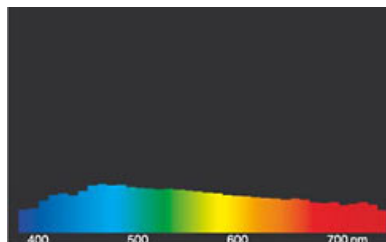

daylight(D 65)

## Particularités



## Notices explicatives générales

Please note the installation instructions when replacing fluorescent lamps with LED tubes. Some LED lamp types are only suitable for 1: 1 replacement at the respective burning position: with CCG by using the enclosed starter, with ECG with compatible control gear. Others can be operated directly on 230V (conversion of the luminaire), others again can 'do' CCG as well as 230V or all 3 variations. Neo tubes need an external LED driver (replacement of the control gear). LED Neo tubes are dimmable, all other LED tubes are not dimmable.

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefs) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

## Consignes de sécurité

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.