


# LED Strip operational gear

## DRIVER 200W DC 24V

# Radium

Product Datasheet Date: 30.05.2026

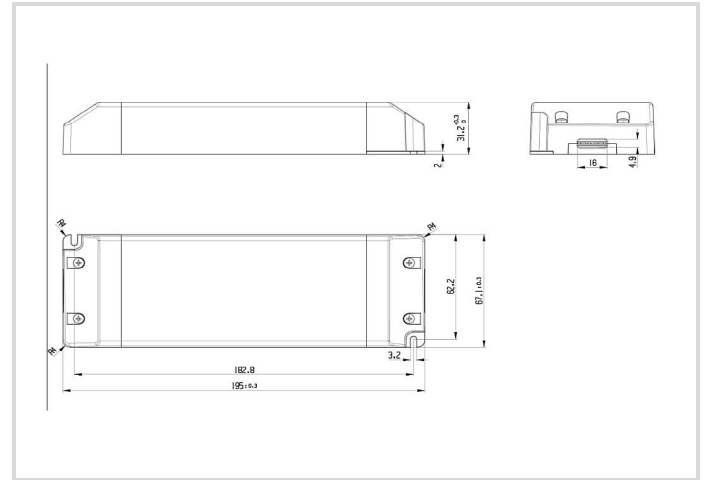

## General Data

Code Radium	OTNA4375
Désignation	DRIVER 200W DC 24V
EAN 10 (unité)	4003556012219
Unité de transport (pièces)	15
EAN 40 (carton)	4003556412217
Poids brut du carton en kg	7.234
Longueur box in m	0.175
Largeur du carton en m	0.23
Hauteur du carton en m	0.205
Product weight	443 g
Product status	<span style="color: green;">●</span> Actif

## Electric Parameters

Output power	0-200.0 W
Power factor	0.9
Input voltage AC (range)	180-264 V
Output Voltage	24 V
Output voltage	22.8-25.2 V

## Electric Parameters

Standby consumption	0.4 W
Inrush current	90 A
Input current max.	1.1 A
Output current	0-8330 mA
Mains frequency	50 / 60 Hz
Suitable for DC-voltage (primary side)	Non
max. no. of lamps at 10A-B10 automatic fuse	2
max. no. of lamps at 16A-B16 automatic fuse	4
dimnable	Non
Dimming with push-button	Non

## Service Life

Service life	30000 h
Tc Temperature max.	90 °C
Guarantee	5 years

## Specification

Length	195 mm
Height max.	32 mm
Width	68 mm
Model	Static

## Notes on Operation

Degree of protection (IP)	IP20
Range of storage temperature	-40...+85 °C
Ambient temperatures	-20...+45 °C
Tc Temperature max.	90 °C
max. relative air humidity	90 %

## Information especially for EPREL

Standby consumption	0.4 W
---------------------	-------

## Notes

Compact constant voltage supply 24V for operation of LED modules, not dimmable, for indoor applications

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains

# LED Strip operational gear

## DRIVER 200W DC 24V

**Radium**

(frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

# LED Strip operational gear

## DRIVER 200W DC 24V

# Radium

### Particularités



### Notices explicatives générales

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.