



## General Data

Code Radium	LMZA4537
Désignation	REMOTE ZGB DOT 1ZONE
EAN 10 (unité)	4003556014176
Unité de transport (pièces)	16
EAN 40 (carton)	4003556414174
Poids brut du carton en kg	0.594
Longueur box in m	0.223
Largeur du carton en m	0.085
Hauteur du carton en m	0.125
Product weight	10 g
Product status	<span style="color: green;">●</span> Actif

## Electric Parameters

Number of Channels	1
Dimming interface	Zigbee

## Service Life

Tc Temperature max.	75 °C
---------------------	-------

## Specification

Diameter	32.2 mm
Height max.	12 mm
Height	12 mm
Model	Controller unit

### Notes on Operation

Degree of protection (IP)	IP20
Ambient temperatures	-20 ... +45°C
Tc Temperature max.	75 °C
Battery	1 x CR2026
Suitable Accessories	LMZA4378, LMZA4376

### Notes

Mini remote control for dimming white light sources via Zigbee signal, black housing


Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

### Exemple(s) de circuit

Verdrahtungsbeispiel für einfache weiße LED Strips

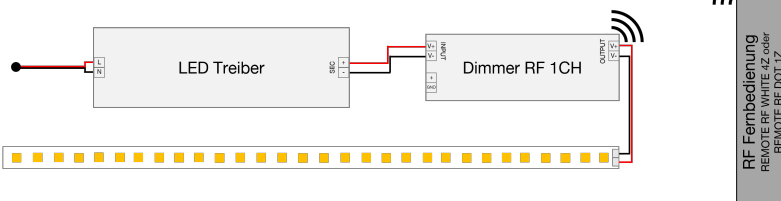

### Particularités



### Notices explicatives générales

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.