

LED EssenceDuo - Retrofit f. Ralux Duo

RL-DUO26 830/G24D/G24Q-3

Radium

Product Datasheet Date: 02.04.2026



F



10



1035



3000K



30 000h



3 YEARS GUARANTEE

General Data

Code Radium	43520624
Désignation	RL-DUO26 830/G24D/G24Q EM
EAN 10 (unité)	4008597206245
Unité de transport (pièces)	10
EAN 40 (carton)	4008597406249
Poids brut du carton en kg	0.895
Longueur box in m	0.218
Largeur du carton en m	0.092
Hauteur du carton en m	0.191
Product weight	70 g
Product status	● Actif

Electric Parameters

Wattage	10.0 W
Nominal power	10.0 W
Weighted energy consumption in 1000 hours	10 kWh
Lamp power	10.0 W
Nominal voltage	220-240 V

Electric Parameters

Voltage type	AC
Nominal current	47 mA
Nominal current (mA)	47 mA
Inrush current	15 A
max. no. of lamps at 10A automatic fuse	125
max. no. of lamps at 16A automatic fuse	200
dimnable	Non

Light Application Parameters

Luminous flux	1035 lm
Rated lamp luminous flux	1035 lm
Luminous flux	1035 lm
Beam angle	280 °
Efficacy	104 lm/W
Total mains efficacy	104 lm/W
Color temperature	3000 K
Color coordinate X	0.434
Color coordinate Y	0.403
Color rendering index	≥ 80
Color Stability	≤ 5 sdcn

Service Life

Average life	30000 h
Mean service life	30000
Lifetime L70B50	30000 h
Min. number of switching cycles	20000
Guarantee	3 years

Specification

Energylabel (G -> A)	F
Diameter	34 mm
Length	164 mm
Length	164 mm
Burning position	any
Material	Glass
Photobiological safety according to EN 62471	RG0

LED EssenceDuo - Retrofit f. Ralux Duo

RL-DUO26 830/G24D/G24Q-3

Radium

Specification

Lamp shape	Tube, single-ended
Base	G24d
Colour	White

Notes on Operation

Degree of protection (IP)	IP20
Burning position	any
Mode of operation	CCG, 230V
Ambient temperatures	-20 ... +45 °C
With movement sensor	Non

Information especially for EPREL

Lighting technology	LED
Mains/Non mains connectable	MLS
Directional or non-directional light	NDLS
Color tunable light source	Non
Type of color temperature	SINGLE_VALUE
Color stability MacAdams EPREL	5
Displacement factor EPREL	0,9
Life factor EPREL	0.9
Lumen maintenance EPREL	0.958
Flicker	1.0
Stroboscopic effect	0.4
EPREL ID number	2214090

Miscellaneous

Similar products	43520625
------------------	----------

Notes

LED compact lamp for replacement with Ralux Duo, warm white light, glass bulb, not dimmable, fits in lamp holder for base G24d and G24q.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Culot

G24d


IEC/EN 60061-1

sheet 7004-78-5

LED EssenceDuo - Retrofit f. Ralux Duo

RL-DUO26 830/G24D/G24Q-3

Radium




Courbes spectrales

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.


The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

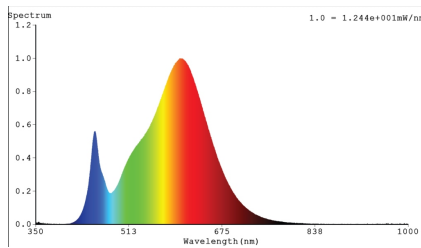


LED retrofit lamps 3000K

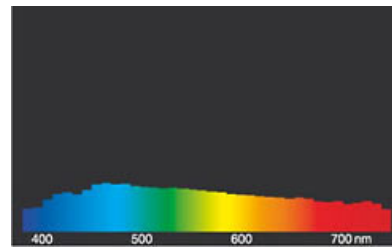

daylight(D 65)

Particularités

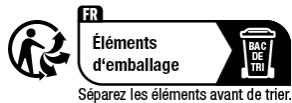

Séparez les éléments avant de trier.



Points de collecte sur www.quefairede mesdechets.fr



Notices explicatives générales

When replacing Ralux Duo with LED-lamps, we recommend a simple and uncomplicated replacement (1: 1) at the respective light point without rewiring. Operation at mains voltage directly would also be possible. RL-DUO lamps are not suitable for tandem operation. 35 ° C ambient temperature for the lamp inside the luminaire must not be exceeded. Outdoor use is only permitted with suitable luminaires (IP protection).

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefs) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

Consignes de sécurité

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.