

# Standard traffic lights lamp, 220-240V

SVA 40W/220-240/C/E27 RO

# Radium

Product Datasheet Date: 03.06.2026



230



2700K



Dimmable

## General Data

Article No.	11411288
Codice	SVA 40W/220-240/C/E27 RO
Product EAN	4050300219288
Box quantity (pcs.)	100
EAN Box	4050300219295
Gross weight of box in kg	4.831
Length of box in m	0.6
Width of box in m	0.3
Height of box in m	0.22
Product weight	31 g
Product status	<span style="color: red;">●</span> Inattivo

## Electric Parameters

Wattage	40.0 W
Lamp nominal wattage	40 W
Power factor	1.00
Lamp voltage	220-240 V
Mains voltage	230 - 240 V

## Electric Parameters

Nominal current (mA)	170 mA
dimnable	Si

## Light Application Parameters

Rated lamp luminous flux	230 lm
Efficacy / Luminous efficiency	5.75 lm/W
Color temperature	2700 K
Color rendering index	100

## Service Life

B2 - Service life 2% failures	3000 h
-------------------------------	--------

## Specification

Diameter	62 mm
Length	110 mm
Burning position	s135
Mercury content	0.0 mg
Model	Clear
Base	E27

## Notes on Operation

Burning position	s135
------------------	------

## Miscellaneous

EU Directive	special lamp
--------------	--------------

## Notes

Mains voltage traffic lighting lamp, base E27. Special lamp not suitable for general lighting. Lamp life B2 critical for application (traffic Lights).

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

### Base

E27

IEC/EN 60061-1

sheet 7004-21-9

# Standard traffic lights lamp, 220-240V

SVA 40W/220-240/C/E27 RO


Radium



## Spectrum

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament. Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

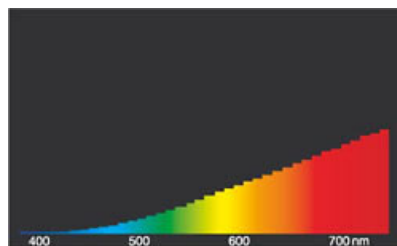

light of incandescent lamps



daylight(D 65)

## General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.