



**Radium**  
Die Lichtmarke

**LED  
Strips**

Flexible, customized,  
future-proof.

**Your light solution for creative  
and sustainable lighting.**

[www.radium.de/led-strips](http://www.radium.de/led-strips)



# Source of Inspiration for Every Project. **Radium Lighting Systems.**

## Flexible linear lighting systems

Linear lighting systems play an increasingly important role in modern lighting. The seamless light lines open up extremely versatile designs due to the variable adaptation to a wide variety of application areas. In addition, LED strips are significantly more efficient than fluorescent lamps and neon tubes and reduce energy and maintenance costs sustainably.

Get to know the Radium LED Strip systems and let the excellent quality of our products convince you!

## Efficient Allrounders

Radium LED Strips will enable you staging your rooms optimally. As effective direct lighting, they elegantly provide uniform, high-quality light. By means of indirect lighting, the LED strips set decorative highlights and create a cozy atmosphere. Radium LED Strips do not only convince indoors, but also in outdoor applications: thanks to their protection class, our robust, waterproof LED strips also demonstrate durability and reliable functionality outdoors. With the accompanying wide range of accessories, the lighting systems can be optimally accommodated to the application and easily installed. Whether LED strip, LED driver, aluminum profile, cover or mounting accessories – obtaining from us means: you get everything from one source.

### Application examples:

- Architectural lighting
- Department stores
- Hotels, restaurants, bars
- Meeting rooms, foyers, entrance halls
- Effective outdoor lighting



# Content

LED Strip Configurator	12
Easy Connect System	14
<b>LED Strips</b>	<b>20</b>
<b>Profiles and Covers</b>	<b>66</b>
<b>Power Supply</b>	<b>96</b>
<b>Light Control</b>	<b>104</b>
Technical Information	110
Pictograms	112

**„Flexible LED Strips  
from Radium are the  
perfect allround solution  
for modern lighting  
requirements.“**



# LED Strips for Future-proof Projects.

## Light in all its Facets.



### Eye-catcher by modern lighting design

Today, modern LED lighting does not just provide brightness, but also takes on a whole lot of other tasks. Pleasantly homogeneous light has an aesthetic effect and fills every room with life. Forming of shadows is deliberately reduced. This creates a particularly uniform lighting atmosphere. And thanks to luminaires becoming slimmer and slimmer light sources stay modestly in the background. Their simple yet stylish look is supported by modern aluminum profiles or whole LED luminaires which disappear completely into coves, between shelves or showcases.



### Form and functionality in harmony

With LED Strips from Radium you can design projects of all kinds individually and flexibly. Thanks to their compact design, you can also find space in slim luminaires or narrow coves. This freedom of design enables you to set up elegant systems that are easy to install and connect. For outdoor installations no special devices are required, but they are also open to creative solutions.



### Wide portfolio for versatile applications

Digital lighting is increasingly becoming a multifunctional design tool. Whether simple white lighting in different light colours or coloured light through RGB and RGBW technology, everything is possible. Tunable white and WarmDIM modules in combination with the appropriate light control create the perfect prerequisite for individual light colours with the best light quality. With a programmed course of daylight, the light can have an optimal effect on the human biorhythm. Solutions like this are used in Human Centric Lighting (HCL) concepts and thus make an important contribution to wellbeing, motivation and the ability to concentrate.

**Properly supplied – granted.**

In the Radium portfolio you will find the right LED drivers for optimal operation of the LED modules and smart lighting control for demanding projects

**Full focus on good lighting.**


You get matching plastic covers with a clear or matt surface for each profile. The professional covers do not only look good, they also ensure a fine light distribution with high efficiency.

**Design, protection and cooling.**

Our aluminum profiles are ideal for use with LED modules and offer a wide range of applications and design options.

**Brilliant light, efficient and versatile.**

The heart of the lighting solution is the LED module. Our broad portfolio does not leave anything to be desired for professional users. And in order to make the installation quick and easy, it would be best to order the fitting accessories in one go.

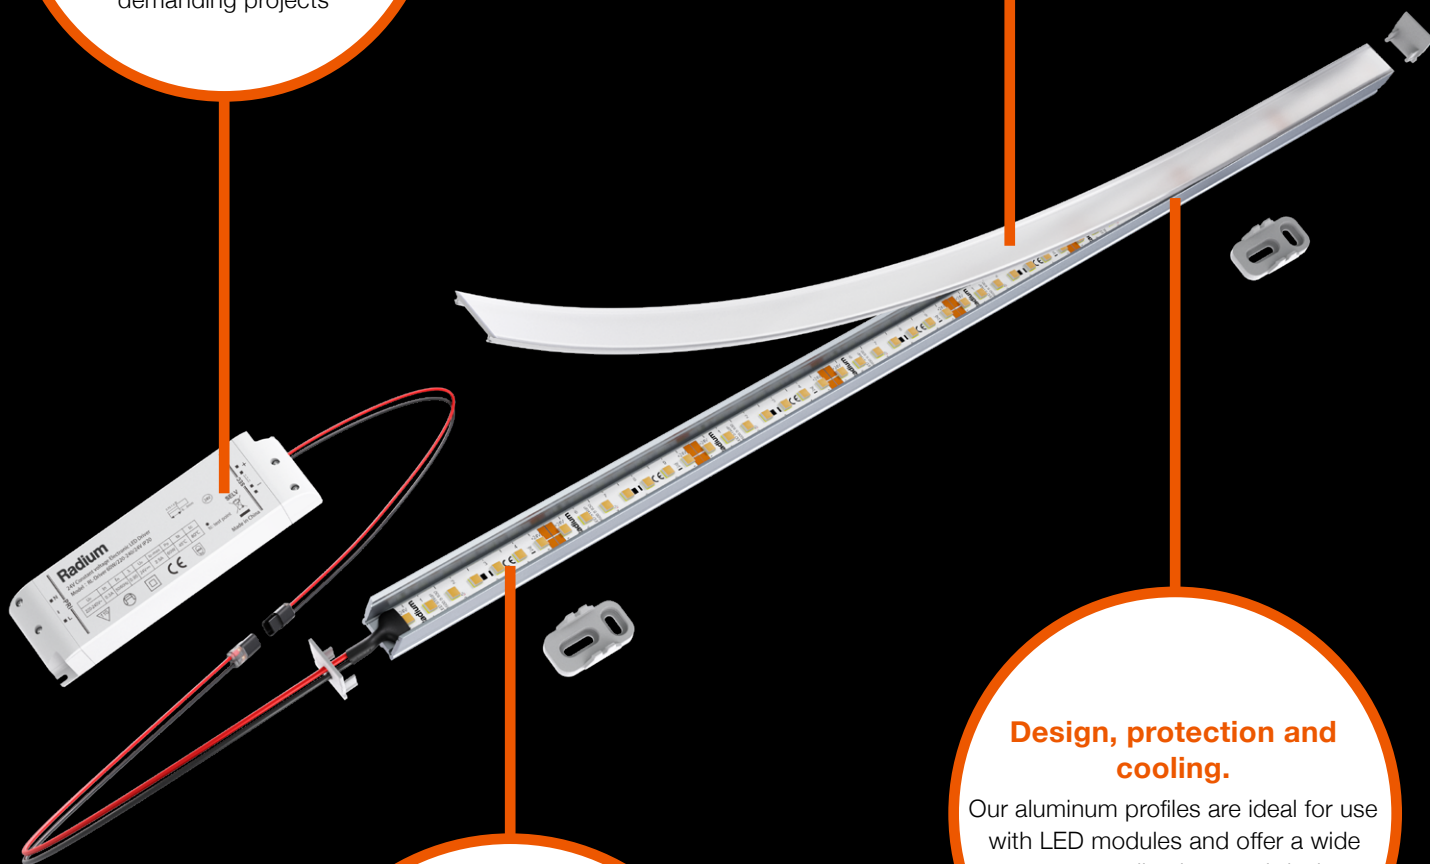





**Ceiling installation** for basic lighting and as stylish decorative lighting

# Design Advanced Rooms. By Targeted Use of LED Strips.



**Ceiling coves** for indirect lighting



**Back-lighting** for decorative accentuation



**Back-lighting** for accentuation or for advertising purposes



**Cabinet / Showcase lighting** for decorative accentuation



**Under-surface lighting** for decorative accentuation





**Wall coves**  
for indirect lighting



**Wire suspension**  
for basic lighting



**Wall-attached mounting**  
for decorative lighting



**Under-surface lighting**  
for decorative accent lighting

**Orientation light** for decorative and  
functional lighting in one go

Plan Ahead, Implement Efficiently.

## LED Strips as Full Reels or Tailor-made System.

Flexible LED Strips from Radium offer an extremely wide range of possible applications. But Radium also offers maximum flexibility in terms of scope of delivery to you: With either 5M Reels, 30M or 50M Big Reels and our customer-specific Individual Cut solutions, you are always well prepared for the wishes and requirements of your customers.

For particularly quick and easy installation, there is also the plug-in Easy Connect system. The components are perfectly matched and can be combined as required. You can find more information on pages 14-15.

### LED Strips for every need

The portfolio of LED Star Strips makes each type available in three shipping options. In addition to our standard reels with 5 meters, you can also get extra long modules with up to 50 meters on a reel. When waterproof modules are needed, best let them be assembled by us, which saves time for you and you will get guaranteed quality directly from the manufacturer.

Use our online configurator for LED Strips to plan your projects at [www.radium.de/en/led-strip-configurator](http://www.radium.de/en/led-strip-configurator).

### Professional make-to-order and environmental protection

Would you like to reduce your assembly expenses? Then we would be happy to take care of the assembly of the components for you. Our employees will cut the LED strip, profile and cover according to your specifications. Every lighting system we assemble is subjected to a 100% final clearance. We calculate the cutting of the LED strip, profile and cover as well as the glueing-in of the strips as a package price. You can see the respective services on [page 11](#).

In the interest of environmental protection, we pack and ship the components with recyclable materials and try to do it without plastic if possible. So, even accessories such as mounting brackets and end caps are packed in paper bags.





**5M  
Reels**



Versatile, extremely energy-efficient and particularly long-lasting: Flexible LED strips are the clever all-round solution for a wide variety of lighting tasks today. So it's always good to have the fitting material in stock. With the high-quality 5M Reels from Radium, you can offer sophisticated customers the most modern LED technology for a wide range of applications. The standard market unit ensures both a lower storage risk and less tied-up capital and it also ensures high availability.

## Your advantages

### **5 meter reel**

- Customary units of measure
- Low storage risk and high availability



Big construction projects make you think big: You also need bigger numbers of LEDs, therefore, larger reels of LED Strips. With the 50 or 30 meters long Big Reels, Radium offers you the latest LED technology for a variety of tasks – from general lighting to accent lighting – so that you don't have to spend a long time searching for the best and most economical lighting solution. And that with little wiring and minimal waste. So you enjoy maximum flexibility on the construction site and are always ready for your next LED lighting project.

## Your advantages

### 50 or 30 meter reel

- Little waste
- Maximum operable length can be used without additional Strip to Strip connectors
- Saves space and packaging material

**50/30M  
Big  
Reels**







## Service

### SERVICE CUT STRIP

- Cutting the LED Strip to size
- Soldering a cable

### SERVICE CUT PROFILE/COVER

- Cutting the profile and cover

### SERVICE CUT STRIP/PROFILE/COVER

- Cutting the LED Strip to size
- Soldering a cable
- Cutting the profile and cover

### SERVICE CUT AND MOUNT

- Cutting the LED Strip to size
- Soldering a cable
- Cutting the profile and cover
- Mounting accessories and gluing in the LED Strip

**Note:** The cable length is 0.5m as standard. Other lengths are available upon request.

Sometimes you just need tailor-made solutions that are a perfect fit for specific requirements. We manufacture flexible LED strips according to your individual length specifications. This enables you to plan important lighting projects particularly economically and precisely and then implement them extremely quickly on the construction site. Your personal contact at Radium will be happy to help you with your next lighting task.

## Your advantages

### Make-to-order with Radium

- Low installation effort
- Individual cuts
- Professional and ESD-protected processing
- 100% final inspection including functional test of the assembly



# Plan Projects Online.


## The LED Strip Configurator.

Use our online configurator when planning your lighting project with LED Strips! With this convenient tool, you can reach your target quickly and easily.

You enter the dimensions, the planned type of installation as well as light colour and brightness and we show you the corresponding products and compatible accessories.

Get a material list and ask us about the assembly. Let yourself be convinced by the LED Strip Configurator at [www.radium.de/en/led-strip-configurator](http://www.radium.de/en/led-strip-configurator).



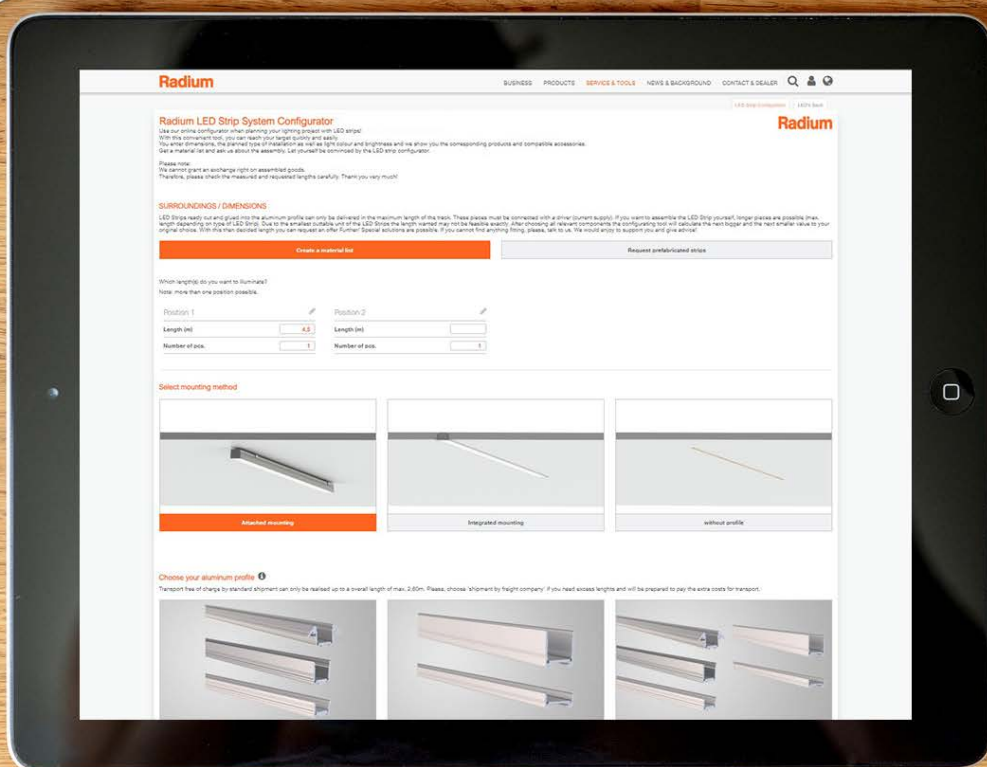

**„Efficient, flexible  
planning for your  
lighting project.  
It's so easy with the  
Radium LED Strip  
Configurator. “**



High-quality lighting  
with a clever plug-in system.

## Easy Connect LED Strips.

- ✓ **Everything you need** to operate your LED Strips.
- + **Add that little bit extra** to expand your LED Strip system in a practical and functional way.

### Step 1

Select an **LED Strip**. If you decide to use several strips, add their power together.

Example:  $15W + 30W + 15W = 60W$


### Step 2

Select the appropriate **driver** based on the total power of the LED Strip chosen.

Example (see step 1):

$30W$   $60W$   $120W$

✗ ✓ ✗

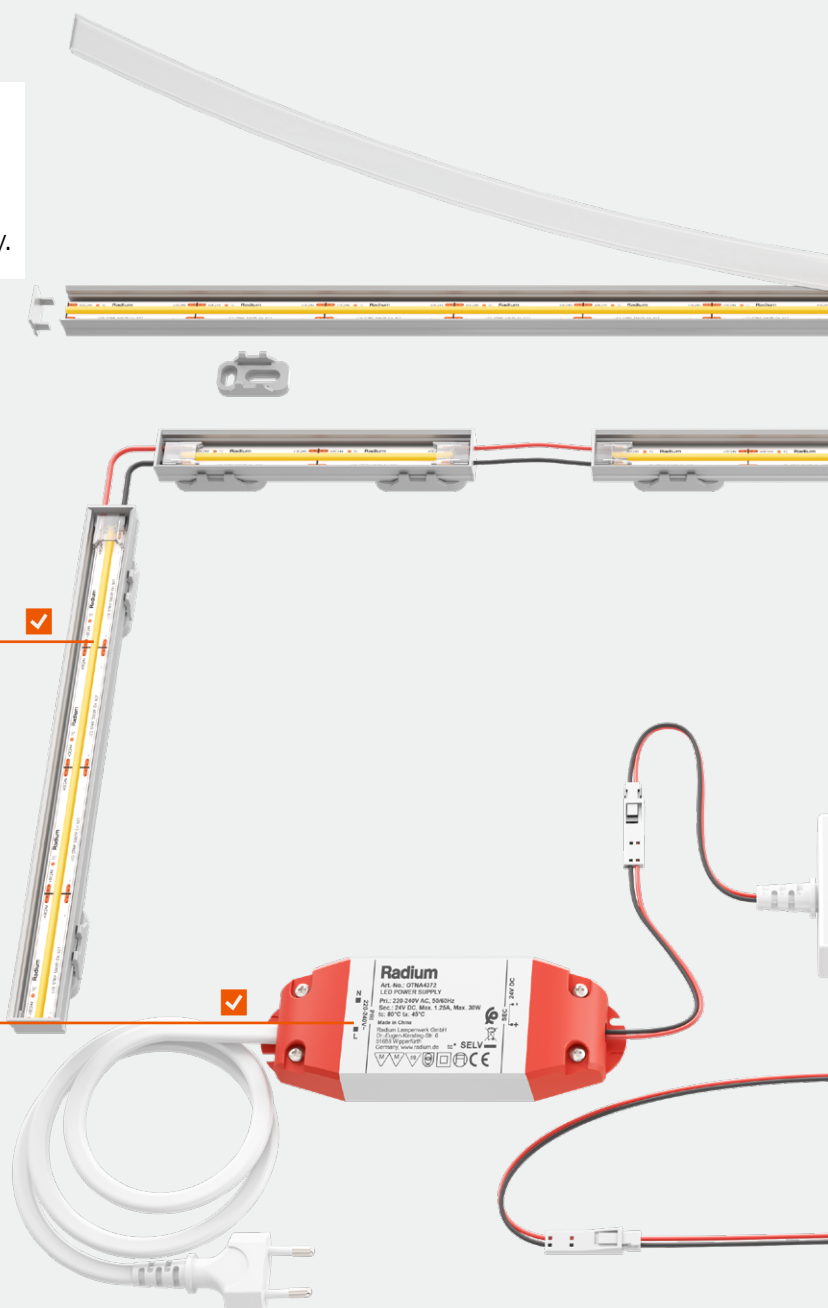




For your  
**Smart Home**



## Make it dimmable: Lighting control makes your home smart!

With the Zigbee controller, you can control your LED Strips easily via remote control. If you have a suitable Zigbee bridge, controller and remote control can be trained to your smart home system. You can also switch and dim your light via app or voice control and call up your individually saved light scenes.

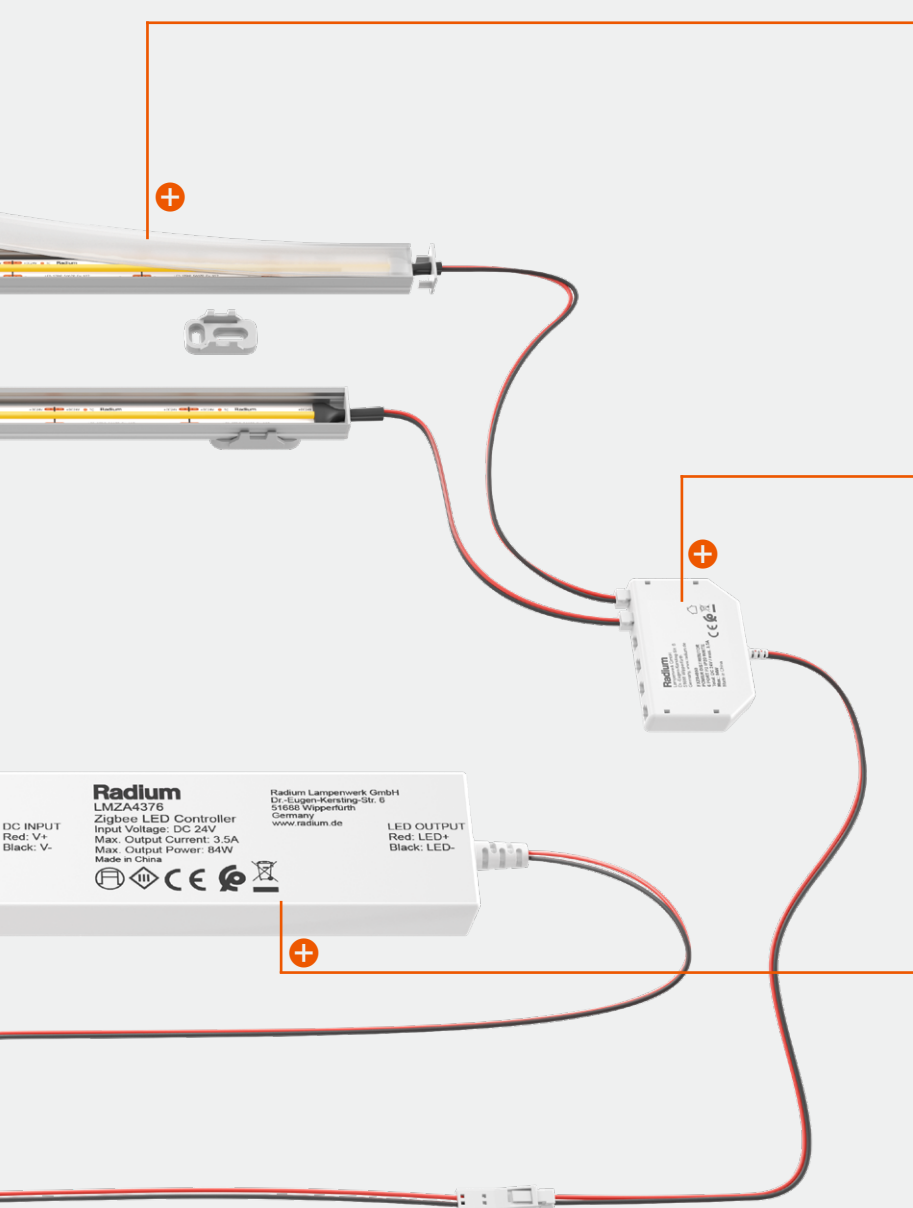

### Step 5

For every application we have the right **profile set** consisting of profile, cover, end caps and brackets including screws.

The profile and cover provide protection for the LEDs. The cover also ensures homogeneous light and less glare.

### Step 3

If you want to use more than one LED Strip on one driver, you will need a **distributor**.

**Hint:** You can also use the distributor to connect several controllers to one driver if the individual strips should be dimmed differently.

### Step 4

Add a **controller** to dim the LED Strips – via remote control, app or smart home assistant. For **white light**, use the **CONTROLLER ZGB WHITE** and for **coloured light** the **CONTROLLER ZGB RGBW**. 🌈

# Innovative Lighting Design. **Realized with Radium.**



The exterior facade of the 'Green Building', an office building in Hanau, was highlighted in a spectacular light by means of waterproof RGB Strips. The strips were glued into a profile that was powder-coated in the colour of the building at the customer's request. Further, it was possible to attach it to the facade using specially manufactured mounting brackets. The lighting system is controlled via a complex DMX control system, with which each window section can be controlled individually and time-dependent scenes and sequences can be stored.

**LED STRIP 500 S**  
**RGB/24V/IP67 (page 38)**

**PROFILE SMALL U 17.3/16/B1C1**  
**(page 60–61)**

**COVER SMALL F 16.4/4/C1**  
**(page 75)**

**DRIVER DALI/DMX 4CH**  
**150W/24V IP20 (page 84)**

**Butler XT2 (Control gear)**

When planning the lighting of the foyer, focus was on homogeneity. Different coves in the entire entrance area of the office building ensure uniform illumination. The indirect lighting was generated by means of an angle profile including diffuse cover, which emits the light of the strips at a 45° angle and so provides for even better distribution in the room.

**LED STRIP 900 S**  
**930/24V (page 20)**

**PROFILE SMALL CORNER**  
**22.8/22.8/B1C1 (page 64–65)**

**COVER SMALL F 16.4/4/C1**  
**(page 75)**

**DRIVER FLAT 90W/24V IP20**  
**RADIUM (page 82)**





In the VIP area of Messe Düsseldorf, individually controllable accent lighting has been set up, which can be operated intuitively by using a smartphone or tablet. This project was implemented with RGB Strips that were mounted behind diffuse panes. The light lets the panes shine homogeneously in the programmed colours. Now, a Bluetooth Casambi controller makes it possible to store specific colours via password-protected access in order to highlight a customer event in the appropriate light.

**LED STRIP 500 S RGB/24V**  
(page 34)

**PROFILE SMALL U 17.3/16/B1C1**  
(page 76-77)

**COVER SMALL F 16.4/4/C1**  
(page 91)

**DRIVER FLAT 250W/24V IP20 RADIUM**  
(page 98)

**CBU-PMW4-LR**  
(page 102)




**LED STRIP 2200 S 940/24V**  
(page 22)

**PROFILE MEDIUM WING 40/25.9/B2C2**  
(page 72-73)

**COVER MEDIUM F 26/5/C2**  
(page 75)

**DRIVER DALI/DMX 4CH**  
150W/24V IP20 (page 84)

Thanks to the linear lighting solution, the conference rooms at Messe Düsseldorf sparkle in a uniform light. At the same time, the bright light of the LED strips provides adequate basic lighting for the rooms. The lighting was installed using an aluminum installation profile that was inserted into the plasterboard ceiling using mounting springs. Due to the symmetrical, linear arrangement of the lighting system, an optically high-quality impression of the entire room is created.

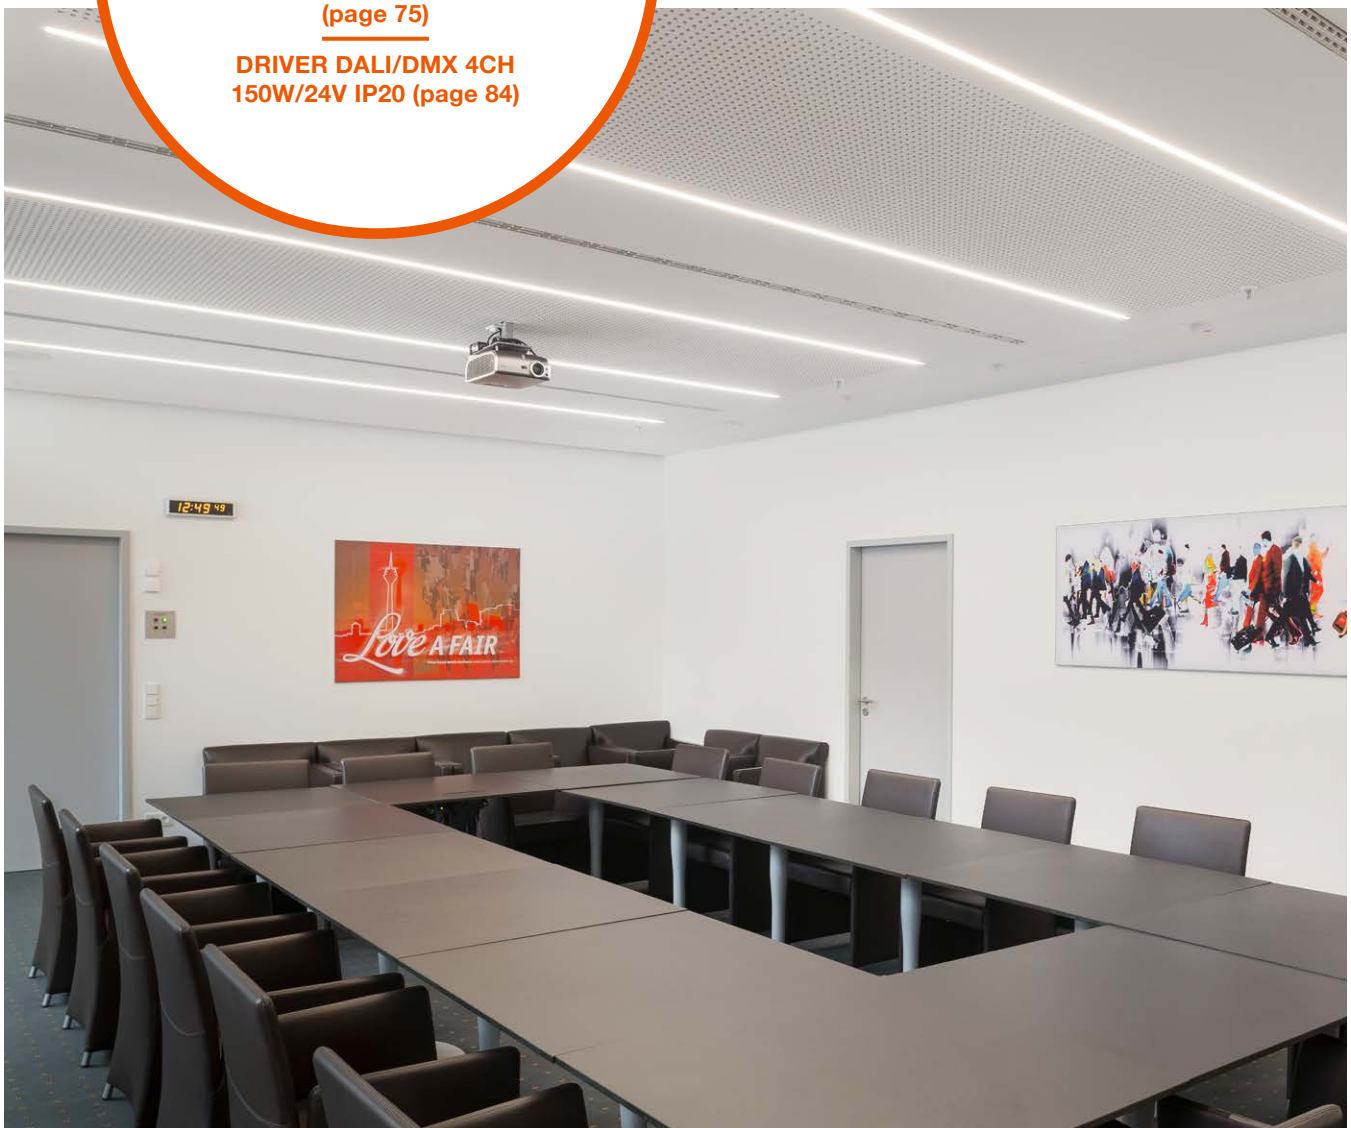


# Products.

## LED Strips.

Whether indoors or outdoors, whether for general or accent lighting, whether for small, medium or large lighting projects: The flexible LED Strips from Radium are versatile, very durable and extremely energy-efficient. They convince both with high-quality materials and careful processing. And thanks to the small LED spacing, they ensure a homogeneous light distribution everywhere without creating shadows between the individual LEDs.

### Product highlights:

- LED Star Strip ZeroPitch & ZeroPitch Furniture: [page 28](#)
- LED Star Strip Tunable White: [page 30](#)
- LED Star Strip WarmDIM: [page 32](#)
- LED Star Strip RGB and RGBW: [page 34](#)
- LED Strip Easy Connect: from [page 56](#)

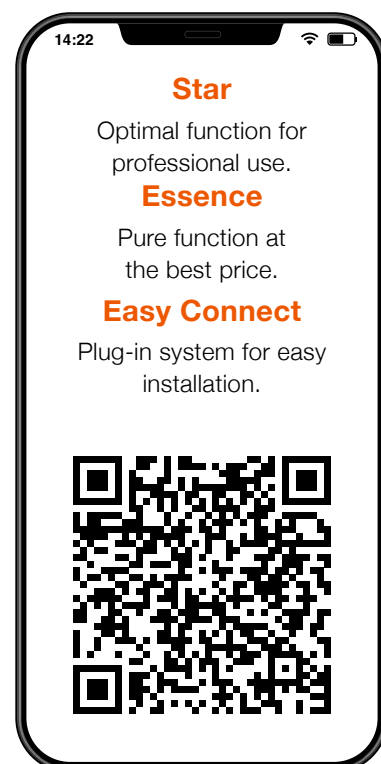

# Content

LED Star Strips	22
LED Star Strips Waterproof	36
LED Essence Strips	42
LED Essence Strips Waterproof	50
LED Strips Easy Connect	56
Accessories	62
Compatibility of Accessories	64



<u>LED STRIP</u>	<u>3000</u>	<u>S</u>	<u>927</u>	/	<u>24V</u>	/	<u>IP67</u>	<u>30M</u>
Product category					Mains voltage in volts (V)			
		Segmentation - „Star“ - „Essence“					IP protection: - IP67 - IP66 - omitted for non-protected strips	
	Lumen package: - 400 - 900 - 1400 - 2200 - 3000 - 1000ZP etc.		Light color: - 927 - 930 - 940 - 965 - RGB - RGBW - TW - TWW - WD					Length of the strips in meters (m): - 3M - 5M - 30M - 50M - IND



# LED Star Strip 400 and 900



## Product features:


- Very long lifespan: **60.000 h L80B50**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24 V DC**
- High colour consistency: **SDCM <3**
- Very high efficiency of up to **162 lm/W**
- Suitable for dry, protected environments

## Advantages:

- Long max. operable length: up to 18 m, without loss of luminous flux thanks to IC and high copper content in PCB
- Centimeter scale on the LED strip
- Particularly large soldering pads
- Homogeneous light with up to **160 LEDs per meter**



1



2



## LED Star Strip 400

mm

Pcs.

1	RSTA4585	LED STRIP 400 S 927/24V 5M	2.8	415	80	●	12.5	D	2	10
1	RSTA4595	LED STRIP 400 S 930/24V 5M	2.8	430	80	●	12.5	D	2	10
1	RSTA4605	LED STRIP 400 S 940/24V 5M	2.8	450	80	○	12.5	D	2	10
1	RSTA4615	LED STRIP 400 S 965/24V 5M*	2.8	445	80	●	12.5	D	2	10

## LED Star Strip 900

2	RSTA4625	LED STRIP 900 S 927/24V 5M	5.6	840	160	●	6.3	D	2	10
2	RSTA4635	LED STRIP 900 S 930/24V 5M	5.6	870	160	●	6.3	D	2	10
2	RSTA4645	LED STRIP 900 S 940/24V 5M	5.6	915	160	○	6.3	D	2	10
2	RSTA4655	LED STRIP 900 S 965/24V 5M*	5.6	905	160	●	6.3	D	2	10

\* LED strips with color temperature 6500 K available on request, only.



## Available lengths

mm


m

Article no.


Article no.

Article no.

1	LED STRIP 400 S 927/24V	100	18	RSTA4585	RSTA4580	RSTA4581
1	LED STRIP 400 S 930/24V	100	18	RSTA4595	RSTA4590	RSTA4591
1	LED STRIP 400 S 940/24V	100	18	RSTA4605	RSTA4600	RSTA4601
1	LED STRIP 400 S 965/24V*	100	18	RSTA4615	RSTA4610	RSTA4611
2	LED STRIP 900 S 927/24V	50	13	RSTA4625	RSTA4620	RSTA4621
2	LED STRIP 900 S 930/24V	50	13	RSTA4635	RSTA4630	RSTA4631
2	LED STRIP 900 S 940/24V	50	13	RSTA4645	RSTA4640	RSTA4641
2	LED STRIP 900 S 965/24V*	50	13	RSTA4655	RSTA4650	RSTA4651

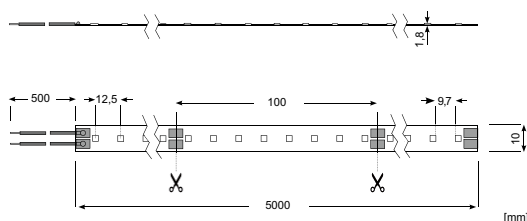

1

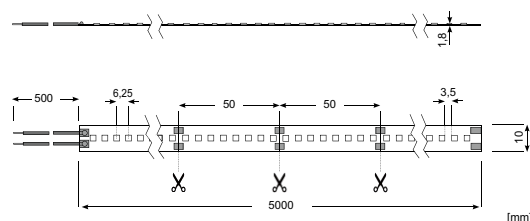

2


## Feed-in connector for LED Strips

**STRIP CON**  
2PIN 10MM/50CM  
FXZA4461



## Strip to strip connector


**STRIP CABLE BRIDGE**  
2PIN 10MM/5CM 4PCS  
FXZA4510




Please refer to [page 62](#) for further product information.

## Profiles


**PROFILE SMALL U FLAT**  
17.3/9.6/B1C1 1M  
TRPA2511




**PROFILE SMALL U**  
17.3/16/B1C1 1M  
TRPA2501



**PROFILE SMALL WING**  
25/13/B1C1 1M  
TRPA2521




**PROFILE SMALL CORNER**  
22.8/22.8/B1C1 1M  
TRPA2531




## Covers


**COVER SMALL F**  
16.4/4/C1 1M  
ZTPA2571




**COVER SMALL SQUARE**  
17/9/C1 1M  
ZTPA3111




**PROFILE MEDIUM U FLAT**  
27/10.2/B2C2 1M  
TRPA2551




**PROFILE MEDIUM U**  
27/25.9/B2C2 1M  
TRPA2541




**PROFILE MEDIUM WING**  
40/25.9/B2C2 1M  
TRPA2561



**COVER MEDIUM F**  
26/5/C2 1M  
ZTPA2591



**COVER MEDIUM SQUARE**  
27/14/C2 1M  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

## LED Drivers

**Not dimmable**

**DRIVER FLAT 36W/24V**  
IP20 RADIUM  
OTNA3102



**Dimmable Phasecut**

**DRIVER PHASECUT 36W/24V**  
IP20 RADIUM  
OTDA4077



**Dimmable DALI**

**DRIVER DALI 1CH 36W/24V**  
IP20 RADIUM  
OTDA4070



**Dimmable Casambi (Bluetooth)**

**DRIVER BT 1CH 35W/24V**  
IP20  
OTDA2443



**LED Star Strip 400** 12.8 m  
**LED Star Strip 900** 6.4 m



**LED Star Strip 400** 12.8 m  
**LED Star Strip 900** 6.4 m



**LED Star Strip 400** 12.8 m  
**LED Star Strip 900** 6.4 m



**LED Star Strip 400** 12.5 m  
**LED Star Strip 900** 6.2 m



Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

# LED Star Strip 1400 and 2200



## Product features:

- Very long lifespan: **60.000 h L80B50**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24 V DC**
- High colour consistency: **SDCM <3**
- Very high efficiency of up to **164 lm/W**
- Suitable for dry, protected environments

## Advantages:

- Long max. operable length without loss of luminous flux thanks to IC and high copper content in PCB
- Centimeter scale on the LED strip
- Particularly large soldering pads
- Homogeneous light with **160 LEDs per meter**



1



## LED Star Strip 1400


						mm			Pcs.
1	RSTA4665	LED STRIP 1400 S 927/24V 5M	9.0	1375	160	6.3	D	2	10
1	RSTA4675	LED STRIP 1400 S 930/24V 5M	9.0	1420	160	6.3	D	2	10
1	RSTA4685	LED STRIP 1400 S 940/24V 5M	9.0	1490	160	6.3	D	2	10
1	RSTA4695	LED STRIP 1400 S 965/24V 5M*	9.0	1475	160	6.3	D	2	10

## LED Star Strip 2200

1	RSTA4705	LED STRIP 2200 S 927/24V 5M	14	2100	160	6.3	D	2	10
1	RSTA4715	LED STRIP 2200 S 930/24V 5M	14	2150	160	6.3	D	2	10
1	RSTA4725	LED STRIP 2200 S 940/24V 5M	14	2250	160	6.3	D	2	10
1	RSTA4735	LED STRIP 2200 S 965/24V 5M*	14	2230	160	6.3	D	2	10


**Note:** For appropriate operation of the LED Strip, an aluminum profile is required for cooling.

\* LED strips with color temperature 6500 K available on request, only.



## Available lengths

	mm	m	Article no.	Article no.	Article no.
1	LED STRIP 1400 S 927/24V	50	10	RSTA4665	RSTA4660 RSTA4661
1	LED STRIP 1400 S 930/24V	50	10	RSTA4675	RSTA4670 RSTA4671
1	LED STRIP 1400 S 940/24V	50	10	RSTA4685	RSTA4680 RSTA4681
1	LED STRIP 1400 S 965/24V*	50	10	RSTA4695	RSTA4690 RSTA4691
1	LED STRIP 2200 S 927/24V	50	7	RSTA4705	RSTA4700 RSTA4701
1	LED STRIP 2200 S 930/24V	50	7	RSTA4715	RSTA4710 RSTA4711
1	LED STRIP 2200 S 940/24V	50	7	RSTA4725	RSTA4720 RSTA4721
1	LED STRIP 2200 S 965/24V*	50	7	RSTA4735	RSTA4730 RSTA4731

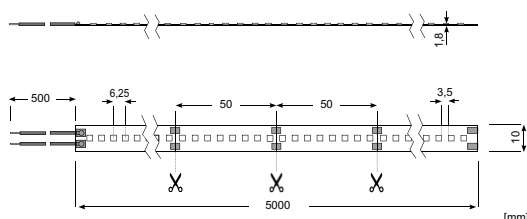

1



## Feed-in connector for LED Strips

**STRIP CON**  
2PIN 10MM/50CM  
FXZA4461



## Strip to strip connector


**STRIP CABLE BRIDGE**  
2PIN 10MM/5CM 4PCS  
FXZA4510




Please refer to [page 62](#) for further product information.

## Profiles


**PROFILE SMALL U FLAT**  
17.3/9.6/B1C1 1M  
TRPA2511




**PROFILE SMALL U**  
17.3/16/B1C1 1M  
TRPA2501



**PROFILE SMALL WING**  
25/13/B1C1 1M  
TRPA2521




**PROFILE SMALL CORNER**  
22.8/22.8/B1C1 1M  
TRPA2531




## Covers


**COVER SMALL F**  
16.4/4/C1 1M  
ZTPA2571




**COVER SMALL SQUARE**  
17/9/C1 1M  
ZTPA3111




**PROFILE MEDIUM U FLAT**  
27/10.2/B2C2 1M  
TRPA2551




**PROFILE MEDIUM U**  
27/25.9/B2C2 1M  
TRPA2541




**PROFILE MEDIUM WING**  
40/25.9/B2C2 1M  
TRPA2561



**COVER MEDIUM F**  
26/5/C2 1M  
ZTPA2591



**COVER MEDIUM SQUARE**  
27/14/C2 1M  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

## LED Drivers

### Not dimmable

**DRIVER FLAT 60W/24V**  
IP20 RADIUM  
OTNA3103



### Dimmable Phasecut

**DRIVER PHASECUT 75W/24V**  
IP20 RADIUM  
OTDA3026



### Dimmable DALI

**DRIVER DALI 1CH 75W/24V**  
IP20 RADIUM  
OTDA4071



### Dimmable Casambi (Bluetooth)

**DRIVER BT 1CH 60W/24V**  
IP20  
OTDA2444



**LED Star Strip 1400** 6.6m  
**LED Star Strip 2200** 4.2 m



**LED Star Strip 1400** 8.3 m  
**LED Star Strip 2200** 5.3 m



**LED Star Strip 1400** 8.3 m  
**LED Star Strip 2200** 5.3 m



**LED Star Strip 1400** 6.6 m  
**LED Star Strip 2200** 4.2 m



Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

## LED Star Strip 3000



### Product features:

- Very long lifespan: **60.000 h L80B50**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24 V DC**
- High colour consistency: **SDCM <3**
- High efficiency of up to **160 lm/W**
- Suitable for dry, protected environments

### Advantages:

- Long max. operable length without loss of luminous flux thanks to IC and high copper content in PCB
- Centimeter scale on the LED strip
- Particularly large soldering pads
- Homogeneous light with **160 LEDs per meter**



1



### LED Star Strip 3000

						mm			Pcs.
1	RSTA4745	<b>LED STRIP 3000 S 927/24V 5M</b>	20.0	2920	160	●	6.3	D	2
1	RSTA4755	<b>LED STRIP 3000 S 930/24V 5M</b>	20.0	3010	160	●	6.3	D	2
1	RSTA4765	<b>LED STRIP 3000 S 940/24V 5M</b>	20.0	3160	160	○	6.3	D	2
1	RSTA4775	<b>LED STRIP 3000 S 965/24V 5M*</b>	20.0	3130	160	●	6.3	D	2


**Note:** For appropriate operation of the LED Strip, an aluminum profile is required for cooling.

\* LED strips with color temperature 6500 K available on request, only.



### Available lengths

	mm	m	Article no.	Article no.	Article no.
1	<b>LED STRIP 3000 S 927/24V</b>	50	5	RSTA4745	RSTA4740
1	<b>LED STRIP 3000 S 930/24V</b>	50	5	RSTA4755	RSTA4750
1	<b>LED STRIP 3000 S 940/24V</b>	50	5	RSTA4765	RSTA4760
1	<b>LED STRIP 3000 S 965/24V*</b>	50	5	RSTA4775	RSTA4770

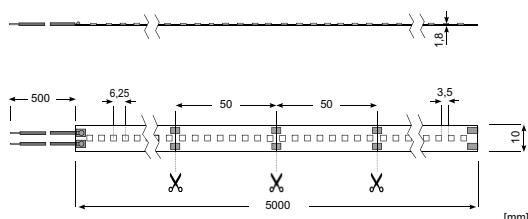

1

## Feed-in connector for LED Strips

**STRIP CON**  
2PIN 10MM/50CM  
FXZA4461



## Strip to strip connector


**STRIP CABLE BRIDGE**  
2PIN 10MM/5CM 4PCS  
FXZA4510




Please refer to [page 62](#) for further product information.

## Profiles


**PROFILE SMALL U FLAT**  
17.3/9.6/B1C1 1M  
TRPA2511




**PROFILE SMALL U**  
17.3/16/B1C1 1M  
TRPA2501



**PROFILE SMALL WING**  
25/13/B1C1 1M  
TRPA2521




**PROFILE SMALL CORNER**  
22.8/22.8/B1C1 1M  
TRPA2531




## Covers


**COVER SMALL F**  
16.4/4/C1 1M  
ZTPA2571




**COVER SMALL SQUARE**  
17/9/C1 1M  
ZTPA3111




**PROFILE MEDIUM U FLAT**  
27/10.2/B2C2 1M  
TRPA2551




**PROFILE MEDIUM U**  
27/25.9/B2C2 1M  
TRPA2541




**PROFILE MEDIUM WING**  
40/25.9/B2C2 1M  
TRPA2561



**COVER MEDIUM F**  
26/5/C2 1M  
ZTPA2591



**COVER MEDIUM SQUARE**  
27/14/C2 1M  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

## LED Drivers

**Not dimmable**

**DRIVER FLAT 120W/24V IP20**  
RADIUM  
OTNA3105



**LED Star Strip 3000**



6.0 m

**Dimmable Phasecut**

**DRIVER PHASECUT 75W/24V**  
IP20 RADIUM  
OTDA3026



**LED Star Strip 3000**



3.7 m

**Dimmable DALI**

**DRIVER DALI 1CH 100W/24V**  
IP20 RADIUM  
OTDA4072



**LED Star Strip 3000**



5.0 m

**Dimmable Casambi (Bluetooth)**

**DRIVER BT 1CH 100W/24V**  
IP20 TRIDONIC  
OTDA2445



**LED Star Strip 3000**



5.0 m

Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.



# LED Star Strip 1000 ZeroPitch and 400 ZeroPitch Furniture



## Product features:

- Very long lifespan: **60.000 h L70B10**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24V DC**
- Wide beam angle: **160°**
- Suitable for dry, protected environments

## Advantages:

- Continuous light line without LED dots
- Perfectly suited for use in super-flat profiles or for furniture installation
- Low glare compared to SMD LEDs



1



2



## LED Star Strip 1000 ZeroPitch

mm

Pcs.

1	RSTA2945	LED STRIP 1000ZP S 927/24V 5M	10.0	820	544		-	G	2	10
1	RSTA2955	LED STRIP 1000ZP S 930/24V 5M	10.0	900	544		-	G	2	10
1	RSTA2965	LED STRIP 1000ZP S 940/24V 5M	10.0	980	544		-	F	2	10
1	RSTA2975	LED STRIP 1000ZP S 965/24V 5M*	10.0	1000	544		-	F	2	10

## LED Star Strip 400 ZeroPitch Furniture

2	RSTA3783	LED STRIP 400ZPF S 927/24V 3M	4.5	320	420		-	G	2	10
2	RSTA3793	LED STRIP 400ZPF S 930/24V 3M	4.5	350	420		-	G	2	10
2	RSTA3803	LED STRIP 400ZPF S 940/24V 3M	4.5	400	420		-	G	2	10

\* LED strips with color temperature 6500 K available on request, only.



## Available lengths

mm

m


Article no.

Article no.


Article no.

1	LED STRIP 1000ZP S 927/24V	29.4	5	RSTA2945	RSTA2940	RSTA2941
1	LED STRIP 1000ZP S 930/24V	29.4	5	RSTA2955	RSTA2950	RSTA2951
1	LED STRIP 1000ZP S 940/24V	29.4	5	RSTA2965	RSTA2960	RSTA2961
1	LED STRIP 1000ZP S 965/24V*	29.4	5	RSTA2975	RSTA2970	RSTA2971
2	LED STRIP 400ZPF S 927/24V	16.7	3	RSTA3783	-	-
2	LED STRIP 400ZPF S 930/24V	16.7	3	RSTA3793	-	-
2	LED STRIP 400ZPF S 940/24V	16.7	3	RSTA3803	-	-

\*\*Note: 3 meters for LED STRIP 400ZPF

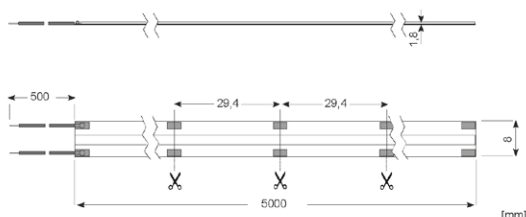

1

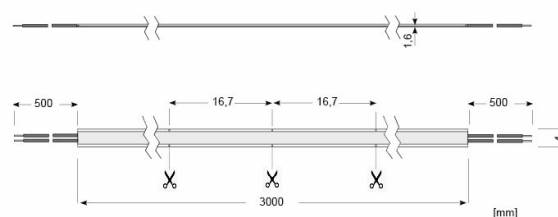

2

## Individual Cut

### SERVICE CUT STRIP

Our ZeroPitch LED strips are assembled exactly according to your specifications. The individual lengths are delivered with 0.5 m long soldered cable as standard.

For more information on customizing, please refer to [page 11](#).

## Feed-in connector for LED Strips

**STRIP CON 2PIN**  
8MM/50CM\*  
FXZA4460




Please refer to [page 62](#) for further product information.


\*Note: Not compatible with LED Star Strip ZeroPitch Furniture.

## Profiles


**PROFILE SMALL U FLAT**  
17.3/9.6/B1C1 1M  
TRPA2511




**PROFILE SMALL U**  
17.3/16/B1C1 1M  
TRPA2501



**PROFILE SMALL WING**  
25/13/B1C1 1M  
TRPA2521




**PROFILE SMALL CORNER**  
22.8/22.8/B1C1 1M  
TRPA2531




## Covers


**COVER SMALL F**  
16.4/4/C1 1M  
ZTPA2571




**COVER SMALL SQUARE**  
17/9/C1 1M  
ZTPA3111




**PROFILE MEDIUM U FLAT**  
27/10.2/B2C2 1M  
TRPA2551




**PROFILE MEDIUM U**  
27/25.9/B2C2 1M  
TRPA2541




**PROFILE MEDIUM WING**  
40/25.9/B2C2 1M  
TRPA2561



**COVER MEDIUM F**  
26/5/C2 1M  
ZTPA2591



**COVER MEDIUM SQUARE**  
27/14/C2 1M  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

## LED Drivers

### Not dimmable

**DRIVER FLAT 60W/24V**  
IP20 RADIUM  
OTNA3103



### Dimmable Phasecut

**DRIVER PHASECUT 75W/24V**  
IP20 RADIUM  
OTDA3026



### Dimmable DALI

**DRIVER DALI 2CH 75W/24V**  
IP20 RADIUM  
OTDA4074



### Dimmable Casambi (Bluetooth)

**DRIVER BT 1CH 60W/24V IP20**  
TRIDONIC  
OTDA2444



### LED Star Strip

1000 ZeroPitch	6.0 m
400 ZeroPitch Furniture	13.3 m

### LED Star Strip

1000 ZeroPitch	7.5 m
400 ZeroPitch Furniture	16.6 m

### LED Star Strip

1000 ZeroPitch	7.5 m
400 ZeroPitch Furniture	16.6 m

### LED Star Strip

1000 ZeroPitch	6.0 m
400 ZeroPitch Furniture	13.3 m

Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

## LED Star Strip 2000 and 3100 Tunable White




### Product features 2000 TW:

- Very long lifespan: **60.000 h L70B10**
- Very good colour rendering: **CRI >80**
- Suitable for operation on **24 V DC**
- Variable colour temperature: **Tunable White (2700-6500 K) and Tunable Warmwhite (2200-4000 K)**
- Suitable for dry, protected environments

### Product features 3100 TW:

- Very long lifespan: **60.000 h L80B50**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24 V DC**
- Variable colour temperature: **Tunable White (2700-6500 K)**
- Suitable for dry, protected environments



1



2



### LED Star Strip 2000 Tunable White

mm

Pcs.

1	RSTA2205	LED STRIP 2000 S TWW/24V 5M	19.2	1950	140		14.3	F	3	10
1	RSTA2195	LED STRIP 2000 S TW/24V 5M	19.2	2020	140		14.3	F	3	10

### LED Star Strip 3100 Tunable White

2	RSTA4785	LED STRIP 3100 S TW/24V 5M	20.5	3100	160		12.5	D	3	10
---	----------	----------------------------	------	------	-----	--	------	---	---	----

**Note:** For appropriate operation of the LED Strip, an aluminum profile is required for cooling.



### Available lengths

mm


m

Article no.


Article no.

Article no.

1	LED STRIP 2000 S TWW/24V	100	7	RSTA2205	RSTA2200	RSTA2201
1	LED STRIP 2000 S TW/24V	100	7	RSTA2195	RSTA2190	RSTA2191
2	LED STRIP 3100 S TW/24V	100	5	RSTA4785	RSTA4780	RSTA4781

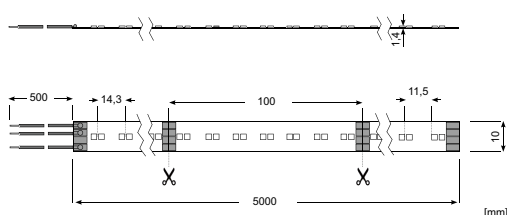

1

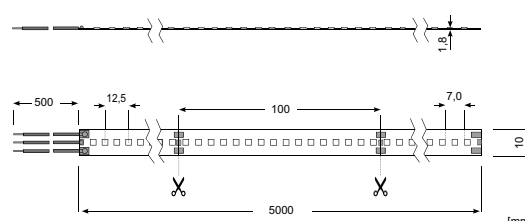

2



## Individual Cut


### SERVICE CUT STRIP

Our Tunable White LED Strip will be assembled centimetre-precise according to your specifications. The individual lengths are delivered with 0.5 m long soldered cable as standard.


For more information on customizing, please refer to [page 11](#).

### Profiles


**PROFILE SMALL U FLAT**  
17.3/9.6/B1C1 1M  
TRPA2511




**PROFILE SMALL U**  
17.3/16/B1C1 1M  
TRPA2501



**PROFILE SMALL WING**  
25/13/B1C1 1M  
TRPA2521




**PROFILE SMALL CORNER**  
22.8/22.8/B1C1 1M  
TRPA2531




### Covers


**COVER SMALL F**  
16.4/4/C1 1M  
ZTPA2571




**COVER SMALL SQUARE**  
17/9/C1 1M  
ZTPA3111




**PROFILE MEDIUM U FLAT**  
27/10.2/B2C2 1M  
TRPA2551




**PROFILE MEDIUM U**  
27/25.9/B2C2 1M  
TRPA2541




**PROFILE MEDIUM WING**  
40/25.9/B2C2 1M  
TRPA2561



**COVER MEDIUM F**  
26/5/C2 1M  
ZTPA2591



**COVER MEDIUM SQUARE**  
27/14/C2 1M  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

### LED Drivers

#### Dimmable DALI

**DRIVER DALI 2CH 75W/24V**  
IP20 RADIUM  
OTDA4074



#### Dimmable DALI

**DRIVER DALI 2CH 150W/24V**  
IP20 RADIUM  
OTDA4075



### LED Dimmers

#### Light control Zigbee\*

**DIMMER ZIGBEE 5CH**  
480W/12-24V IP20  
LMZA4000



#### Light control Casambi (PWM4)\*

**CBU-PWM4-LR**  
LMBA4969



LED Star Strip 2000 TW	3.9 m
LED Star Strip 2000 TWW	3.9 m
LED Star Strip 3100 TW	3.6 m



LED Star Strip 2000 TW	7.8 m
LED Star Strip 2000 TWW	7.8 m
LED Star Strip 3100 TW	7.3 m



LED Star Strip 2000 TW	25.0 m
LED Star Strip 2000 TWW	25.0 m
LED Star Strip 3100 TW	23.4 m



LED Star Strip 2000 TW	7.5 m
LED Star Strip 2000 TWW	7.5 m
LED Star Strip 3100 TW	7.0 m



Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

\*Note: A 24V DC LED driver is required for operation.

## LED Star Strip 900 and 1500 WarmDIM



### Product features:

- Very long lifespan: **60.000 h L70B10**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24 V DC**
- High colour consistency: **SDCM <3**
- Suitable for dry, protected environments

### Advantages:

- Automatic adaption of lighting mood while dimming down
- Warm white light at 100% and super warm white light, when dimmed (4000–1900 K / 3000–1900 K)
- No need for two-channel DALI dimmer or any other control unit
- Optimized dimming curve for an accurate transition



1




### LED Star Strip 900 and 1500 WarmDIM

							mm		Pcs.
1	RSTA2905	<b>LED STRIP 900WD S 930-919/24V 5M</b>	10.0	890	168		11.9	G	10
1	RSTA2915	<b>LED STRIP 900WD S 940-919/24V 5M</b>	10.0	950	168		11.9	F	10
1	RSTA2925	<b>LED STRIP 1500WD S 930-919/24V 5M</b>	14.4	1410	168		11.9	F	10
1	RSTA2935	<b>LED STRIP 1500WD S 940-919/24V 5M</b>	14.4	1500	168		11.9	F	10



### Available lengths

	mm	m	Article no.	Article no.	Article no.
1	<b>LED STRIP 900WD S 930-919/24V</b>	83.3	5	RSTA2905	RSTA2900 RSTA2901
1	<b>LED STRIP 900WD S 940-919/24V</b>	83.3	5	RSTA2915	RSTA2910 RSTA2911
1	<b>LED STRIP 1500WD S 930-919/24V</b>	83.3	5	RSTA2925	RSTA2920 RSTA2921
1	<b>LED STRIP 1500WD S 940-919/24V</b>	83.3	5	RSTA2935	RSTA2930 RSTA2931

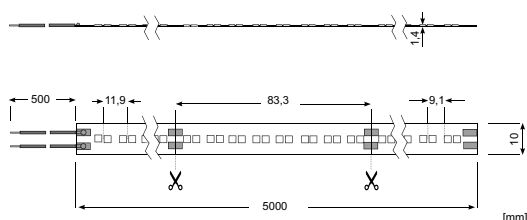

1

## Feed-in connector for LED Strips


**STRIP CON 2PIN**  
**10MM/50CM**  
**FXZA4461**




Please refer to [page 62](#) for further product information.

## Profiles


**PROFILE SMALL U FLAT**  
**17.3/9.6/B1C1 1M**  
**TRPA2511**




**PROFILE SMALL U**  
**17.3/16/B1C1 1M**  
**TRPA2501**



**PROFILE SMALL WING**  
**25/13/B1C1 1M**  
**TRPA2521**




**PROFILE SMALL CORNER**  
**22.8/22.8/B1C1 1M**  
**TRPA2531**




## Covers


**COVER SMALL F**  
**16.4/4/C1 1M**  
**ZTPA2571**




**COVER SMALL SQUARE**  
**17/9/C1 1M**  
**ZTPA3111**




**PROFILE MEDIUM U FLAT**  
**27/10.2/B2C2 1M**  
**TRPA2551**




**PROFILE MEDIUM U**  
**27/25.9/B2C2 1M**  
**TRPA2541**




**PROFILE MEDIUM WING**  
**40/25.9/B2C2 1M**  
**TRPA2561**



**COVER MEDIUM F**  
**26/5/C2 1M**  
**ZTPA2591**



**COVER MEDIUM SQUARE**  
**27/14/C2 1M**  
**ZTPA3121**



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

## LED Drivers

**Dimmable Phasecut**

**DRIVER PHASECUT 75W/24V**  
**IP20 RADIUM**  
**OTDA3026**



**Dimmable DALI**

**DRIVER DALI 1CH 100W/24V**  
**IP20**  
**OTDA4072**



**Dimmable Casambi (Bluetooth)**

**DRIVER BT 1CH 100W/24V**  
**IP20 TRIDONIC**  
**OTDA2445**



## LED Dimmer

**Light control Casambi (PWM4)\***

**CBU-PWM4-LR**  
**LMBA4969**



**LED Star Strip**

<b>900 WarmDIM</b>	7.5 m
<b>1500 WarmDIM</b>	5.2 m



**LED Star Strip**

<b>900 WarmDIM</b>	10.0 m
<b>1500 WarmDIM</b>	6.9 m



**LED Star Strip**

<b>900 WarmDIM</b>	10.0 m
<b>1500 WarmDIM</b>	6.9 m



**LED Star Strip**

<b>900 WarmDIM</b>	14.4 m
<b>1500 WarmDIM</b>	10.0 m



Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

\*Note: A 24V DC LED driver is required for operation.



## LED Star Strip 500 RGB and 700 RGBW



### Product features:

- Long lifespan: **30.000 h L70B10**
- Dynamic coloured light due to RGB LEDs
- Suitable for operation on **24 V DC**
- Optimal function with multi-channel LED dimmers
- Suitable for dry, protected environments



### LED Star Strip 500 RGB

						mm	Pcs.
1	RSTA2175	LED STRIP 500 S RGB/24V 5M*	14.4	560	70	14.3	10

### LED Star Strip 700 RGBW



2	RSTA2185	LED STRIP 700 S RGBW/24V 5M	12.0	700	70	14.3	10
---	----------	-----------------------------	------	-----	----	------	----

\*Note: For appropriate operation of the LED Strip, an aluminum profile is required for cooling.



### Available lengths

	mm	m	Article no.	Article no.	Article no.
1 LED STRIP 500 S RGB/24V	100	7	RSTA2175	RSTA2170	RSTA2171
2 LED STRIP 700 S RGBW/24V	100	8	RSTA2185	RSTA2180	RSTA2181

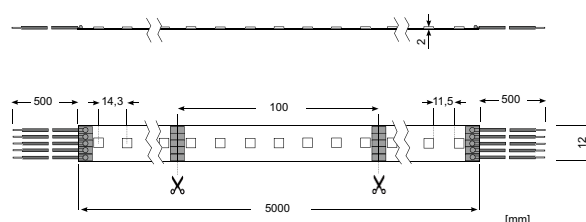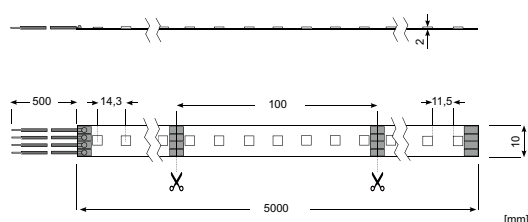

## Feed-in connector for LED Strips

**STRIP CON CP**  
4PIN 10MM/50CM\*  
FXZA2471



## Strip to strip connector

**STRIP CABLE BRIDGE CP**  
4PIN 10MM/5CM\*  
FXZA2478



**STRIP BRIDGE CP**  
4PIN 10MM\*  
FXZA2476




Please refer to [page](#) for further product information.


\*Note: Not compatible with LED Star Strip 700 RGBW. Accessory compatibility on [page 64-65](#).

## Profiles


**PROFILE SMALL U FLAT**  
17.3/9.6/B1C1 1M  
TRPA2511




**PROFILE SMALL U**  
17.3/16/B1C1 1M  
TRPA2501



**PROFILE SMALL WING**  
25/13/B1C1 1M  
TRPA2521




**PROFILE SMALL CORNER**  
22.8/22.8/B1C1 1M  
TRPA2531




## Covers


**COVER SMALL F**  
16.4/4/C1 1M  
ZTPA2571




**COVER SMALL SQUARE**  
17/9/C1 1M  
ZTPA3111




**PROFILE MEDIUM U FLAT**  
27/10.2/B2C2 1M  
TRPA2551




**PROFILE MEDIUM U**  
27/25.9/B2C2 1M  
TRPA2541




**PROFILE MEDIUM WING**  
40/25.9/B2C2 1M  
TRPA2561



**COVER MEDIUM F**  
26/5/C2 1M  
ZTPA2591



**COVER MEDIUM SQUARE**  
27/14/C2 1M  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

## LED Drivers

**Dimmable DALI/DMX**

**DRIVER DALI/DMX 4CH 150W/24V**  
IP20 RADIUM  
OTDA4076



**LED Star Strip**

<b>500 RGB</b>	10.4 m
<b>700 RGBW</b>	12.5 m

## LED Dimmers

**Light control Zigbee\***

**DIMMER ZIGBEE 5CH**  
480W/12-24V IP20  
LMZA4000



**LED Star Strip**

<b>500 RGB</b>	19.0 m
<b>700 RGBW</b>	24.0 m

**Light control Casambi (PWM4)\***

**CBU-PWM4-LR**  
LMBA4969



**LED Star Strip**

<b>500 RGB</b>	10.0 m
<b>700 RGBW</b>	12.0 m

Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

\*Note: A 24V DC LED driver is required for operation.

# LED Star Strip 400 and 800 Waterproof



## Product features:

- Very long lifespan: **60.000 h L80B50**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24 V DC**
- High degree of protection thanks to high-quality silicone encapsulation: **IP67**
- Very high efficiency of up to **147 lm/W**

## Advantages:

- Long max. operable length without loss of luminous flux thanks to IC and high copper content in PCB
- Homogeneous light with **160 LEDs per meter**
- Protection against UV radiation, chlorine and common cleaning agents



1



2



## LED Star Strip 400 Waterproof

						mm			Pcs.
1	RSTA4795	LED STRIP 400 S 927/24V/IP67 5M	2.8	375	80	12.5	E	2	10
1	RSTA4805	LED STRIP 400 S 930/24V/IP67 5M	2.8	390	80	12.5	E	2	10
1	RSTA4815	LED STRIP 400 S 940/24V/IP67 5M	2.8	405	80	12.5	E	2	10
1	RSTA4825	LED STRIP 400 S 965/24V/IP67 5M*	2.8	400	80	12.5	E	2	10

## LED Star Strip 800 Waterproof


2	RSTA4835	LED STRIP 800 S 927/24V/IP67 5M	5.6	755	160	6.3	E	2	10
2	RSTA4845	LED STRIP 800 S 930/24V/IP67 5M	5.6	780	160	6.3	E	2	10
2	RSTA4855	LED STRIP 800 S 940/24V/IP67 5M	5.6	825	160	6.3	D	2	10
2	RSTA4865	LED STRIP 800 S 965/24V/IP67 5M*	5.6	815	160	6.3	E	2	10

\* LED strips with color temperature 6500 K available on request, only.




## Available lengths

	mm	m	Article no.	Article no.	Article no.
1 LED STRIP 400 S 927/24V/IP67	100	18	RSTA4795	RSTA4790	RSTA4791
1 LED STRIP 400 S 930/24V/IP67	100	18	RSTA4805	RSTA4800	RSTA4801
1 LED STRIP 400 S 940/24V/IP67	100	18	RSTA4815	RSTA4810	RSTA4811
1 LED STRIP 400 S 965/24V/IP67*	100	18	RSTA4825	RSTA4820	RSTA4821
2 LED STRIP 800 S 927/24V/IP67	50	13	RSTA4835	RSTA4830	RSTA4831
2 LED STRIP 800 S 930/24V/IP67	50	13	RSTA4845	RSTA4840	RSTA4841
2 LED STRIP 800 S 940/24V/IP67	50	13	RSTA4855	RSTA4850	RSTA4851
2 LED STRIP 800 S 965/24V/IP67*	50	13	RSTA4865	RSTA4860	RSTA4861

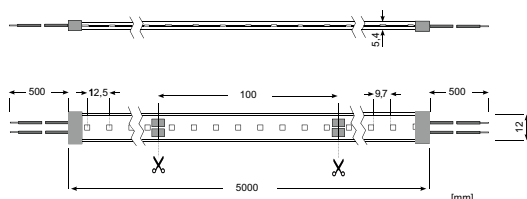

1

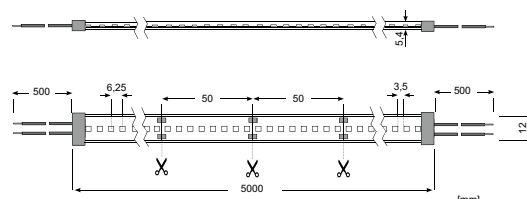

2




## Individual Cut

### SERVICE CUT STRIP

We would be happy to assemble our waterproof LED-Strips according to your specifications. The individual lengths are supplied with an IP67 cable on every one of both ends.

## Accessories for waterproof strips


(A corresponding number of end caps and accessories are included with the waterproof LED Strips)




For more information on customizing, please refer to [page 11](#).

## Profiles


**PROFILE SMALL U FLAT**  
17.3/9.6/B1C1 1M\*  
TRPA2511




**PROFILE SMALL U**  
17.3/16/B1C1 1M  
TRPA2501



**PROFILE SMALL WING**  
25/13/B1C1 1M  
TRPA2521




**PROFILE SMALL CORNER**  
22.8/22.8/B1C1 1M  
TRPA2531




## Covers


**COVER SMALL F**  
16.4/4/C1 1M  
ZTPA2571




**COVER SMALL SQUARE**  
17/9/C1 1M  
ZTPA3111




**PROFILE MEDIUM U FLAT**  
27/10.2/B2C2 1M\*  
TRPA2551




**PROFILE MEDIUM U**  
27/25.9/B2C2 1M  
TRPA2541




**PROFILE MEDIUM WING**  
40/25.9/B2C2 1M  
TRPA2561



**COVER MEDIUM F**  
26/5/C2 1M  
ZTPA2591



**COVER MEDIUM SQUARE**  
27/14/C2 1M  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

\*Only compatible with waterproof LED Strips without cover.

## LED Drivers

### Not dimmable

**DRIVER 75W/24V IP67**  
MeanWell  
OTNA2450



**LED Star Strip 400 IP67** 26.7 m  
**LED Star Strip 800 IP67** 13.3 m

### Dimmable 1-10V

**DRIVER 1-10V 20W/24V**  
IP66 OSRAM  
OTDA2424



**LED Star Strip 400 IP67** 7.1 m  
**LED Star Strip 800 IP67** 3.5 m

### Dimmable DALI

**DRIVER DALI 4CH 100W/24V**  
IP67  
OTDA4107



**LED Star Strip 400 IP67** 35.7 m  
**LED Star Strip 800 IP67** 17.8 m

### Dimmable Casambi (Bluetooth)

**DRIVER BT 1CH 35W/24V**  
IP20  
OTDA2443



**LED Star Strip 400 IP67** 12.5 m  
**LED Star Strip 800 IP67** 6.2 m

Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

## LED Star Strip 1300 and 2000 Waterproof




### Product features:

- Very long lifespan: **60.000 h L80B50**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24 V DC**
- High degree of protection thanks to high-quality silicone encapsulation: **IP67**
- Very high efficiency of up to **149 lm/W**

### Advantages:

- Long max. operable length without loss of luminous flux thanks to IC and high copper content in PCB
- Homogeneous light with **160 LEDs per meter**
- Protection against UV radiation, chlorine and common cleaning agents



1



### LED Star Strip 1300 Waterproof

							mm			Pcs.
1	RSTA4875	LED STRIP 1300 S 927/24V/IP67 5M	9.0	1240	160	●	6.3	E	2	10
1	RSTA4885	LED STRIP 1300 S 930/24V/IP67 5M	9.0	1280	160	●	6.3	E	2	10
1	RSTA4895	LED STRIP 1300 S 940/24V/IP67 5M	9.0	1340	160	○	6.3	D	2	10
1	RSTA4905	LED STRIP 1300 S 965/24V/IP67 5M*	9.0	1330	160	●	6.3	D	2	10

### LED Star Strip 2000 Waterproof

1	RSTA4915	LED STRIP 2000 S 927/24V/IP67 5M	14.0	1890	160	●	6.3	E	2	10
1	RSTA4925	LED STRIP 2000 S 930/24V/IP67 5M	14.0	1935	160	●	6.3	E	2	10
1	RSTA4935	LED STRIP 2000 S 940/24V/IP67 5M	14.0	2025	160	○	6.3	E	2	10
1	RSTA4945	LED STRIP 2000 S 965/24V/IP67 5M*	14.0	2010	160	●	6.3	E	2	10


**Note:** For appropriate operation of the LED Strip, an aluminum profile is required for cooling.

\* LED strips with color temperature 6500 K available on request, only.



### Available lengths

		mm	m	Article no.	Article no.	Article no.
1	LED STRIP 1300 S 927/24V/IP67	50	10	RSTA4875	RSTA4870	RSTA4871
1	LED STRIP 1300 S 930/24V/IP67	50	10	RSTA4885	RSTA4880	RSTA4881
1	LED STRIP 1300 S 940/24V/IP67	50	10	RSTA4895	RSTA4890	RSTA4891
1	LED STRIP 1300 S 965/24V/IP67*	50	10	RSTA4905	RSTA4900	RSTA4901
1	LED STRIP 2000 S 927/24V/IP67	50	7	RSTA4915	RSTA4910	RSTA4911
1	LED STRIP 2000 S 930/24V/IP67	50	7	RSTA4925	RSTA4920	RSTA4921
1	LED STRIP 2000 S 940/24V/IP67	50	7	RSTA4935	RSTA4930	RSTA4931
1	LED STRIP 2000 S 965/24V/IP67*	50	7	RSTA4945	RSTA4940	RSTA4941

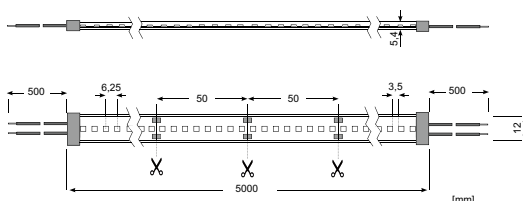

1


## Individual Cut

### SERVICE CUT STRIP

We would be happy to assemble our waterproof LED-Strips according to your specifications. The individual lengths are supplied with an IP67 cable on every one of both ends.

## Accessories for waterproof strips


(A corresponding number of end caps and accessories are included with the waterproof LED Strips)




For more information on customizing, please refer to [page 11](#).

## Profiles


**PROFILE SMALL U FLAT**  
17.3/9.6/B1C1 1M\*  
TRPA2511




**PROFILE SMALL U**  
17.3/16/B1C1 1M  
TRPA2501



**PROFILE SMALL WING**  
25/13/B1C1 1M  
TRPA2521




**PROFILE SMALL CORNER**  
22.8/22.8/B1C1 1M  
TRPA2531




## Covers


**COVER SMALL F**  
16.4/4/C1 1M  
ZTPA2571




**COVER SMALL SQUARE**  
17/9/C1 1M  
ZTPA3111




**PROFILE MEDIUM U FLAT**  
27/10.2/B2C2 1M\*  
TRPA2551




**PROFILE MEDIUM U**  
27/25.9/B2C2 1M  
TRPA2541




**PROFILE MEDIUM WING**  
40/25.9/B2C2 1M  
TRPA2561



**COVER MEDIUM F**  
26/5/C2 1M  
ZTPA2591



**COVER MEDIUM SQUARE**  
27/14/C2 1M  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 58 ff.](#)

\*Only compatible with waterproof LED Strips without cover.

## LED Drivers

Not dimmable

**DRIVER 75W/24V**  
IP67 MeanWell  
OTNA2450



**LED Star Strip 1500 IP67** 8.3 m  
**LED Star Strip 1900 IP67** 5.3 m

Dimmable 1-10V

**DRIVER 1-10V 60W/24V**  
IP66 OSRAM  
OTDA2426



**LED Star Strip 1500 IP67** 6.6 m  
**LED Star Strip 1900 IP67** 4.2 m

Dimmable DALI

**DRIVER DALI 4CH 100W/24V**  
IP67  
OTDA4107



**LED Star Strip 1500 IP67** 11.1 m  
**LED Star Strip 1900 IP67** 7.1 m

## LED Dimmer

Light control Casambi (PWM4)\*

**CBU-PWM4-LR**  
LMBA4969



**LED Star Strip 1500 IP67** 16.0 m  
**LED Star Strip 1900 IP67** 10.2 m

Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

\*Note: A 24V DC LED driver is required for operation.



# LED Star Strip 500 RGB Waterproof




### Product features:

- Long lifespan: **30.000h L70B10**
- Coloured light due to RGB LEDs
- Suitable for operation on **24V DC**

### Advantages:


- Long max. operable length without loss of luminous flux thanks to IC and high copper content in PCB
- High degree of protection thanks to high-quality silicone encapsulation: **IP67**
- Extra strong hold thanks to 3M adhesive tape



LED Star Strip 500 RGB Waterproof							mm	Pcs.	
1	RSTA2415	LED STRIP 500 S RGB/24V/IP67 5M	14.4	500	70		14.3	4	10

**Note:** For appropriate operation of the LED Strip, an aluminum profile is required for cooling.

Available lengths						
		mm	m	Article no.	Article no.	Article no.
1	LED STRIP 500 S RGB/24V/IP67	100	7	RSTA2415	RSTA2410	RSTA2411

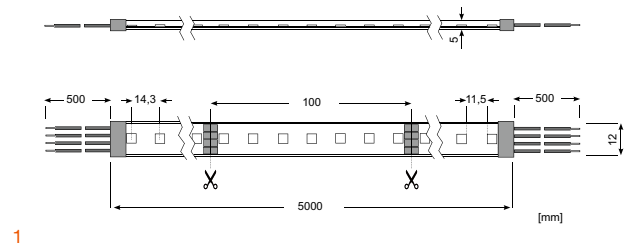

## Individual Cut


### SERVICE CUT STRIP

We would be happy to assemble our waterproof LED-Strips according to your specifications. The individual lengths are supplied with an IP67 cable on every one of both ends.

For more information on customizing, please refer to [page 11](#).


## Accessories for waterproof strips

(A corresponding number of end caps and accessories are included with the waterproof LED Strips)




## Profiles


**PROFILE SMALL U FLAT**  
17.3/9.6/B1C1 1M\*  
TRPA2511




**PROFILE SMALL U**  
17.3/16/B1C1 1M  
TRPA2501



**PROFILE SMALL WING**  
25/13/B1C1 1M  
TRPA2521




**PROFILE SMALL CORNER**  
22.8/22.8/B1C1 1M  
TRPA2531




## Covers


**COVER SMALL F**  
16.4/4/C1 1M  
ZTPA2571




**COVER SMALL SQUARE**  
17/9/C1 1M  
ZTPA3111




**PROFILE MEDIUM U FLAT**  
27/10.2/B2C2 1M\*  
TRPA2551




**PROFILE MEDIUM U**  
27/25.9/B2C2 1M  
TRPA2541




**PROFILE MEDIUM WING**  
40/25.9/B2C2 1M  
TRPA2561



**COVER MEDIUM F**  
26/5/C2 1M  
ZTPA2591



**COVER MEDIUM SQUARE**  
27/14/C2 1M  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

\*Only compatible with waterproof LED Strips without cover.

## LED Drivers

**Dimmable DALI**  
**DRIVER DALI 4CH 210W/24V**  
**IP67 OSRAM**  
OTDA2461



**LED Star Strip**  
**500 RGB IP67**



14.5 m

**Dimmable DALI/DMX**  
**DRIVER DALI/DMX 4CH 150W/24V**  
**IP20 RADIUM**  
OTDA4076



**LED Star Strip**  
**500 RGB IP67**



10.4 m

## LED Dimmer

**Light control Casambi (PWM4)\***  
**CBU-PWM4-LR**  
LMBA4969



**LED Star Strip**  
**500 RGB IP67**



10.0 m

Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

\*Note: A 24V DC LED driver is required for operation.

# LED Essence Strip 500 and 1000



## Product features:

- Very long lifespan: **50.000 h L70B50**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24 V DC**
- High colour consistency: **SDCM <3**
- Very high efficiency of up to **135 lm/W**
- Suitable for dry, protected environments



1



## LED Essence Strip 500

mm

Pcs.

1	RSTA3515	LED STRIP 500 E 927/24V 5M	3.6	446	80	●	12.5	E	2	10
1	RSTA3525	LED STRIP 500 E 930/24V 5M	3.6	454	80	●	12.5	E	2	10
1	RSTA3535	LED STRIP 500 E 940/24V 5M	3.6	485	80	○	12.5	E	2	10
1	RSTA3545	LED STRIP 500 E 965/24V 5M	3.6	475	80	●	12.5	E	2	10

## LED Essence Strip 1000

1	RSTA3555	LED STRIP 1000 E 927/24V 5M	8.0	960	80	●	12.5	E	2	10
1	RSTA3565	LED STRIP 1000 E 930/24V 5M	8.0	976	80	●	12.5	E	2	10
1	RSTA3575	LED STRIP 1000 E 940/24V 5M	8.0	1040	80	○	12.5	E	2	10
1	RSTA3585	LED STRIP 1000 E 965/24V 5M	8.0	1048	80	●	12.5	E	2	10




## Available lengths

mm

m

Article no.

1	LED STRIP 500 E 927/24V 5M	100	7.0	RSTA3515
1	LED STRIP 500 E 930/24V 5M	100	7.0	RSTA3525
1	LED STRIP 500 E 940/24V 5M	100	7.0	RSTA3535
1	LED STRIP 500 E 965/24V 5M	100	7.0	RSTA3545
1	LED STRIP 1000 E 927/24V 5M	100	5.5	RSTA3555
1	LED STRIP 1000 E 930/24V 5M	100	5.5	RSTA3565
1	LED STRIP 1000 E 940/24V 5M	100	5.5	RSTA3575
1	LED STRIP 1000 E 965/24V 5M	100	5.5	RSTA3585

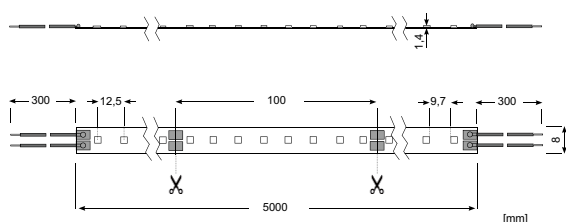

1

## Feed-in connector for LED Strips

**STRIP CON**  
2PIN 8MM/50CM  
FXZA4460



**STRIP CON SD**  
2PIN 8MM/SW  
FXZA2479



## Strip to strip connector

**STRIP CABLE BRIDGE CP**  
2PIN 8MM/5CM  
FXZA2477




**STRIP BRIDGE CP**  
2PIN 8MM  
FXZA2475




Please refer to [page 62](#) for further product information.

## Profiles


**PROFILE SMALL U FLAT**  
17.3/9.6/B1C1 1M  
TRPA2511




**PROFILE SMALL U**  
17.3/16/B1C1 1M  
TRPA2501



**PROFILE SMALL WING**  
25/13/B1C1 1M  
TRPA2521




**PROFILE SMALL CORNER**  
22.8/22.8/B1C1 1M  
TRPA2531




## Covers


**COVER SMALL F**  
16.4/4/C1 1M  
ZTPA2571




**COVER SMALL SQUARE**  
17/9/C1 1M  
ZTPA3111




**PROFILE MEDIUM U FLAT**  
27/10.2/B2C2 1M  
TRPA2551




**PROFILE MEDIUM U**  
27/25.9/B2C2 1M  
TRPA2541




**PROFILE MEDIUM WING**  
40/25.9/B2C2 1M  
TRPA2561



**COVER MEDIUM F**  
26/5/C2 1M  
ZTPA2591



**COVER MEDIUM SQUARE**  
27/14/C2 1M  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

## LED Drivers

**Not dimmable**

**DRIVER FLAT 36W/24V**  
IP20 RADIUM  
OTNA3102



**Dimmable Phasecut**

**DRIVER PHASECUT 36W/24V**  
IP20 RADIUM  
OTDA4077



**Dimmable DALI**

**DRIVER DALI 1CH 36W/24V**  
IP20 RADIUM  
OTDA4070



**Dimmable Casambi (Bluetooth)**

**DRIVER BT 1CH 60W/24V**  
IP20 TRIDONIC  
OTDA2444



**LED Essence Strip 500** 10.0 m  
**LED Essence Strip 1000** 4.5 m



**LED Essence Strip 500** 10.0 m  
**LED Essence Strip 1000** 4.5 m



**LED Essence Strip 500** 10.0 m  
**LED Essence Strip 1000** 4.5 m



**LED Essence Strip 500** 16.6 m  
**LED Essence Strip 1000** 7.5 m



Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.



# LED Essence Strip 1500



## Product features:

- Very long lifespan: **50.000 h L70B50**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24V DC**
- High colour consistency: **SDCM <3**
- Very high efficiency of up to **128 lm/W**
- Suitable for dry, protected environments



1




## LED Essence Strip 1500

							mm		Pcs.
1	RSTA3595	LED STRIP 1500 E 927/24V 5M	12.0	1440	80		12.5	E	2
1	RSTA3605	LED STRIP 1500 E 930/24V 5M	12.0	1452	80		12.5	E	2
1	RSTA3615	LED STRIP 1500 E 940/24V 5M	12.0	1536	80		12.5	E	2
1	RSTA3625	LED STRIP 1500 E 965/24V 5M	12.0	1524	80		12.5	E	2



## Available lengths

		mm	m	Article no.
1	LED STRIP 1500 E 927/24V 5M	100	5	RSTA3595
1	LED STRIP 1500 E 930/24V 5M	100	5	RSTA3605
1	LED STRIP 1500 E 940/24V 5M	100	5	RSTA3615
1	LED STRIP 1500 E 965/24V 5M	100	5	RSTA3625

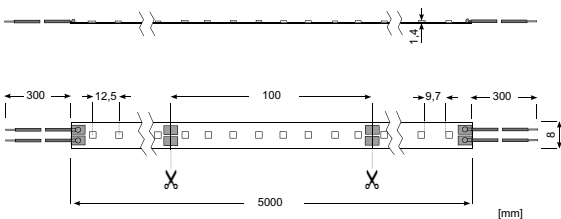

1

## Feed-in connector for LED Strips

**STRIP CON CP**  
2PIN 8MM/50CM  
FXZA2470



**STRIP CON SD**  
2PIN 8MM/SW  
FXZA2479



## Strip to strip connector

**STRIP CABLE BRIDGE CP**  
2PIN 8MM/5CM  
FXZA2477




**STRIP BRIDGE CP**  
2PIN 8MM  
FXZA2475




Please refer to [page 62](#) for further product information.

## Profiles


**PROFILE SMALL U FLAT**  
17.3/9.6/B1C1 1M  
TRPA2511




**PROFILE SMALL U**  
17.3/16/B1C1 1M  
TRPA2501



**PROFILE SMALL WING**  
25/13/B1C1 1M  
TRPA2521




**PROFILE SMALL CORNER**  
22.8/22.8/B1C1 1M  
TRPA2531




## Covers


**COVER SMALL F**  
16.4/4/C1 1M  
ZTPA2571




**COVER SMALL SQUARE**  
17/9/C1 1M  
ZTPA3111




**PROFILE MEDIUM U FLAT**  
27/10.2/B2C2 1M  
TRPA2551




**PROFILE MEDIUM U**  
27/25.9/B2C2 1M  
TRPA2541




**PROFILE MEDIUM WING**  
40/25.9/B2C2 1M  
TRPA2561



**COVER MEDIUM F**  
26/5/C2 1M  
ZTPA2591



**COVER MEDIUM SQUARE**  
27/14/C2 1M  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

## LED Drivers

**Not dimmable**

**DRIVER FLAT 60W/24V**  
IP20 RADIUM  
OTNA3103



**Dimmable Phasecut**

**DRIVER PHASECUT 75W/24V**  
IP20 RADIUM  
OTDA3026



**Dimmable DALI**

**DRIVER DALI 1CH 75W/24V**  
IP20 RADIUM  
OTDA4071



**Dimmable Casambi (Bluetooth)**

**DRIVER BT 1CH 60W/24V**  
IP20 TRIDONIC  
OTDA2444



**LED Essence Strip 1500**



5.0 m

**LED Essence Strip 1500**



6.2 m

**LED Essence Strip 1500**



6.2 m

**LED Essence Strip 1500**



5.0 m

Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

## LED Essence Strip 700 ZeroPitch



### Product features:

- Very long lifespan: **50.000 h L70B50**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24V DC**
- Wide beam angle: **160°**
- Suitable for dry, protected environments

### Advantages:

- Continuous light line
- Perfectly suited for use in super-flat profiles or for furniture installation
- Low glare compared to SMD LEDs



1



### LED Essence Strip 700 ZeroPitch

mm

Pcs.

1	RSTA3825	LED STRIP 700ZP E 927/24V 5M	8.0	630	280		-	G	2	10
1	RSTA3835	LED STRIP 700ZP E 930/24V 5M	8.0	640	280		-	G	2	10
1	RSTA3845	LED STRIP 700ZP E 940/24V 5M	8.0	660	280		-	G	2	10
1	RSTA3855	LED STRIP 700ZP E 965/24V 5M	8.0	680	280		-	G	2	10




### Available lengths

mm

m

Article no.

1	LED STRIP 700ZP E 927/24V 5M	25	5	RSTA3825
1	LED STRIP 700ZP E 930/24V 5M	25	5	RSTA3835
1	LED STRIP 700ZP E 940/24V 5M	25	5	RSTA3845
1	LED STRIP 700ZP E 965/24V 5M	25	5	RSTA3855

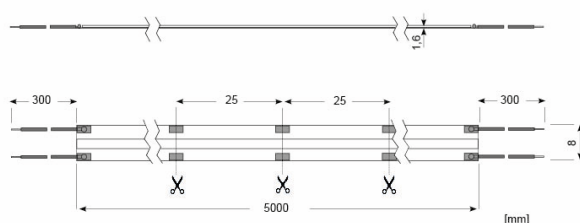

1

## Feed-in connector for LED Strips


**STRIP CON**  
**2PIN 8MM/50CM**  
**FXZA4460**




Please refer to [page 62](#) for further product information.

## Profiles


**PROFILE SMALL U FLAT**  
**17.3/9.6/B1C1 1M**  
**TRPA2511**




**PROFILE SMALL U**  
**17.3/16/B1C1 1M**  
**TRPA2501**



**PROFILE SMALL WING**  
**25/13/B1C1 1M**  
**TRPA2521**




**PROFILE SMALL CORNER**  
**22.8/22.8/B1C1 1M**  
**TRPA2531**




## Covers


**COVER SMALL F**  
**16.4/4/C1 1M**  
**ZTPA2571**




**COVER SMALL SQUARE**  
**17/9/C1 1M**  
**ZTPA3111**




**PROFILE MEDIUM U FLAT**  
**27/10.2/B2C2 1M**  
**TRPA2551**




**PROFILE MEDIUM U**  
**27/25.9/B2C2 1M**  
**TRPA2541**




**PROFILE MEDIUM WING**  
**40/25.9/B2C2 1M**  
**TRPA2561**



**COVER MEDIUM F**  
**26/5/C2 1M**  
**ZTPA2591**



**COVER MEDIUM SQUARE**  
**27/14/C2 1M**  
**ZTPA3121**



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

## LED Drivers

**Not dimmable**

**DRIVER FLAT 60W/24V**  
**IP20 RADIUM**  
**OTNA3103**



**LED Essence Strip**  
**700 ZeroPitch**



7.5 m

**Dimmable Phasecut**

**DRIVER PHASECUT 75W/24V**  
**IP20 RADIUM**  
**OTDA3026**



**LED Essence Strip**  
**700 ZeroPitch**



9.3 m

**Dimmable DALI**

**DRIVER DALI 1CH 75W/24V**  
**IP20 RADIUM**  
**OTDA4071**



**LED Essence Strip**  
**700 ZeroPitch**



9.3 m

**Dimmable Casambi (Bluetooth)**

**DRIVER BT 1CH 60W/24V**  
**IP20 TRIDONIC**  
**OTDA2444**



**LED Essence Strip**  
**700 ZeroPitch**



7.5 m

Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.



# LED Essence Strip 1000 RGBW and 2200 Tunable White



## Product features RGBW:

- Long lifespan: **30.000 h L70B50**
- Dynamic coloured light by RGB LEDs
- Suitable for operation on **24 V DC**
- Optimal function with multi-channel LED dimmers
- Suitable for dry, protected environments

## Product features TW:

- Long lifespan: **50.000 h L70B50**
- Very good colour rendering: **CRI >90**
- Variable colour temperature: **2700–6500 K**
- Suitable for operation on **24 V DC**
- High efficiency of up to **116 lm/W**
- Suitable for dry, protected environments



1



2



## LED Essence Strip 1000 RGBW

mm

Pcs.

1	RSTA3635	LED STRIP 1000 E RGBW/24V 5M	19.2	960	60		16.7	-	5	10
---	----------	------------------------------	------	-----	----	--	------	---	---	----

## LED Essence Strip 2200 Tunable White

mm

Pcs.

2	RSTA3645	LED STRIP 2200 E TW/24V 5M	19.2	2236	128		15.6	F	3	10
---	----------	----------------------------	------	------	-----	--	------	---	---	----

**Note:** For appropriate operation of the LED Strip, an aluminum profile is required for cooling.




## Available lengths

mm


m

Article no.

1	LED STRIP 1000 E RGBW/24V 5M	100	5	RSTA3635
2	LED STRIP 2200 E TW/24V 5M	125	5	RSTA3645

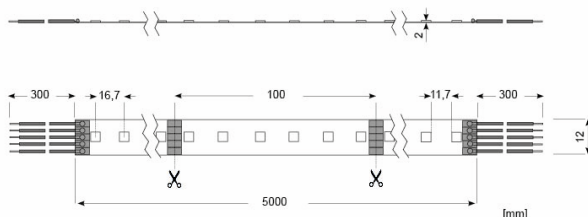


1

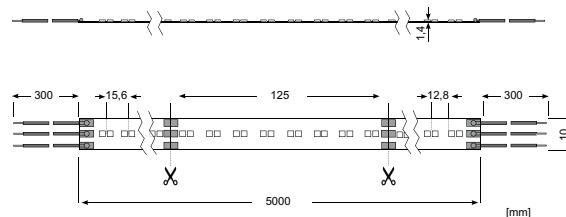

2

## Strip to strip connector

**STRIP CABLE BRIDGE**  
**5PIN 12MM/5CM 4PCS**  
**FXZA4511**




Please refer to [page 62](#) for further product information.


\*Note: Not compatible with LED Essence Strip 2200 TW. Accessory compatibility on [page 64-65](#).

## Profiles


**PROFILE SMALL U FLAT**  
**17.3/9.6/B1C1 1M**  
**TRPA2511**




**PROFILE SMALL U**  
**17.3/16/B1C1 1M**  
**TRPA2501**



**PROFILE SMALL WING**  
**25/13/B1C1 1M**  
**TRPA2521**




**PROFILE SMALL CORNER**  
**22.8/22.8/B1C1 1M**  
**TRPA2531**




## Covers


**COVER SMALL F**  
**16.4/4/C1 1M**  
**ZTPA2571**




**COVER SMALL SQUARE**  
**17/9/C1 1M**  
**ZTPA3111**




**PROFILE MEDIUM U FLAT**  
**27/10.2/B2C2 1M**  
**TRPA2551**




**PROFILE MEDIUM U**  
**27/25.9/B2C2 1M**  
**TRPA2541**




**PROFILE MEDIUM WING**  
**40/25.9/B2C2 1M**  
**TRPA2561**



**COVER MEDIUM F**  
**26/5/C2 1M**  
**ZTPA2591**



**COVER MEDIUM SQUARE**  
**27/14/C2 1M**  
**ZTPA3121**



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

## LED Drivers

**Dimmable DALI**  
**DRIVER DALI 2CH 150W/24V**  
**IP20 RADIUM**  
**OTDA4075**



**Dimmable DALI/DMX**  
**DRIVER DALI/DMX 4CH 150W/24V**  
**IP20 RADIUM**  
**OTDA4076**



## LED Dimmers

**Light control RF\***  
**DIMMER RF 4CH 480W/12-36V**  
**IP20**  
**LMRA3971**



**Light control Casambi (PWM4)\***  
**CBU-PWM4-LR**  
**LMBA4969**



**LED Essence Strip RGBW** 7.8 m  
**LED Essence Strip TW** 7.8 m

**LED Essence Strip RGBW** 7.8 m  
**LED Essence Strip TW** 7.8 m

**LED Essence Strip RGBW** 24.0 m  
**LED Essence Strip TW** 24.0 m

**LED Essence Strip RGBW** 7.5 m  
**LED Essence Strip TW** 7.5 m

Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

\*Note: A 24V DC LED driver is required for operation.

# LED Essence Strip 400 and 1000 Waterproof



## Product features:

- Very long lifespan: **50.000 h L70B50**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24 V DC**
- High colour consistency: **SDCM <3**
- High protection class thanks to silicone extrusion: **IP66**
- Connecting cable on both sides: **300 mm**



1



## LED Essence Strip 400 Waterproof

						mm			Pcs.
1	RSTA3655	LED STRIP 400 E 927/24V/IP66 5M	3.6	424	80	12.5	F	2	10
1	RSTA3665	LED STRIP 400 E 930/24V/IP66 5M	3.6	431	80	12.5	E	2	10
1	RSTA3675	LED STRIP 400 E 940/24V/IP66 5M	3.6	460	80	12.5	E	2	10
1	RSTA3685	LED STRIP 400 E 965/24V/IP66 5M	3.6	451	80	12.5	E	2	10


## LED Essence Strip 1000 Waterproof

1	RSTA3695	LED STRIP 1000 E 927/24V/IP66 5M	8.0	912	80	12.5	F	2	10
1	RSTA3705	LED STRIP 1000 E 930/24V/IP66 5M	8.0	927	80	12.5	F	2	10
1	RSTA3715	LED STRIP 1000 E 940/24V/IP66 5M	8.0	988	80	12.5	E	2	10
1	RSTA3725	LED STRIP 1000 E 965/24V/IP66 5M	8.0	996	80	12.5	E	2	10



## Available lengths

		mm	m	Article no.
1	LED STRIP 400 E 927/24V/IP66 5M	100	7.0	RSTA3655
1	LED STRIP 400 E 930/24V/IP66 5M	100	7.0	RSTA3665
1	LED STRIP 400 E 940/24V/IP66 5M	100	7.0	RSTA3675
1	LED STRIP 400 E 965/24V/IP66 5M	100	7.0	RSTA3685
1	LED STRIP 1000 E 927/24V/IP66 5M	100	5.5	RSTA3695
1	LED STRIP 1000 E 930/24V/IP66 5M	100	5.5	RSTA3705
1	LED STRIP 1000 E 940/24V/IP66 5M	100	5.5	RSTA3715
1	LED STRIP 1000 E 965/24V/IP66 5M	100	5.5	RSTA3725

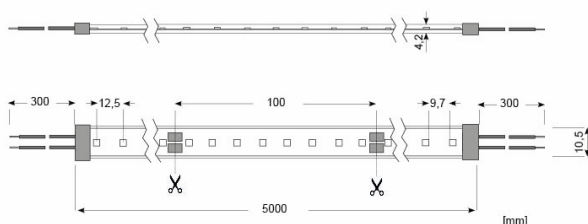

1

## Feed-in connector for LED Strips


**STRIP CON SD 2PIN**  
**8MM/50CM IP65**  
**FXZA2473**




Please refer to [page 62](#) for further product information.

## Profiles


**PROFILE SMALL U FLAT**  
**17.3/9.6/B1C1 1M\***  
**TRPA2511**




**PROFILE SMALL U**  
**17.3/16/B1C1 1M**  
**TRPA2501**



**PROFILE SMALL WING**  
**25/13/B1C1 1M**  
**TRPA2521**




**PROFILE SMALL CORNER**  
**22.8/22.8/B1C1 1M**  
**TRPA2531**




## Covers


**COVER SMALL F**  
**16.4/4/C1 1M**  
**ZTPA2571**




**COVER SMALL SQUARE**  
**17/9/C1 1M**  
**ZTPA3111**




**PROFILE MEDIUM U FLAT**  
**27/10.2/B2C2 1M\***  
**TRPA2551**




**PROFILE MEDIUM U**  
**27/25.9/B2C2 1M**  
**TRPA2541**




**PROFILE MEDIUM WING**  
**40/25.9/B2C2 1M**  
**TRPA2561**



**COVER MEDIUM F**  
**26/5/C2 1M**  
**ZTPA2591**



**COVER MEDIUM SQUARE**  
**27/14/C2 1M**  
**ZTPA3121**



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

\*Only compatible with waterproof LED Strips without cover.

## LED Drivers

**Not dimmable**  
**DRIVER 40W/24V**  
**IP66 OSRAM**  
**OTNA2420**



**Not dimmable**  
**DRIVER 75W/24V**  
**IP67 MeanWell**  
**OTDA2450**



**Dimmable 1-10V**  
**DRIVER 1-10V 40W/24V**  
**IP66 OSRAM**  
**OTDA2425**



**Dimmable DALI**  
**DRIVER DALI 4CH 100W/24V**  
**IP67 OSRAM**  
**OTDA4107**



**LED Essence Strip 400 IP66**  
**LED Essence Strip 800 IP66**

11.1 m  
 5.0 m

**LED Essence Strip 400 IP66**  
**LED Essence Strip 800 IP66**

20.8 m  
 9.3 m

**LED Essence Strip 400 IP66**  
**LED Essence Strip 800 IP66**

11.1 m  
 5.0 m

**LED Essence Strip 400 IP66**  
**LED Essence Strip 800 IP66**

27.7 m  
 12.5 m

Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.



# LED Essence Strip 1400 Waterproof



**Product features:**

- Very long lifespan: **50.000 h L70B50**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24 V DC**
- High colour consistency: **SDCM <3**
- High protection class thanks to silicone extrusion: **IP66**
- Connecting cable on both sides: **300 mm**



1




## LED Essence Strip 1400 Waterproof

						mm			Pcs.
1	RSTA3735	LED STRIP 1400 E 927/24V/IP66 5M	12.0	1368	80	●	12.5	F	10
1	RSTA3745	LED STRIP 1400 E 930/24V/IP66 5M	12.0	1379	80	●	12.5	F	10
1	RSTA3755	LED STRIP 1400 E 940/24V/IP66 5M	12.0	1459	80	○	12.5	E	10
1	RSTA3765	LED STRIP 1400 E 965/24V/IP66 5M	12.0	1448	80	●	12.5	E	10



## Available lengths

		mm	m	Article no.
1	LED STRIP 1400 E 927/24V/IP66 5M	100	5	RSTA3735
1	LED STRIP 1400 E 930/24V/IP66 5M	100	5	RSTA3745
1	LED STRIP 1400 E 940/24V/IP66 5M	100	5	RSTA3755
1	LED STRIP 1400 E 965/24V/IP66 5M	100	5	RSTA3765

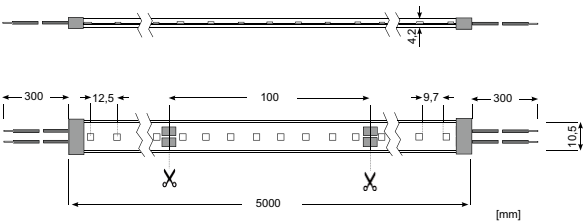

1

## Feed-in connector for LED Strips


**STRIP CON SD 2PIN**  
**8MM/50CM IP65**  
**FXZA2473**




Please refer to [page 62](#) for further product information.

## Profiles


**PROFILE SMALL U FLAT**  
**17.3/9.6/B1C1 1M\***  
**TRPA2511**




**PROFILE SMALL U**  
**17.3/16/B1C1 1M**  
**TRPA2501**



**PROFILE SMALL WING**  
**25/13/B1C1 1M**  
**TRPA2521**




**PROFILE SMALL CORNER**  
**22.8/22.8/B1C1 1M**  
**TRPA2531**




## Covers


**COVER SMALL F**  
**16.4/4/C1 1M**  
**ZTPA2571**




**COVER SMALL SQUARE**  
**17/9/C1 1M**  
**ZTPA3111**




**PROFILE MEDIUM U FLAT**  
**27/10.2/B2C2 1M\***  
**TRPA2551**




**PROFILE MEDIUM U**  
**27/25.9/B2C2 1M**  
**TRPA2541**




**PROFILE MEDIUM WING**  
**40/25.9/B2C2 1M**  
**TRPA2561**



**COVER MEDIUM F**  
**26/5/C2 1M**  
**ZTPA2591**



**COVER MEDIUM SQUARE**  
**27/14/C2 1M**  
**ZTPA3121**



Please find further profiles, covers and accessories as well as product information on [page 62 ff.](#)

\*Only compatible with waterproof LED Strips without cover.

## LED Drivers

**Not dimmable**  
**DRIVER 75W/24V**  
**IP67 MeanWell**  
**OTDA2450**



**Dimmable 1-10V**  
**DRIVER 1-10V 60W/24V**  
**IP66 OSRAM**  
**OTDA2426**



**Dimmable DALI**  
**DRIVER DALI 4CH 100W/24V**  
**IP67 OSRAM**  
**OTDA4107**



## LED Dimmer

**Light control Casambi (PWM4)\***  
**CBU-PWM4-LR**  
**LMBA4969**



**LED Essence Strip 1400 IP66**



6.2 m

**LED Essence Strip 1400 IP66**



5.0 m

**LED Essence Strip 1400 IP66**



8.3 m

**LED Essence Strip 1400 IP66**



12.0 m

Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

\*Note: A 24V DC LED driver is required for operation.

# LED Essence Strip 500 RGBW Waterproof



**Product features:**

- Long lifespan: **30.000 h L70B50**
- Dynamic coloured light by RGB LEDs
- Suitable for operation on **24 V DC**
- High protection thanks to silicone extrusion: **IP66**
- Connecting cable on both sides: **300 mm**



1




LED Essence Strip 500 RGBW Waterproof								mm	Pcs.
1	RSTA3775	LED STRIP 900 E RGBW/24V/IP66 5M	19.2	912	60		16.7	5	10

**Note:** For appropriate operation of the LED Strip, an aluminum profile is required for cooling.



Available lengths			mm	m	Article no.
1	LED STRIP 900 E RGBW/24V/IP66 5M		100	5	RSTA3775

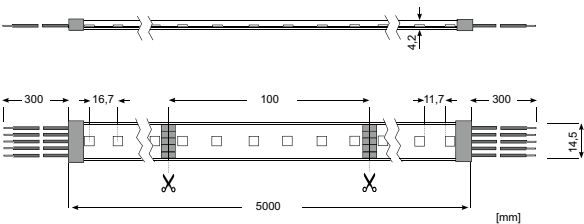

1


## Feed-in cables pre-assembled on both sides

Our waterproof LED Essence RGBW Strip, like all LED Strips from our Essence portfolio, is provided with a 0.3 m connection cable on each side.


## Profiles

The anodised MEDIUM aluminium profiles offer a high-quality design and optimum protection for the waterproof LED Essence Strip RGBW. Benefit from a large light emission area – especially in combination with our SQUARE cover.


**PROFILE MEDIUM U FLAT**  
27/10.2/B2C2 1M\*  
TRPA2551



**PROFILE MEDIUM U**  
27/25.9/B2C2 1M  
TRPA2541




**PROFILE MEDIUM WING**  
40/25.9/B2C2 1M  
TRPA2561




## Covers

**COVER MEDIUM F**  
26/5/C2 1M  
ZTPA2591



**COVER MEDIUM SQUARE**  
27/14/C2 1M  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

\*Only compatible with waterproof LED Strips without cover.

## LED Drivers

**Dimmable DALI**  
**DRIVER DALI 4CH 210W/24V**  
IP67 OSRAM  
OTDA2461



**LED Essence Strip**  
**500 RGBW IP66**



10.9 m

**Dimmable DALI**  
**DRIVER DALI 4CH 100W/24V**  
IP67 OSRAM  
OTDA4107



**LED Essence Strip**  
**500 RGBW IP66**



5.2 m

**Dimmable DALI/DMX**  
**DRIVER DALI/DMX 4CH 150W/24V**  
IP20 RADIUM  
OTDA4076



**LED Essence Strip**  
**500 RGBW IP66**



7.8 m

## LED Dimmer

**Light control Casambi (PWM4)\***  
**CBU-PWM4-LR**  
LMBA4969



**LED Essence Strip**  
**500 RGBW IP66**



7.5 m

Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

\*Note: A 24V DC LED driver is required for operation.




# LED Strip 500 and 1000 Easy Connect



## Product features:


- Long lifespan: **50.000 h L70B50**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24V DC**
- Very high efficiency of up to **155 lm/W**
- Homogeneous light with **480 LEDs per meter**
- Long max. operable length without loss of luminous flux thanks to IC and high copper content in PCB
- No soldering necessary as LED strips are equipped with connection cables including plug connectors
- Suitable for dry, protected environments



1



2



## LED Strip 500

mm

Pcs.

1	RSTA4231	LED STRIP 500ZP EH 927/24V 1M	5	455	320	●	-	G	2	16
1	RSTA4241	LED STRIP 500ZP EH 940/24V 1M	5	505	320	○	-	F	2	16
2	RSTA4230	LED STRIP 500 EH 927/24V 10M	4	490	80	●	12.5	E	2	9
2	RSTA4240	LED STRIP 500 EH 940/24V 10M	4	520	80	○	12.5	E	2	9

## LED Strip 1000

1	RSTA4251	LED STRIP 1000ZP EH 927/24V 1M	10	890	480	●	-	G	2	16
1	RSTA4261	LED STRIP 1000ZP EH 940/24V 1M	10	1000	480	○	-	F	2	16
2	RSTA4250	LED STRIP 1000 EH 927/24V 10M	7	945	80	●	12.5	E	2	9
2	RSTA4260	LED STRIP 1000 EH 940/24V 10M	7	1085	80	○	12.5	D	2	9



Max



## Available lengths

mm

m


Article no.

Article no.


Article no.

Article no.

1	LED STRIP 500ZP EH 927/24V	50	5	RSTA4231	RSTA4233	RSTA4235	-
1	LED STRIP 500ZP EH 940/24V	50	5	RSTA4241	RSTA4243	RSTA4245	-
2	LED STRIP 500 EH 927/24V	100	10	-	-	-	RSTA4230
2	LED STRIP 500 EH 940/24V	100	10	-	-	-	RSTA4240
1	LED STRIP 1000ZP EH 927/24V	50	5	RSTA4251	RSTA4253	RSTA4255	-
1	LED STRIP 1000ZP EH 940/24V	50	5	RSTA4261	RSTA4263	RSTA4265	-
2	LED STRIP 1000 EH 927/24V	100	10	-	-	-	RSTA4250
2	LED STRIP 1000 EH 940/24V	100	10	-	-	-	RSTA4260

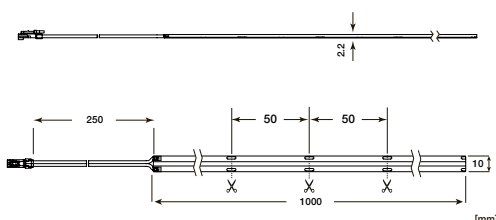

1

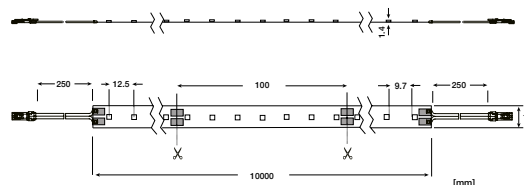


2

Note: 5m and 10m reels are equipped with connection cables including plug connectors on both sides.

## Strip distributor

**POWER DISTRIBUTOR**  
**6PORT P2 IP20**  
FXZA4950



## Cable extension

**CABLE EXTENSION**  
**2PIN 2M**  
FXZA4380



## Strip-to-strip connector


**STRIP CABLE BRIDGE 2PIN**  
**10MM/5CM 4PCS**  
FXZA4510




Please refer to [page 62](#) for further product information.

## Profiles


**PROFILE SMALL U FLAT**  
**17.3/9.6/B1C1 1M\***  
TRPA2511




**PROFILE SMALL U**  
**17.3/16/B1C1 1M**  
TRPA2501



**PROFILE SMALL WING**  
**25/13/B1C1 1M**  
TRPA2521




**PROFILE SMALL CORNER**  
**22.8/22.8/B1C1 1M**  
TRPA2531




## Covers


**COVER SMALL F**  
**16.4/4/C1 1M**  
ZTPA2571




**COVER SMALL SQUARE**  
**17/9/C1 1M**  
ZTPA3111




**PROFILE MEDIUM U FLAT**  
**27/10.2/B2C2 1M\***  
TRPA2551




**PROFILE MEDIUM U**  
**27/25.9/B2C2 1M**  
TRPA2541




**PROFILE MEDIUM WING**  
**40/25.9/B2C2 1M**  
TRPA2561



**COVER MEDIUM F**  
**26/5/C2 1M**  
ZTPA2591



**COVER MEDIUM SQUARE**  
**27/14/C2 1M**  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

## LED Drivers

**Not dimmable**  
**DRIVER 30W DC 24V**  
OTNA4372



**LED STRIP 500ZP EH 1M** 6 m  
**LED STRIP 1000ZP EH 1M** 3 m

**Not dimmable**  
**DRIVER 60W DC 24V**  
OTNA4373



**LED STRIP 500ZP EH 1M** 12 m  
**LED STRIP 1000ZP EH 1M** 6 m

## LED Dimmer

**Light control Zigbee\***  
**CONTROLLER ZGB WHITE**  
**84W/24V IP20**  
LMZA4376



**LED STRIP 500ZP EH 1M** 16.8 m  
**LED STRIP 1000ZP EH 1M** 8.4 m

Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

\*Note: A 24V DC LED driver is required for operation.

# LED Strip 1500 Easy Connect



## Product features:

- Very long lifespan: **50.000 h L80B50**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24V DC**
- Very high efficiency of up to **139 lm/W**
- Homogeneous light with **128 LEDs per meter**
- No soldering necessary as LED strips are equipped with connection cables including plug connectors
- Suitable for dry, protected environments



1




## LED Strip 1500

						mm			Pcs.
1	RSTA4271	LED STRIP 1500 EH 927/24V 1M	12	1440	128	●	7.8	G	16
1	RSTA4281	LED STRIP 1500 EH 940/24V 1M	12	1668	128	○	7.8	F	16



## Available lengths

		mm	m	Article no.	Article no.	Article no.	Article no.
1	LED STRIP 1500 EH 927/24V	50	5	RSTA4271	RSTA4273	RSTA4275	-
1	LED STRIP 1500 EH 940/24V	50	5	RSTA4281	RSTA4283	RSTA4285	-

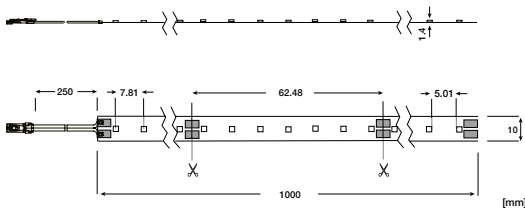

1

Note: 5m reels are equipped with connection cables including plug connectors on both sides.

## Strip distributor

**POWER DISTRIBUTOR**  
**6PORT P2 IP20**  
FXZA4950



## Cable extension

**CABLE EXTENSION**  
**2PIN 2M**  
FXZA4380



## Strip-to-strip connector


**STRIP CABLE BRIDGE 2PIN**  
**10MM/5CM 4PCS**  
FXZA4510




Please refer to [page 62](#) for further product information.

## Profiles


**PROFILE SMALL U FLAT**  
**17.3/9.6/B1C1 1M\***  
TRPA2511




**PROFILE SMALL U**  
**17.3/16/B1C1 1M**  
TRPA2501



**PROFILE SMALL WING**  
**25/13/B1C1 1M**  
TRPA2521




**PROFILE SMALL CORNER**  
**22.8/22.8/B1C1 1M**  
TRPA2531




## Covers


**COVER SMALL F**  
**16.4/4/C1 1M**  
ZTPA2571




**COVER SMALL SQUARE**  
**17/9/C1 1M**  
ZTPA3111




**PROFILE MEDIUM U FLAT**  
**27/10.2/B2C2 1M\***  
TRPA2551




**PROFILE MEDIUM U**  
**27/25.9/B2C2 1M**  
TRPA2541




**PROFILE MEDIUM WING**  
**40/25.9/B2C2 1M**  
TRPA2561



**COVER MEDIUM F**  
**26/5/C2 1M**  
ZTPA2591



**COVER MEDIUM SQUARE**  
**27/14/C2 1M**  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

## LED Drivers

**Not dimmable**  
**DRIVER 30W DC 24V**  
OTNA4372



**Not dimmable**  
**DRIVER 60W DC 24V**  
OTNA4373



## LED Dimmer

**Light control Zigbee\***  
**CONTROLLER ZGB WHITE**  
**84W/24V IP20**  
LMZA4376



**LED STRIP 1500ZP EH**



2.5 m

**LED STRIP 1500ZP EH**



5 m

**LED STRIP 1500ZP EH**



7 m

Please refer to [page 96 ff.](#) for further information on control gears, dimmers and accessories.

Please refer to [page 104 ff.](#) for further information on control units.

\*Note: A 24V DC LED driver is required for operation.

# LED Strip 900WD and 500 RGBWW Easy Connect



## Product features:

- Very long lifespan: **50.000 h L80B50 L70B50 (RGBWW)**
- Very good colour rendering: **CRI >90**
- Suitable for operation on **24V DC**
- Variable color temperature: 1900-3000 K (WD)
- Dynamic colored light thanks to RGB LEDs (RGBWW)
- Homogeneous light with **784 LEDs per meter**
- Long max. operable length without loss of luminous flux thanks to IC and high copper content in PCB
- No soldering necessary as LED strips are equipped with connection cables including plug connectors
- Suitable for dry, protected environments



## LED Strip 900 WD

						mm		Pcs.	
1	RSTA4291	LED STRIP 900WD EH 930-919/24V 1M	10	910	168		11.9	G	2 16




## LED Strip 500 RGBWW

2	RSTA4311	LED STRIP 500ZP EH RGBWW/24V 1M	10	500	784		-	G	5 16
3	RSTA4310	LED STRIP 500 EH RGBWW/24V 10M	10	424	60		16.7	G	5 16



## Available lengths

		mm	m	Article no.	Article no.	Article no.	Article no.
1	LED STRIP 900WD 930-919/24V	83.3	5	RSTA4291	RSTA4293	RSTA4295	-
2	LED STRIP 500ZP RGBWW/24V	71.4	5	RSTA4311	RSTA4313	RSTA4315	-
3	LED STRIP 500 RGBWW/24V	100	10	-	-	-	RSTA4310

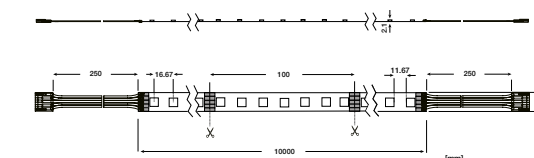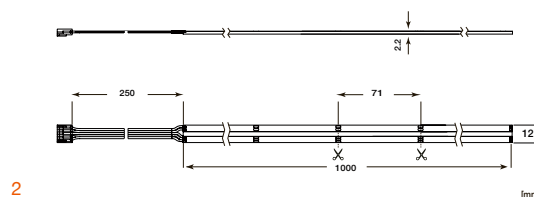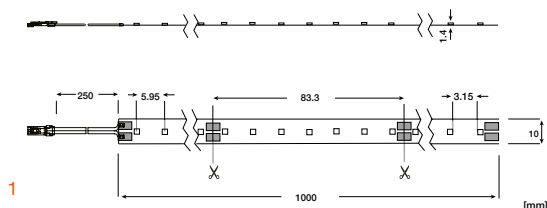

Note: 5m and 10m reels are equipped with connection cables including plug connectors on both sides.



## Strip distributor

**POWER DISTRIBUTOR**  
**6PORT P2 IP20**  
FXZA4950  
WD



**POWER DISTRIBUTOR**  
**4PORT P2 IP20 RGBWW**  
FXZA4951  
RGBWW



## Cable extension

**CABLE EXTENSION**  
**2PIN 2M**  
FXZA4380  
WD




**CABLE EXTENSION**  
**RGBW 2M**  
FXZA4382  
RGBWW



## Strip-to-strip connector

**STRIP CABLE BRIDGE**  
**2PIN 10MM/5CM 4PCS**  
FXZA4510  
WD




**STRIP CABLE BRIDGE**  
**5PIN 10MM/5CM 4PCS**  
FXZA4511  
RGBWW




Please refer to [page 62](#) for further product information.

## Profiles


**PROFILE SMALL U FLAT**  
**17.3/9.6/B1C1 1M\***  
TRPA2511




**PROFILE SMALL U**  
**17.3/16/B1C1 1M**  
TRPA2501



**PROFILE SMALL WING**  
**25/13/B1C1 1M**  
TRPA2521




**PROFILE SMALL CORNER**  
**22.8/22.8/B1C1 1M**  
TRPA2531




## Covers


**COVER SMALL F**  
**16.4/4/C1 1M**  
ZTPA2571




**COVER SMALL SQUARE**  
**17/9/C1 1M**  
ZTPA3111




**PROFILE MEDIUM U FLAT**  
**27/10.2/B2C2 1M\***  
TRPA2551




**PROFILE MEDIUM U**  
**27/25.9/B2C2 1M**  
TRPA2541




**PROFILE MEDIUM WING**  
**40/25.9/B2C2 1M**  
TRPA2561



**COVER MEDIUM F**  
**26/5/C2 1M**  
ZTPA2591



**COVER MEDIUM SQUARE**  
**27/14/C2 1M**  
ZTPA3121



Please find further profiles, covers and accessories as well as product information on [page 66 ff.](#)

## LED Drivers

**Not dimmable**  
**DRIVER 30W DC 24V**  
OTNA4372



**Not dimmable**  
**DRIVER 60W DC 24V**  
OTNA4373



Max

Max

**LED STRIP 900WD EH** 3 m  
**LED STRIP 500 EH RGBWW\*** 3 m

**LED STRIP 900WD EH** 6 m  
**LED STRIP 500 EH RGBWW\*** 6 m

## LED Dimmer

**Light control Zigbee\*\***  
**CONTROLLER ZGB WHITE**  
**84W/24V IP20**  
LMZA4376



Max

**LED STRIP 900WD EH** 8.4 m

**Light control Zigbee\*\***  
**CONTROLLER ZGB RGBW**  
**84W/24V IP20**  
LMZA4377



Max

**LED STRIP 500 EH RGBWW** 8.4 m

Further product information on ballasts, dimmers and accessories can be found from [page 96](#) onwards.

Further product information on control units can be found from [page 104](#) onwards.

\*Note: An RGBW controller is required for operation.

\*\*Note: A 24V DC LED driver is required for operation.

## Accessories for LED Strips



### Feed-in connectors for LED Strips

#### Star and Essence

1	FXZA2470	STRIP CON CP 2PIN 8MM/50CM	2	8	500	IP00	5
2	FXZA2471	STRIP CON CP 4PIN 10MM/50CM	4	10	500	IP00	5
3	FXZA2479	STRIP CON SD 2PIN 8MM/SW*	2	8	-	IP00	5
4	FXZA2473	STRIP CON SD 2PIN 8MM/50CM IP65	2	8	500	IP65	5
5	FXZA4460	STRIP CON 2PIN 8MM/50CM	2	8	500	IP00	5
5	FXZA4461	STRIP CON 2PIN 10MM/50CM	2	10	500	IP00	5

\*Note: Cable not included. For use with your own cable (0.3–0.5 mm<sup>2</sup>).



### Strip to strip connectors

#### Star and Essence

1	FXZA2477	STRIP CABLE BRIDGE CP 2PIN 8MM/5CM	2	8	50	IP00	5
2	FXZA2478	STRIP CABLE BRIDGE CP 4PIN 10MM/5CM	4	10	50	IP00	5
3	FXZA4510	STRIP CABLE BRIDGE 2PIN 10MM/5CM 4PCS	2	10	50	IP00	10
4	FXZA4511	STRIP CABLE BRIDGE 5PIN 12MM/5CM 4PCS	5	12	50	IP00	10
5	FXZA2475	STRIP BRIDGE CP 2PIN 8MM	2	8	-	IP00	5
6	FXZA2476	STRIP BRIDGE CP 4PIN 10MM	4	10	-	IP00	5

#### Easy Connect

3	FXZA4510	STRIP CABLE BRIDGE 2PIN 10MM/5CM 4PCS	2	10	50	IP00	10
4	FXZA4511	STRIP CABLE BRIDGE 5PIN 12MM/5CM 4PCS	5	12	50	IP00	10

Accessories for LED Strips



LED Strip cables

Star and Essence

FXZA4120	RIBBON CABLE 2x0.32mm² IND		2	0.32
FXZA4122	RIBBON CABLE 2x0.82mm² IND		2	0.82
FXZA4123	RIBBON CABLE 3x0.32mm² IND		3	0.32
FXZA4124	RIBBON CABLE 4x0.32mm² IND		4	0.32
FXZA4125	RIBBON CABLE 5x0.32mm² IND		5	0.32
FXZA4126	SHEATHED CABLE 2x0.32mm² IND		2	0.32
FXZA4127	SHEATHED CABLE 2x0.52mm² IND		2	0.52
FXZA4128	SHEATHED CABLE 2x0.82mm² IND		2	0.82

Easy Connect

1 FXZA4380	CABLE EXTENSION 2PIN 2M		2	0.52
2 FXZA4382	CABLE EXTENSION RGBW 2M		5	0.32



LED Strip connector systems


Star and Essence

1 FXZA3995	CABLE PLUG 2PIN P1 IP20	9	0.55	36		2	1	IP20
2 FXZA3996	POWER DISTRIBUTOR 2PORT P1 IP20	6	-	36		2	2	IP20
3 FXZA3997	POWER DISTRIBUTOR 4PORT P1 IP20	6	-	36		2	4	IP20
4 FXZA3998	CABLE BRIDGE T-SHAPE 2PIN IP20	9	0.55	300		2	3	IP20
5 FXZA3999	CABLE BRIDGE I-SHAPE 2PIN IP20	9	0.55	300		2	2	IP20

Easy Connect

6 FXZA4950	POWER DISTRIBUTOR 6PORT P2 IP20 WHITE	6	-	36		2	6	IP20
7 FXZA4951	POWER DISTRIBUTOR 4PORT P3 IP20 RGBW	6	-	36		2	4	IP20

Wiring diagram: POWER DISTRIBUTOR 4PORT

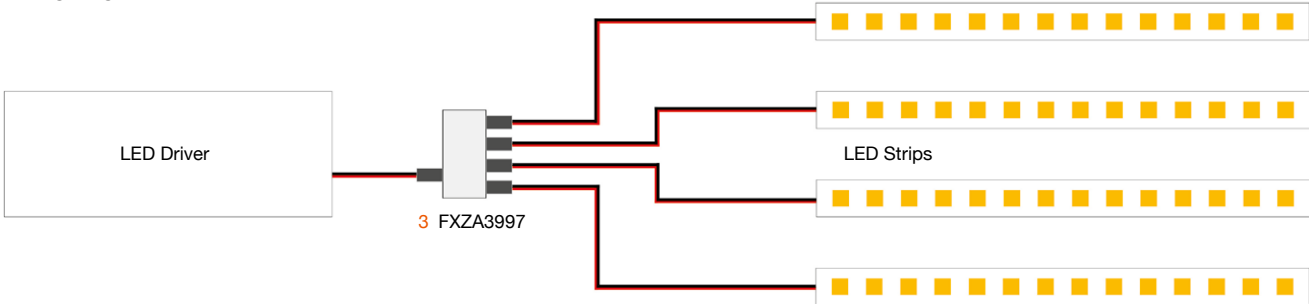







## Compatibility of Accessories

[illegible]

# Compatibility of Accessories

## Product family

Page


	LED Star Strip Tunable White	LED Star Strip RGB	LED Star Strip RGBW	LED Star Strip RGB Waterproof	LED Essence Strip RGBW	LED Essence Strip Tunable White	LED Essence Strip RGBW Waterproof	LED Strip 500 RGBWW Easy Connect
	30	34	34	40	48	48	54	60
<b>STRIP CON CP 4PIN 10MM/50CM</b> FXZA2471 		x						
<b>STRIP CABLE BRIDGE CP 4PIN 10MM/5CM</b> FXZA2478 		x						
<b>STRIP CABLE BRIDGE 5PIN 12MM/5CM 4PCS</b> FXZA4511 			x		x			x
<b>STRIP BRIDGE CP 4PIN 10MM</b> FXZA2476 		x						
<b>POWER DISTRIBUTOR 4PORT P3 IP20</b> FXZA4951 								x
<b>CABLE EXTENSION RGBW 2M</b> FXZA4382 								x




Products.

## Profiles and Covers.


For the installation of our flexible LED Strips, we offer you a variable and versatile range of accessories for every installation situation. Our high-class aluminum profiles with fitting covers and the necessary mounting accessories provide a perfectly coordinated system of high quality. You will find the ideal combination for a lot of different requirements to develop timeless, efficient and reliable lighting systems in our portfolio.

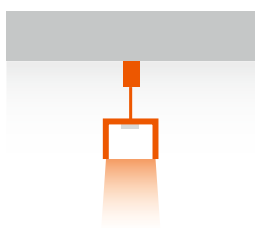


Suspended  
luminaires

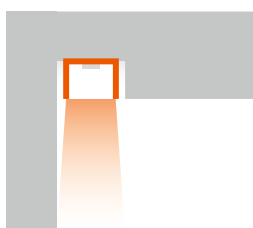

Wall cove  
Stairs lighting

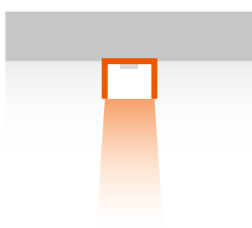

Ceiling and wall  
mounting

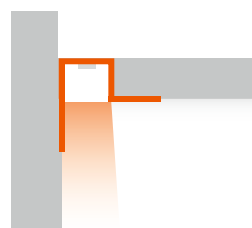

Built-in lights




Backlighting

# Content

Profile sets Easy Connect	68
Profiles SMALL	76
Profiles MEDIUM	84
Accessories	90
Compatibility of Accessories	94

<u>PROFILE</u>	<u>SMALL</u>	<u>CORNER</u>	<u>14.3</u>	/	<u>13.3</u>	/	<u>B1</u>	<u>C1</u>	<u>2M</u>
Product category	Provides information about the width of the profile:		Profile width in millimetres (mm)		Profile height in millimetres (mm)		Profile length in meters (m):		
	- 17-25 mm (SMALL)						- 1M		
	- 27-40 mm (MEDIUM)						- 2M		
							- 3M		
							- 5M		
	Name for the respective shape of the profile:						Interface		
	- Attachment / mounting profile (U)						Profile → bracket:		
	- Flat attachment / mounting profile (U FLAT)						- B1		
	- Installation profile (WING)						- B2		
	- Corner profile (CORNER)						Interface		
							Profile → cover:		
							- C1		
							- C2		

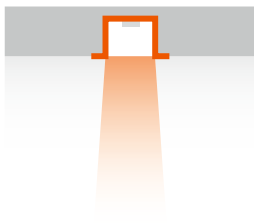


Ceiling and furniture installation




Sublighting under surface



Wall cove  
Cabinet lighting /  
Showcase lighting

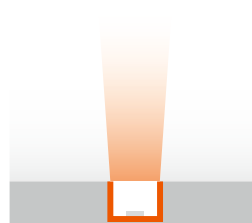

Floor lighting



Slat lighting

## SET SMALL U Easy Connect

### Product features:

- High quality anodized aluminum profile with almost rimless light emission surface
- Extra thick base for the use of countersunk screws and for optimal heat dissipation
- Versatile installation options
- Simple and timeless design
- Optimal cooling and protection for LED Strips
- The profile set includes profile, cover, end caps and brackets incl. screws



### Mounting:


- Installation with mounting brackets
- Installation by screwing
- Wire suspension (see accessories [page 90](#))



1





2



### Attachment profile sets



Attachment profile sets			Profile / cover	Shape of the cover	l (mm)	w (mm)	h (mm)	b <sub>install</sub> (mm)	Pcs.
 									
1	FXZA4550	SET SMALL U F 17/16 GREY 1M	●/○	Standard	1000	17.3	16.0	-	1
1	FXZA4551	SET SMALL U F 17/16 GREY 2M	●/○	Standard	2000	17.3	16.0	-	1
2	FXZA4552	SET SMALL U F 17/16 BLACK 1M	●/○	Standard	1000	17.3	16.0	-	1
2	FXZA4553	SET SMALL U F 17/16 BLACK 2M	●/○	Standard	2000	17.3	16.0	-	1



### Available lengths

	Article no.	Article no.
1 <b>SET SMALL U F 17/16 GREY</b>	FXZA4550	FXZA4551
2 <b>SET SMALL U F 17/16 BLACK</b>	FXZA4552	FXZA4553

# SET SMALL U FLAT and SET SMALL U FLAT SQUARE Easy Connect



## Product features:

- High quality anodized aluminum profile with almost rimless light emission surface
- Extra thick base for the use of countersunk screws and for optimal heat dissipation
- Versatile installation options
- Simple and timeless design
- Optimal cooling and protection for LED Strips
- The profile set includes profile, cover, end caps and brackets incl. screws



## Mounting:

- Installation with mounting brackets
- Installation by screwing
- Wire suspension (see accessories [page 90](#))

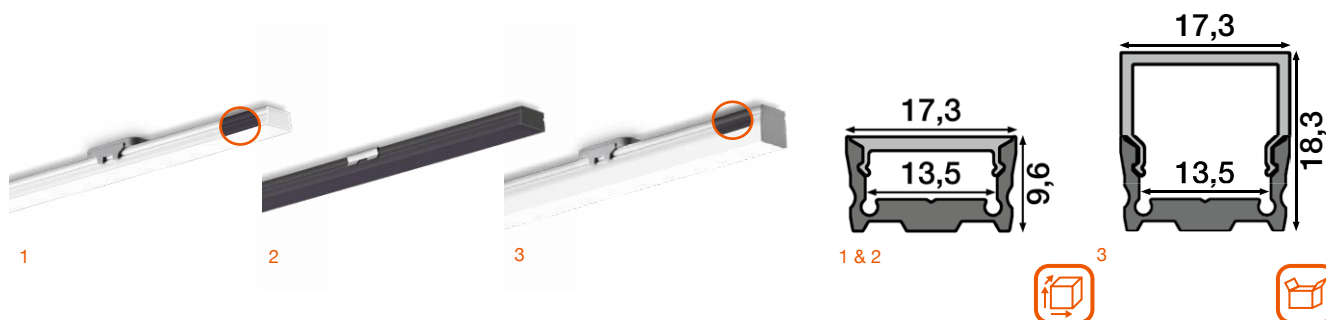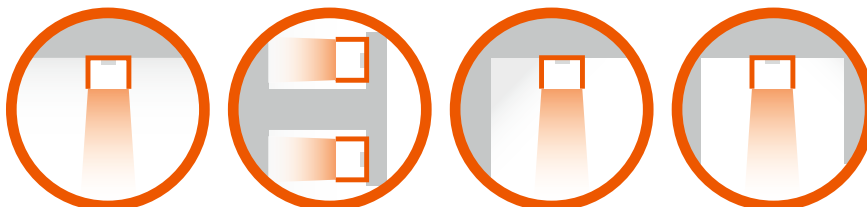

## Attachment profile sets

Profile / cover      Shape of the cover      l (mm)      w (mm)      h (mm)      b<sub>install</sub>(mm)      Pcs.



1	FXZA4540	SET SMALL U FLAT F 17/10 GREY 1M	●/○	Standard	1000	17.3	9.6	-	1
1	FXZA4541	SET SMALL U FLAT F 17/10 GREY 2M	●/○	Standard	2000	17.3	9.6	-	1
1	FXZA4544	SET SMALL U FLAT F 17/10 BLACK 1M	●/○	Standard	1000	17.3	9.6	-	1
1	FXZA4545	SET SMALL U FLAT F 17/10 BLACK 2M	●/○	Standard	2000	17.3	9.6	-	1
2	FXZA4548	SET SMALL U FLAT BLACK 17/10 BLACK 1M	●/●	Standard	1000	17.3	9.6	-	1
2	FXZA4549	SET SMALL U FLAT BLACK 17/10 BLACK 2M	●/●	Standard	2000	17.3	9.6	-	1
3	FXZA4542	SET SMALL U FLAT SQUARE 17/18 GREY 1M	●/○	High	1000	17.3	18.3	-	1
3	FXZA4543	SET SMALL U FLAT SQUARE 17/18 GREY 2M	●/○	High	2000	17.3	18.3	-	1
3	FXZA4546	SET SMALL U FLAT SQUARE 17/18 BLACK 1M	●/○	High	1000	17.3	18.3	-	1
3	FXZA4547	SET SMALL U FLAT SQUARE 17/18 BLACK 2M	●/○	High	2000	17.3	18.3	-	1



## Available lengths

Article no.

Article no.

1	SET SMALL U FLAT F 17/10 GREY	FXZA4540	FXZA4541
1	SET SMALL U FLAT F 17/10 BLACK	FXZA4544	FXZA4545
2	SET SMALL U FLAT BLACK 17/10 BLACK	FXZA4548	FXZA4549
3	SET SMALL U FLAT SQUARE 17/18 GREY	FXZA4542	FXZA4543
3	SET SMALL U FLAT SQUARE 17/18 BLACK	FXZA4546	FXZA4547



## SET SMALL CORNER Easy Connect


### Product features:

- High quality anodized aluminum profile
- Extra thick base for the use of countersunk screws and for optimal heat dissipation
- Versatile installation options
- Simple and timeless design
- Optimal cooling and protection for LED Strips
- The profile set includes profile, cover, end caps, and brackets incl. screws




### Mounting:

- Installation with mounting brackets
- Installation by screwing

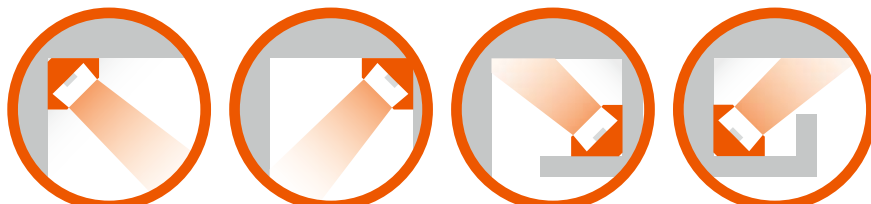

1



### Corner profile sets

Profile / cover      Shape of the cover      l (mm)      w (mm)      h (mm)      b<sub>install</sub>(mm)      Pcs.



1	FXZA4554	<b>SET SMALL CORNER F 23/23 GREY 1M</b>	●/○	Standard	1000	22.8	22.8	-	1
1	FXZA4555	<b>SET SMALL CORNER F 23/23 GREY 2M</b>	●/○	Standard	2000	22.8	22.8	-	1



### Available lengths

Article no.      UVP/Pcs. (€)      Article no.      UVP/Pcs. (€)

1	<b>SET SMALL CORNER F 23/23 GREY</b>	FXZA4554	34.84	FXZA4555	59.50
---	--------------------------------------	----------	-------	----------	-------



# SET SMALL CORNER DC Easy Connect



**Product features:**





- High quality anodized drywall aluminum profile
- Extra thick base for optimal heat dissipation
- For corner mounting between ceiling and wall or wall and wall
- Simple and timeless design
- Optimal cooling and protection for LED Strips
- The profile set includes profile, cover and end caps

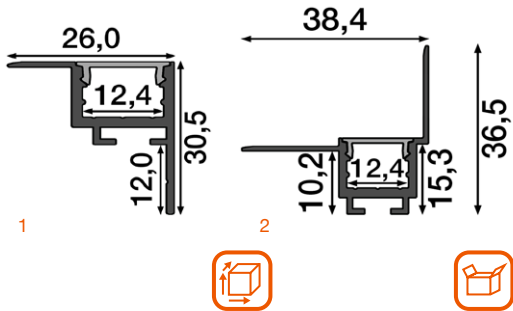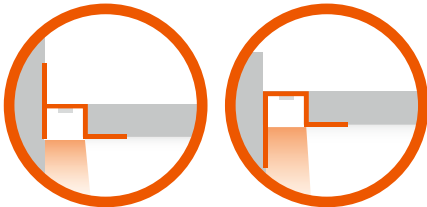

**Mounting:**

- Installation by screwing and plastering



Drywall corner profile sets			Profile / cover	Shape of the cover	l (mm)	w (mm)	h (mm)	b <sub>install</sub> (mm)	Pcs.
 									
1	FXZA4572	SET SMALL CORNER DC F 26/30 GREY 2M		Standard	2000	26.0	30.5	-	1
2	FXZA4573	SET SMALL CORNER DC F 38/36 GREY 2M		Standard	2000	38.4	36.5	-	1

Available lengths		Article no.	Article no.
1	SET SMALL CORNER DC F 26/30 GREY 2M	-	FXZA4572
2	SET SMALL CORNER DC F 38/36 GREY 2M	-	FXZA4573

## SET SMALL WING Easy Connect

### Product features:

- High quality anodized aluminum profile
- Extra thick base for the use of countersunk screws and for optimal heat dissipation
- Optimized for installation e.g. in suspended ceilings and furniture
- Simple and timeless design
- Optimal cooling and protection for LED Strips
- The profile set includes profile, cover and end caps



### Mounting:

- Installation with mounting brackets (available separately)
- Installation by screwing
- Installation by clamping and glueing




1



2



3



### Installation profile sets



Installation profile sets			Profile / cover	Shape of the cover	l (mm)	w (mm)	h (mm)	b <sub>instal</sub> (mm)	Pcs.
<div><div></div><div>s</div></div>									
1	FXZA4556	SET SMALL WING F 25/13 GREY 1M	●/○	Standard	1000	25.0	13.0	18.8	1
1	FXZA4557	SET SMALL WING F 25/13 GREY 2M	●/○	Standard	2000	25.0	13.0	18.8	1
2	FXZA4558	SET SMALL WING F 25/13 BLACK 1M	●/○	Standard	1000	25.0	13.0	18.8	1
2	FXZA4559	SET SMALL WING F 25/13 BLACK 2M	●/○	Standard	2000	25.0	13.0	18.8	1
3	FXZA4560	SET SMALL WING F 25/13 WHITE 1M	○/○	Standard	1000	25.0	13.0	18.8	1
3	FXZA4561	SET SMALL WING F 25/13 WHITE 2M	○/○	Standard	2000	25.0	13.0	18.8	1



### Available lengths

	Article no.	Article no.
1 SET SMALL WING F 25/13 GREY	FXZA4556	FXZA4557
2 SET SMALL WING F 25/13 BLACK	FXZA4558	FXZA4559
3 SET SMALL WING F 25/13 WHITE	FXZA4560	FXZA4561

Spring brackets separately available. Product details can be found on [page 90](#).

## SET SMALL WING DC Easy Connect

### Product features:

- High quality anodized drywall aluminum profile
- To be plastered in for frameless light lines
- Optimized for installation e.g. in suspended ceilings
- Simple and timeless design
- Optimal cooling and protection for LED Strips
- The profile set includes profile, cover and end caps




### Mounting:

- Installation by screwing and plastering



1

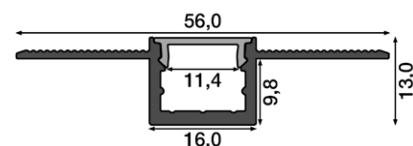

### Drywall installation profile sets

Profile / cover      Shape of the cover      l (mm)      w (mm)      h (mm)      b<sub>install</sub>(mm)      Pcs.



1	FXZA4564	<b>SET SMALL WING DC F 56/13 GREY 1M</b>		Standard	1000	56.0	13.0	16.0	1
1	FXZA4565	<b>SET SMALL WING DC F 56/13 GREY 2M</b>		Standard	2000	56.0	13.0	16.0	1



### Available lengths

Article no.

Article no.

1	<b>SET SMALL WING DC F 56/13 GREY</b>	FXZA4564	FXZA4565
---	---------------------------------------	----------	----------

## SET SMALL U FLOOR and W FLOOR Easy Connect


### Product features:

- High quality anodized aluminum profile with almost rimless light emission surface
- Solid design for floor installation
- Can be walked and driven on: High load capacity up to 500 kg
- Waterproof for indoor use: IP66
- Optimal cooling and protection for LED Strips
- The profile set includes profile, cover and end caps



### Mounting:


- Mounting by glueing in

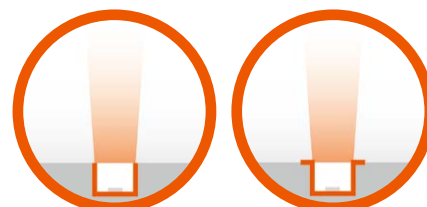


1



2



1



2



### Floor profile sets



Floor profile sets			Profile / cover	Shape of the cover	l (mm)	w (mm)	h (mm)	b <sub>install</sub> (mm)	Pcs.
<div><div></div><div></div><div>S</div></div>									
1	FXZA4566	SET SMALL U FLOOR F 21/27 GREY 1M	<div><div></div><div></div></div>	Standard	1000	21.4	27.0	21.4	1
1	FXZA4567	SET SMALL U FLOOR F 21/27 GREY 2M	<div><div></div><div></div></div>	Standard	2000	21.4	27.0	24.4	1
2	FXZA4568	SET SMALL W FLOOR F 27/11 GREY 1M	<div><div></div><div></div></div>	Standard	1000	27.1	11.0	27.1	1
2	FXZA4569	SET SMALL W FLOOR F 27/11 GREY 2M	<div><div></div><div></div></div>	Standard	2000	21.4	11.0	27.1	1



### Available lengths

		Article no.	Article no.
1	<b>SET SMALL U FLOOR F 21/27 GREY</b>	FXZA4566	FXZA4567
2	<b>SET SMALL W FLOOR F 27/11 GREY</b>	FXZA4568	FXZA4569

## SET XSMALL U Easy Connect

### Product features:

- High quality anodized aluminum profile with almost rimless light emission surface
- Extra thick base for the use of countersunk screws and for optimal heat dissipation
- Simple and timeless design
- Optimized for installation in acoustic panels
- Optimal cooling and protection for LED Strips
- The profile set includes profile, cover, end caps and brackets incl. screws



### Mounting:


- Installation with mounting brackets
- Installation by screwing



1



2



### Slat profile sets

Profile / cover      Shape of the cover      l (mm)      w (mm)      h (mm)      b<sub>install</sub>(mm)      Pcs.



1	FXZA4574	SET XSMALL U F 12/12 BLACK 1M	●/○	Standard	1000	12.2	12.4	-	1
1	FXZA4575	SET XSMALL U F 12/12 BLACK 2M	●/○	Standard	2000	12.2	12.4	-	1
2	FXZA4570	SET XSMALL U BLACK 12/12 BLACK 1M	●/●	Standard	1000	12.2	12.4	-	1
2	FXZA4571	SET XSMALL U BLACK 12/12 BLACK 2M	●/●	Standard	2000	12.2	12.4	-	1



### Available lengths

Article no.

Article no.


1	SET XSMALL U F 12/12 BLACK	FXZA4574	FXZA4575
2	SET XSMALL U BLACK 12/12 BLACK	FXZA4570	FXZA4571



## Attachment Profile SMALL U

### Product features:

- High quality anodized aluminum profile with almost rimless light emission surface
- Extra thick base for the use of countersunk screws and for optimal heat dissipation
- Versatile installation options
- Simple and timeless design
- Optimal cooling and protection for LED Strips

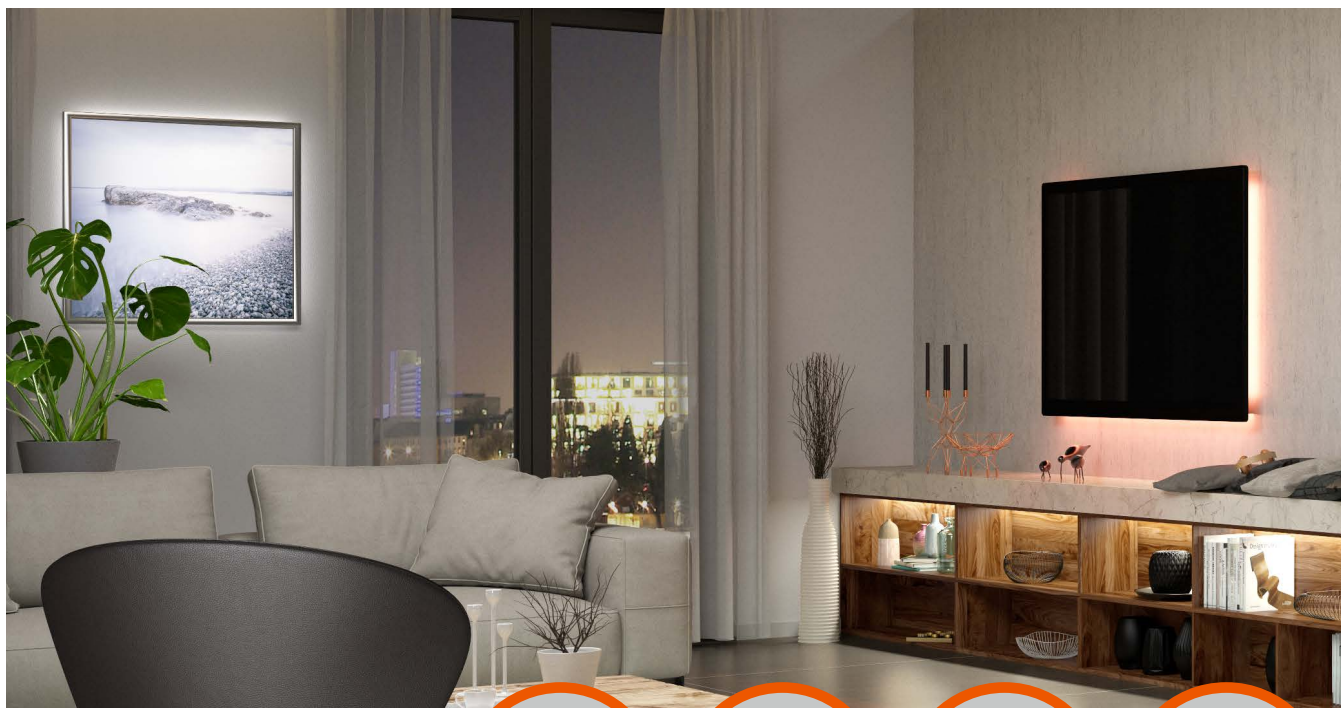

### Mounting:

- Installation with mounting brackets
- Installation by screwing
- Wire suspension



Article no.



Article no.



Article no.

### Available lengths

#### Profiles

1	<b>PROFILE SMALL U 17.3/16/B1C1</b>	TRPA2501	TRPA2502	TRPA2503
2	<b>PROFILE S U 17.3/16/B1C1 WHITE</b>	-	TRPA4210	-
3	<b>PROFILE S U 17.3/16/B1C1 BLACK</b>	-	TRPA4211	-

#### Covers

<b>COVER SMALL C 16.4/4/C1</b>	ZTPA2581	ZTPA2582	ZTPA2583
<b>COVER SMALL F 16.4/4/C1*</b>	ZTPA2571	ZTPA2572	ZTPA2573
<b>COVER SMALL BLACK 16.4/4 C1</b>	-	ZTPA4472	-
<b>COVER SMALL SQUARE 17/9 C1</b>	ZTPA3111	ZTPA3112	ZTPA3113

\*Info: Also available in 20 m length, see [page 91](#).



## PROFILE SMALL U

l (mm)

b (mm)

h (mm)

bi (mm)

Pcs.




1	TRPA2501	PROFILE SMALL U 17.3/16/B1C1 1M	1010	17.3	16.0	13.5	C1	B1	10
1	TRPA2502	PROFILE SMALL U 17.3/16/B1C1 2M	2010	17.3	16.0	13.5	C1	B1	10
2	TRPA4210	PROFILE S U 17.3/16/B1C1 2M WHITE	2010	17.3	16.0	13.5	C1	B1	10
3	TRPA4211	PROFILE S U 17.3/16/B1C1 2M BLACK	2010	17.3	16.0	13.5	C1	B1	10
1	TRPA2503	PROFILE SMALL U 17.3/16/B1C1 3M	3010	17.3	16.0	13.5	C1	B1	10
1	TRPA2505	PROFILE SMALL U 17.3/16/B1C1 5M*	5010	17.3	16.0	13.5	C1	B1	10

\*Note: Available on request

## Fitting covers


Clear

**COVER SMALL C 16.4/4/C1**  
ZTPA2581, ZTPA2582,  
ZTPA2583\*




Frosted

**COVER SMALL F 16.4/4/C1**  
ZTPA2571, ZTPA2572,  
ZTPA2573\*



Frosted

**COVER SMALL SQUARE 17/9 C1**  
ZTPA3111, ZTPA3112,  
ZTPA3113\*



## Fitting end caps

Plastic

**ENDCAP PROFILE SMALL U**  
ZTPA2610



Plastic

**ENDCAP SQUARE PROFILE SMALL U**  
ZTPA3190



## Fitting mounting accessories

Plastic mounting bracket

**BRACKET PROFILE SMALL PLT B1**


ZTPA2620



Metal mounting bracket

**BRACKET PROFILE SMALL MET B1**

ZTPA2621



Wire suspension

**SUSPENSION KIT PROFILE SMALL 2M 2PCS**  
ZTPA4576



Wire suspension live

**SUSPENSION KIT POWER PROFILE S B1 2M**

ZTPA3021



For details on profile accessories, refer to [page 90 ff.](#)

\*Info: The product is available in three standard lengths (1 m, 2 m, 3 m). The last digit of the article number represents the length in meters. Special lengths on request.

## Attachment Profile SMALL U FLAT

### Product features:

- High quality anodized aluminum profile with almost rimless light emission surface
- Extra thick base for the use of countersunk screws and for optimal heat dissipation
- Versatile installation options
- Simple and timeless design
- Optimal cooling and protection for LED Strips



### Mounting:

- Installation with mounting brackets
- Installation by screwing
- Wire suspension



Article no.



Article no.



Article no.

### Available lengths

#### Profiles

1	<b>PROFILE SMALL U FLAT 17.3/9.6/B1C1</b>	TRPA2511	TRPA2512	TRPA2513
2	<b>PROFILE S U FLAT 17.3/9.6/B1C1 WHITE</b>	-	TRPA4212	-
3	<b>PROFILE S U FLAT 17.3/9.6/B1C1 BLACK</b>	-	TRPA4213	-

#### Covers

<b>COVER SMALL C 16.4/4/C1</b>	ZTPA2581	ZTPA2582	ZTPA2583
<b>COVER SMALL F 16.4/4/C1*</b>	ZTPA2571	ZTPA2572	ZTPA2573
<b>COVER SMALL BLACK 16.4/4 C1</b>	-	ZTPA4472	-
<b>COVER SMALL SQUARE 17/9 C1</b>	ZTPA3111	ZTPA3112	ZTPA3113

\*Info: Also available in 20 m length, see [page 75](#).



## PROFILE SMALL U FLAT

l (mm)

b (mm)

h (mm)

bi (mm)

Pcs.




1	TRPA2511	PROFILE SMALL U FLAT 17.3/9.6/B1C1 1M	1010	17.3	9.6	13.5	C1	B1	10
1	TRPA2512	PROFILE SMALL U FLAT 17.3/9.6/B1C1 2M	2010	17.3	9.6	13.5	C1	B1	10
2	TRPA4212	PROFILE S U FLAT 17.3/9.6/B1C1 2M WHITE	2010	17.3	9.6	13.5	C1	B1	10
3	TRPA4213	PROFILE S U FLAT 17.3/9.6/B1C1 2M BLACK	2010	17.3	9.6	13.5	C1	B1	10
1	TRPA2513	PROFILE SMALL U FLAT 17.3/9.6/B1C1 3M	3010	17.3	9.6	13.5	C1	B1	10
1	TRPA2515	PROFILE SMALL U FLAT 17.3/9.6/B1C1 5M*	5010	17.3	9.6	13.5	C1	B1	10

\*Note: Available on request

## Fitting covers


Clear

**COVER SMALL C 16.4/4/C1**  
ZTPA2581, ZTPA2582,  
ZTPA2583\*




Frosted

**COVER SMALL F 16.4/4/C1**  
ZTPA2571, ZTPA2572,  
ZTPA2573\*



Frosted

**COVER SMALL SQUARE 17/9 C1**  
ZTPA3111, ZTPA3112,  
ZTPA3113\*



## Fitting end caps

Plastic

**ENDCAP PROFILE SMALL U FLAT**  
ZTPA2611



Plastic

**ENDCAP SQUARE PROFILE SMALL U FLAT**  
ZTPA3191



## Fitting mounting accessories

Plastic mounting bracket

**BRACKET PROFILE SMALL PLT B1**


ZTPA2620



Metal mounting bracket

**BRACKET PROFILE SMALL MET B1**

ZTPA2621



Wire suspension

**SUSPENSION KIT PROFILE SMALL 2M 2PCS**  
ZTPA4576



Wire suspension live

**SUSPENSION KIT POWER PROFILE S B1 2M**

ZTPA3021




For details on profile accessories, refer to [page 90 ff.](#)

\*Info: The product is available in three standard lengths (1 m, 2 m, 3 m). The last digit of the article number represents the length in meters. Special lengths on request.

## Attachment Profile SMALL CORNER

### Product features:

- High quality anodized aluminum profile with almost rimless light emission surface
- Extra thick base for the use of countersunk screws and for optimal heat dissipation
- Versatile installation options
- Simple and timeless design
- Optimal cooling and protection for LED Strips

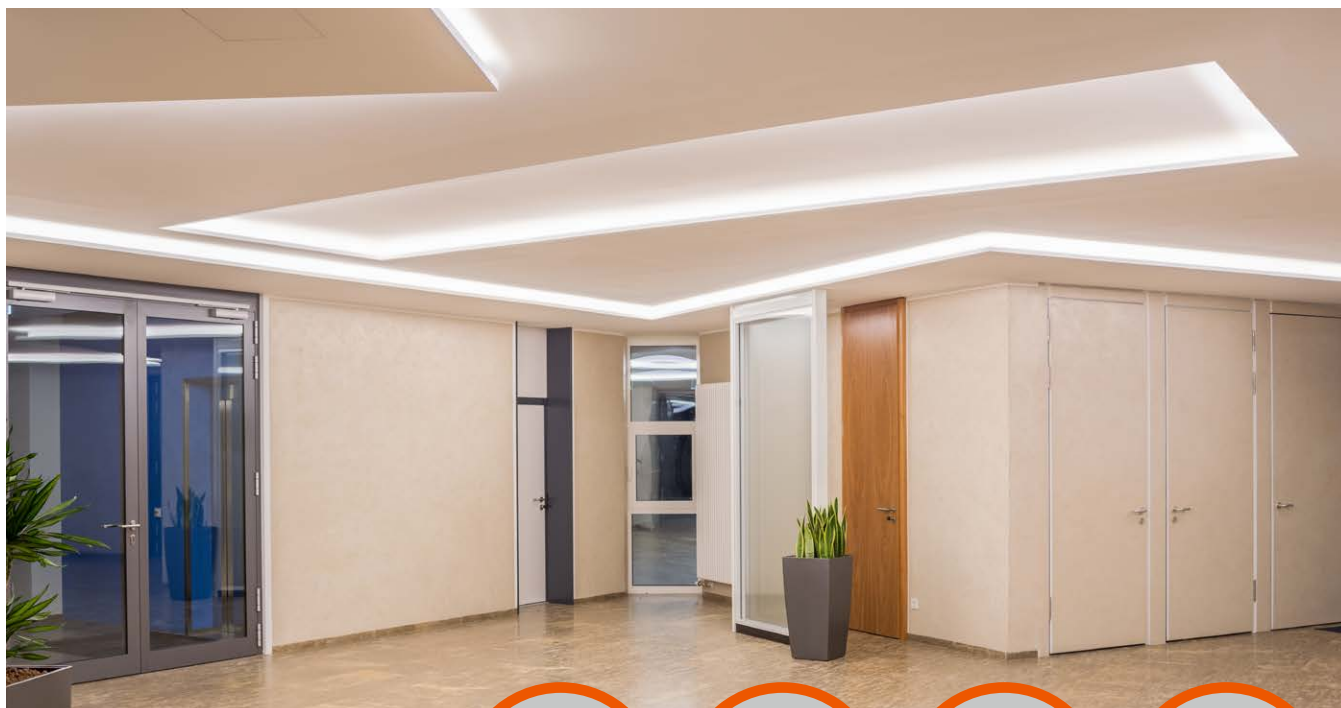

### Mounting:

- Installation with mounting brackets
- Installation by screwing



Article no.



Article no.



Article no.

### Available lengths

#### Profiles

1 **PROFILE SMALL CORNER 22.8/22.8/B1C1**

TRPA2531

TRPA2532

TRPA2533

#### Covers

**COVER SMALL C 16.4/4/C1**

ZTPA2581

ZTPA2582

ZTPA2583

**COVER SMALL F 16.4/4/C1\***

ZTPA2571

ZTPA2572


ZTPA2573

\*Info: Also available in 20 m length, see [page 91](#).





1



## PROFILE SMALL CORNER

l (mm)

b (mm)

bi (mm)

Pcs.




1	TRPA2531	PROFILE SMALL CORNER 22.8/22.8/B1C1 1M	1010	22.8	13.5	C1	B1	8
1	TRPA2532	PROFILE SMALL CORNER 22.8/22.8/B1C1 2M	2010	22.8	13.5	C1	B1	8
1	TRPA2533	PROFILE SMALL CORNER 22.8/22.8/B1C1 3M	3010	22.8	13.5	C1	B1	8
1	TRPA2535	PROFILE SMALL CORNER 22.8/22.8/B1C1 5M*	5010	22.8	13.5	C1	B1	8

\*Note: Available on request

## Fitting covers


Clear

**COVER SMALL C 16.4/4/C1**  
ZTPA2581, ZTPA2582,  
ZTPA2583\*



Frosted

**COVER SMALL F 16.4/4/C1**  
ZTPA2571, ZTPA2572,  
ZTPA2573\*



## Fitting end caps

Plastic

**ENDCAP PROFILE SMALL CORNER**  
ZTPA2613



## Fitting mounting accessories


Plastic mounting bracket

**BRACKET PROFILE SMALL PLT B1**  
ZTPA2620



Metal mounting bracket

**BRACKET PROFILE SMALL MET B1**  
ZTPA2621



For details on profile accessories, refer to [page 90 ff.](#)

\*Info: The product is available in three standard lengths (1 m, 2 m, 3 m). The last digit of the article number represents the length in meters. Special lengths on request..



## Installation Profile SMALL WING

### Product features:

- High quality anodized aluminum profile
- Extra thick base for the use of countersunk screws and for optimal heat dissipation
- Optimized for installation e.g. in suspended ceilings and furniture
- Simple and timeless design
- Optimal cooling and protection for LED Strips



### Mounting:

- Installation with mounting brackets
- Installation by screwing
- Installation by clamping and glueing



Article no.



Article no.



Article no.

### Available lengths

#### Profiles

1	<b>PROFILE SMALL WING 25/13/B1C1</b>	TRPA2521	TRPA2522	TRPA2523
2	<b>PROFILE S WING 25/13/B1C1 WHITE</b>	-	TRPA4214	-
3	<b>PROFILE S WING 25/13/B1C1 BLACK</b>	-	TRPA4215	-

#### Covers

	<b>COVER SMALL C 16.4/4/C1</b>	ZTPA2581	ZTPA2582	ZTPA2583
	<b>COVER SMALL F 16.4/4/C1*</b>	ZTPA2571	ZTPA2572	ZTPA2573
	<b>COVER SMALL BLACK 16.4/4 C1</b>	-	ZTPA4472	-

\*Info: Also available in 20m length, see [page 91](#).




1



2



3



## PROFILE SMALL WING

l (mm)   b (mm)   h (mm)   bi (mm)   be<sub>min</sub> (mm)   be<sub>max</sub> (mm)   he<sub>min</sub> (mm)   Pcs.




1	TRPA2521	<b>PROFILE SMALL WING 25/13/B1C1 1M</b>	1010	24.8	13.0	13.5	17.3	18.8	12.5	C1	B1	10
1	TRPA2522	<b>PROFILE SMALL WING 25/13/B1C1 2M</b>	2010	24.8	13.0	13.5	17.3	18.8	12.5	C1	B1	10
2	TRPA4214	<b>PROFILE S WING 25/13/B1C1 2M WHITE</b>	2010	24.8	13.0	13.5	17.3	18.8	12.5	C1	B1	10
3	TRPA4215	<b>PROFILE S WING 25/13/B1C1 2M BLACK</b>	2010	24.8	13.0	13.5	17.3	18.8	12.5	C1	B1	10
1	TRPA2523	<b>PROFILE SMALL WING 25/13/B1C1 3M</b>	3010	24.8	13.0	13.5	17.3	18.8	12.5	C1	B1	10
1	TRPA2525	<b>PROFILE SMALL WING 25/13/B1C1 5M*</b>	5010	24.8	13.0	13.5	17.3	18.8	12.5	C1	B1	10

\*Note: Available on request

## Fitting covers


Clear

**COVER SMALL C 16.4/4/C1**  
ZTPA2581, ZTPA2582,  
ZTPA2583\*



Frosted

**COVER SMALL F 16.4/4/C1**  
ZTPA2571, ZTPA2572,  
ZTPA2573\*



## Fitting end caps

Plastic

**ENDCAP PROFILE SMALL WING**  
ZTPA2612



## Fitting mounting accessories


Plastic mounting bracket

**BRACKET PROFILE SMALL PLT B1**  
ZTPA2620



Metal mounting bracket

**BRACKET PROFILE SMALL MET B1**  
ZTPA2621



Spring mounting bracket

**BRACKET SPRING SMALL B1**  
ZTPA2624



For details on profile accessories, refer to [page 90 ff.](#)

\*Info: The product is available in three standard lengths (1 m, 2 m, 3 m). The last digit of the article number represents the length in meters. Special lengths on request.

## Attachment Profile MEDIUM U

### Product features:

- High quality anodized aluminum profile with almost rimless light emission surface
- Optimal cooling and protection for up to two LED Strips
- Versatile installation options
- Simple and timeless design
- Internal, invisible mounting brackets



### Mounting:

- Installation with mounting brackets
- Installation by screwing
- Wire suspension



Article no.



Article no.



Article no.

### Available lengths

#### Profiles

1	<b>PROFILE MEDIUM U 27/25.9/B2C2</b>	TRPA2541	TRPA2542	TRPA2543
2	<b>PROFILE M U 27/25.9/B2C2 WHITE</b>	-	TRPA4216	-
3	<b>PROFILE M U 27/25.9/B2C2 BLACK</b>	-	TRPA4217	-

#### Covers

<b>COVER MEDIUM F 26/5/C2*</b>	ZTPA2591	ZTPA2592	ZTPA2593
<b>COVER MEDIUM SQUARE 27/14 C2</b>	ZTPA3121	ZTPA3122	ZTPA3123
<b>COVER MEDIUM BLACK 26/5 C2</b>	-	ZTPA4482	-
<b>COVER MEDIUM PRISMA 26/5 C2</b>	-	ZTPA4492	-

\*Info: Also available in 20m length, see [page 91](#).



## PROFILE MEDIUM U

l (mm)

b (mm)

h (mm)

bi (mm)

Pcs.




1	TRPA2541	PROFILE MEDIUM U 27/25.9/B2C2 1M	1010	27.0	25.9	22.2	C2	B2	4
1	TRPA2542	PROFILE MEDIUM U 27/25.9/B2C2 2M	2010	27.0	25.9	22.2	C2	B2	4
2	TRPA4216	PROFILE M U 27/25.9/B2C2 2M WHITE	2010	27.0	25.9	22.2	C2	B2	4
3	TRPA4217	PROFILE M U 27/25.9/B2C2 2M BLACK	2010	27.0	25.9	22.2	C2	B2	4
1	TRPA2543	PROFILE MEDIUM U 27/25.9/B2C2 3M	3010	27.0	25.9	22.2	C2	B2	4
1	TRPA2545	PROFILE MEDIUM U 27/25.9/B2C2 5M*	5010	27.0	25.9	22.2	C2	B2	4

\*Note: Available on request

## Fitting covers


Frosted

**COVER MEDIUM F 26/5/C2**  
ZTPA2591, ZTPA2592,  
ZTPA2593\*



Frosted

**COVER MEDIUM SQUARE 27/14 C2**  
ZTPA3121, ZTPA3122,  
ZTPA3123\*



## Fitting end caps

Plastic

**ENDCAP PROFILE MEDIUM U**  
ZTPA2614



Plastic

**ENDCAP SQUARE PROFILE MEDIUM U**  
ZTPA3193



## Fitting mounting accessories

Plastic mounting bracket

**BRACKET PROFILE MEDIUM PLT B2**  
ZTPA2622



Metal mounting bracket

**BRACKET PROFILE MEDIUM MET B2**  
ZTPA2623



Wire suspension

**SUSPENSION KIT PROFILE M B2 2M**  
ZTPA3020



Wire suspension live

**SUSPENSION KIT POWER PROFILE M B2 2M**  
ZTPA3022



For details on profile accessories, refer to [page 90 ff.](#)

\*Info: The product is available in three standard lengths (1 m, 2 m, 3 m). The last digit of the article number represents the length in meters. Special lengths on request.

## Attachment Profile MEDIUM U FLAT

### Product features:

- High quality anodized aluminum profile with almost rimless light emission surface
- Optimal cooling and protection for up to two LED Strips
- Versatile installation options
- Simple and timeless design
- Internal, invisible mounting brackets



### Mounting:

- Installation with mounting brackets
- Installation by screwing
- Wire suspension



Article no.



Article no.



Article no.

### Available lengths

#### Profiles

1	<b>PROFILE MEDIUM U FLAT 27/10.2/B2C2</b>	TRPA2551	TRPA2552	TRPA2553
2	<b>PROFILE M U FLAT 27/10.2/B2C2 WHITE</b>	-	TRPA4218	-
3	<b>PROFILE M U FLAT 27/10.2/B2C2 BLACK</b>	-	TRPA4219	-

#### Covers

<b>COVER MEDIUM F 26/5/C2*</b>	ZTPA2591	ZTPA2592	ZTPA2593
<b>COVER MEDIUM SQUARE 27/14 C2</b>	ZTPA3121	ZTPA3122	ZTPA3123
<b>COVER MEDIUM BLACK 26/5 C2</b>	-	ZTPA4482	-
<b>COVER MEDIUM PRISMA 26/5 C2</b>	-	ZTPA4492	ZTPA4493

\*Info: Also available in 20 m length, see [page 91](#).




1



2



3



## PROFILE MEDIUM U FLAT

l (mm)

b (mm)

h (mm)

bi (mm)

Pcs.




1	TRPA2551	PROFILE MEDIUM U FLAT 27/10.2/B2C2 1M	1010	27.0	10.2	22.2	C2	B2	6
1	TRPA2552	PROFILE MEDIUM U FLAT 27/10.2/B2C2 2M	2010	27.0	10.2	22.2	C2	B2	6
2	TRPA4218	PROFILE M U FLAT 27/10.2/B2C2 2M WHITE	2010	27.0	10.2	22.2	C2	B2	6
3	TRPA4219	PROFILE M U FLAT 27/10.2/B2C2 2M BLACK	2010	27.0	10.2	22.2	C2	B2	6
1	TRPA2553	PROFILE MEDIUM U FLAT 27/10.2/B2C2 3M	3010	27.0	10.2	22.2	C2	B2	6
1	TRPA2555	PROFILE MEDIUM U FLAT 27/10.2/B2C2 5M*	5010	27.0	10.2	22.2	C2	B2	6

\*Note: Available on request

## Fitting covers


Frosted

**COVER MEDIUM F 26/5/C2**  
ZTPA2591, ZTPA2592,  
ZTPA2593\*



Frosted

**COVER MEDIUM SQUARE 27/14 C2**  
ZTPA3121, ZTPA3122,  
ZTPA3123\*



## Fitting end caps

Plastic

**ENDCAP PROFILE MEDIUM U FLAT**  
ZTPA2615



Plastic

**ENDCAP SQUARE PROFILE MEDIUM U FLAT**  
ZTPA3193



## Fitting mounting accessories

Plastic mounting bracket

**BRACKET PROFILE MEDIUM PLT B2**  
ZTPA2622



Metal mounting bracket

**BRACKET PROFILE MEDIUM MET B2**  
ZTPA2623



Wire suspension

**SUSPENSION KIT PROFILE M B2 2M**  
ZTPA3020



Wire suspension live

**SUSPENSION KIT POWER PROFILE M B2 2M**  
ZTPA3022



For details on profile accessories, refer to [page 90 ff.](#)


\*Info: The product is available in three standard lengths (1 m, 2 m, 3 m). The last digit of the article number represents the length in meters. Special lengths on request.



## Installation Profile MEDIUM WING

### Product features:

- High quality anodized aluminum profile
- Optimal cooling and protection for up to two LED Strips
- Optimized for installation e.g. in suspended ceilings and furniture
- Simple and timeless design

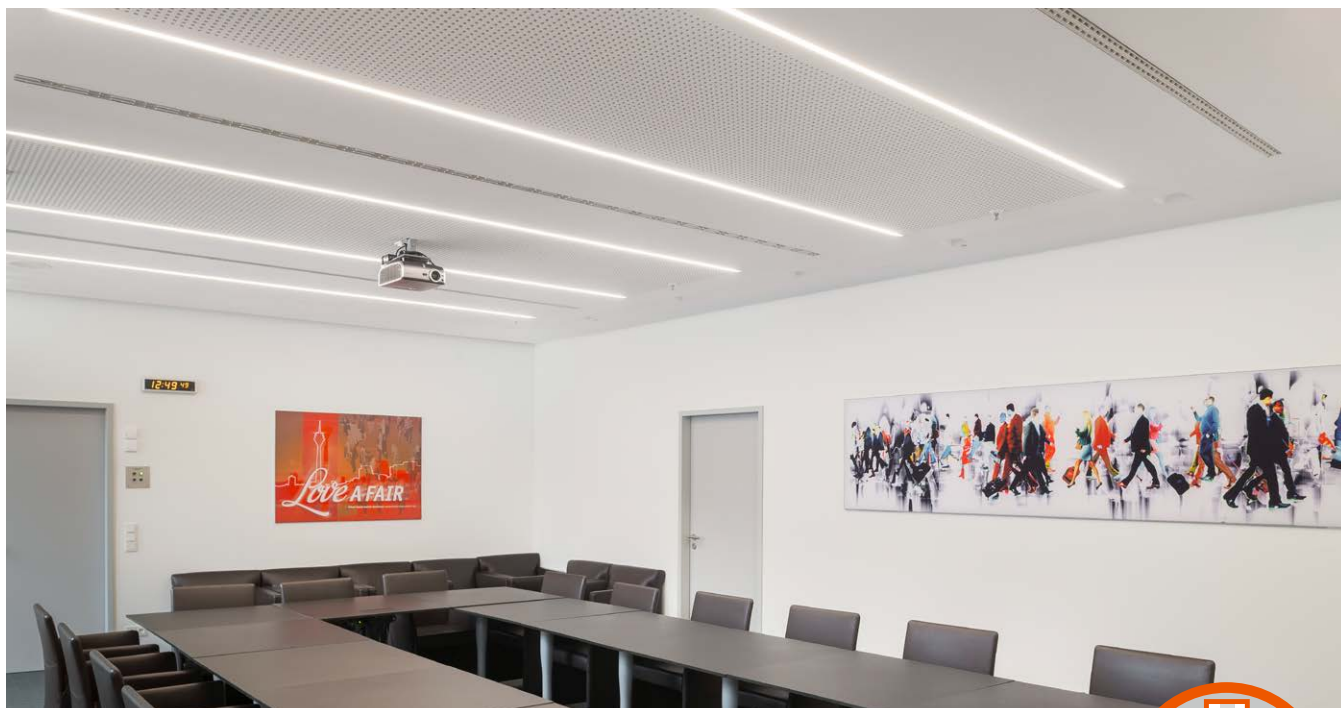

### Mounting:

- Installation with mounting brackets
- Installation by screwing
- Installation by clamping and glueing



### Available lengths

Article no.

Article no.

Article no.

#### Profiles

1	<b>PROFILE MEDIUM WING 40/25.9/B2C2</b>	TRPA2561	TRPA2562	TRPA2563
2	<b>PROFILE M WING 40/25.9/B2C2 WHITE</b>	-	TRPA4220	-
3	<b>PROFILE M WING 40/25.9/B2C2 BLACK</b>	-	TRPA4221	-

#### Covers

<b>COVER MEDIUM F 26/5/C2*</b>	ZTPA2591	ZTPA2592	ZTPA2593
<b>COVER MEDIUM BLACK 26/5 C2</b>	-	ZTPA4482	-
<b>COVER MEDIUM PRISMA 26/5 C2</b>	-	ZTPA4492	ZTPA4493

\*Info: Also available in 20 m length, see [page 91](#).




1



2



3

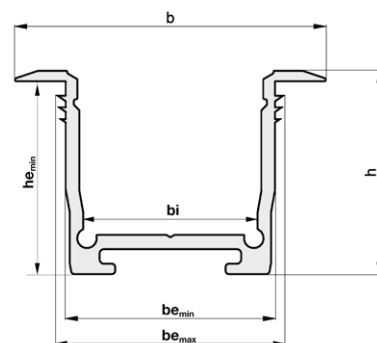

## PROFILE MEDIUM WING

l (mm) b (mm) h (mm) bi (mm) be\_min (mm) be\_max (mm) he\_min (mm) Pcs.




1	TRPA2561	PROFILE MEDIUM WING 40/25.9/B2C2 1M	1010	40.0	25.9	22.2	27.0	28.0	24.4	C2	B2	4
1	TRPA2562	PROFILE MEDIUM WING 40/25.9/B2C2 2M	2010	40.0	25.9	22.2	27.0	28.0	24.4	C2	B2	4
2	TRPA4220	PROFILE M WING 40/25.9/B2C2 2M WHITE	2010	40.0	25.9	22.2	27.0	28.0	24.4	C2	B2	4
3	TRPA4221	PROFILE M WING 40/25.9/B2C2 2M BLACK	2010	40.0	25.9	22.2	27.0	28.0	24.4	C2	B2	4
1	TRPA2563	PROFILE MEDIUM WING 40/25.9/B2C2 3M	3010	40.0	25.9	22.2	27.0	28.0	24.4	C2	B2	4
1	TRPA2565	PROFILE MEDIUM WING 40/25.9/B2C2 5M*	5010	40.0	25.9	22.2	27.0	28.0	24.4	C2	B2	4

\*Note: Available on request

## Fitting covers


Frosted

**COVER MEDIUM F 26/5/C2**  
ZTPA2591, ZTPA2592,  
ZTPA2593\*



Prism optic

**COVER MEDIUM PRISMA 26/5 C2**  
ZTPA4492, ZTPA4493



## Fitting end caps

Plastic

**ENDCAP PROFILE MEDIUM WING**  
ZTPA2616



## Fitting mounting accessories

Plastic mounting bracket

**BRACKET PROFILE MEDIUM PLT B2**  
ZTPA2622



Metal mounting bracket

**BRACKET PROFILE MEDIUM MET B2**  
ZTPA2623



Spring mounting bracket

**BRACKET SPRING MEDIUM B2**  
ZTPA2625



For details on profile accessories, refer to [page 90 ff.](#)

\*Info: The product is available in three standard lengths (1 m, 2 m, 3 m). The last digit of the article number represents the length in meters. Special lengths on request.

## Accessories for Aluminum Profiles



### Mounting brackets


Mounting brackets			l (mm)	w (mm)	h (mm)		Pcs.	
1	ZTPA2621	BRACKET PROFILE SMALL MET B1	20.0	18.5	8.0	B1	Metall	10
2	ZTPA2620	BRACKET PROFILE SMALL PLT B1	34.0	20.0	10.0	B1	Plastic	10
2	ZTPA4434	BRACKET PROFILE SMALL PLT B1 WHITE	34.0	20.0	10.0	B1	Plastic	10
2	ZTPA4433	BRACKET PROFILE SMALL PLT B1 BLACK	34.0	20.0	10.0	B1	Plastic	10
3	ZTPA2624	BRACKET SPRING SMALL B1	28.0	55.0	32.0	B1	Plastic	10
4	ZTPA2623	BRACKET PROFILE MEDIUM MET B2	20.0	15.0	5.9	B2	Metall	10
5	ZTPA2622	BRACKET PROFILE MEDIUM PLT B2	30.0	16.0	5.7	B2	Plastic	10
6	ZTPA2625	BRACKET SPRING MEDIUM B2	28.0	50.0	50.0	B2	Plastic	10



### Universal wire suspension

Universal wire suspension			l (m)	Pcs.
1	ZTPA4576	SUSPENSION KIT PROFILE SMALL 2M 2PCS	2	1
2	ZTPA3020	SUSPENSION KIT PROFILE M B2 2M	2	1
3	ZTPA3021	SUSPENSION KIT POWER PROFILE S B1 2M	2	1
4	ZTPA3022	SUSPENSION KIT POWER PROFILE M B2 2M	2	1

**Note:** One kit contains two suspension ropes. The POWER version enables the power supply through the ropes.

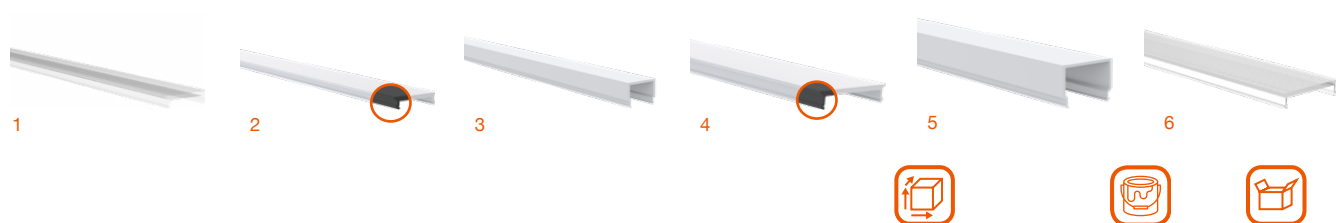


## Profile covers

		l (mm)	w (mm)	h (mm)		Pcs.
1	ZTPA2581 <b>COVER SMALL C 16.4/4/C1 1M</b>	1010	16.4	4.0	⊗	10
2	ZTPA2571 <b>COVER SMALL F 16.4/4/C1 1M</b>	1010	16.4	4.0	○	10
2	ZTPA4472 <b>COVER SMALL BLACK 16.4/4 C1 2M</b>	2010	16.4	4.0	●	10
3	ZTPA3111 <b>COVER SMALL SQUARE 17/9 C1 1M</b>	1010	17.3	12.6	○	18
4	ZTPA2591 <b>COVER MEDIUM F 26/5/C2 1M</b>	1010	26.0	5.0	○	10
4	ZTPA4482 <b>COVER MEDIUM BLACK 26/5 C2 2M</b>	2010	26.0	5.0	●	10
5	ZTPA3121 <b>COVER MEDIUM SQUARE 27/14 C2 1M</b>	1010	27.0	18.6	○	8
6	ZTPA4492 <b>COVER MEDIUM PRISMA 26/5 C2 2M</b>	2010	26.0	5.0	⊗	10

## Available lengths profile covers


		1 m	2 m	3 m	20 m
	Article no.	Article no..	Article no..	Article no..	
1	<b>COVER SMALL C 16.4/4/C1</b>	ZTPA2581	ZTPA2582	ZTPA2583	-
2	<b>COVER SMALL F 16.4/4/C1</b>	ZTPA2571	ZTPA2572	ZTPA2573	ZTPA2570
2	<b>COVER SMALL BLACK 16.4/4 C1</b>	-	ZTPA4472	-	-
3	<b>COVER SMALL SQUARE 17/9 C1</b>	ZTPA3111	ZTPA3112	ZTPA3113	-
4	<b>COVER MEDIUM F 26/5/C2</b>	ZTPA2591	ZTPA2592	ZTPA2593	ZTPA2590
4	<b>COVER MEDIUM BLACK 26/5/C2</b>	-	ZTPA4482	-	-
5	<b>COVER MEDIUM SQUARE 27/14 C2</b>	ZTPA3121	ZTPA3122	ZTPA3123	-
6	<b>COVER MEDIUM PRISMA 26/5 C2</b>	-	ZTPA4492	ZTPA4493	-

## Accessories for Aluminum Profiles

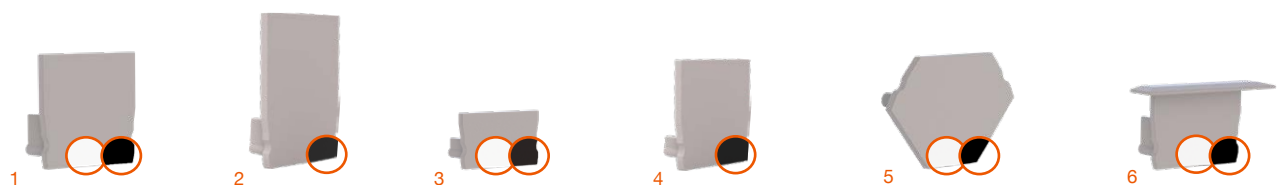

### End caps for profiles SMALL

		l (mm)	w (mm)	h (mm)		Pcs.
1	ZTPA2610 <b>ENDCAP PROFILE SMALL U</b>	6.0	17.3	16.0	●	10
1	ZTPA4401 <b>ENDCAP PROFILE SMALL U WHITE</b>	6.0	17.3	16.0	○	10
1	ZTPA4400 <b>ENDCAP PROFILE SMALL U BLACK</b>	6.0	17.3	16.0	●	10
2	ZTPA3190 <b>ENDCAP SQUARE PROFILE S U GREY</b>	6.3	17.3	24.7	●	10
2	ZTPA3194 <b>ENDCAP SQUARE PROFILE S U BLACK</b>	6.3	17.3	24.7	●	10
3	ZTPA2611 <b>ENDCAP PROFILE SMALL U FLAT</b>	6.0	17.3	9.6	●	10
3	ZTPA4406 <b>ENDCAP PROFILE SMALL U FLAT WHITE</b>	6.0	17.3	9.6	○	10
3	ZTPA4405 <b>ENDCAP PROFILE SMALL U FLAT BLACK</b>	6.0	17.3	9.6	●	10
4	ZTPA3191 <b>ENDCAP SQUARE PROFILE S U FLAT GREY</b>	6.3	17.3	18.3	●	10
4	ZTPA3195 <b>ENDCAP SQUARE PROFILE S U FLAT BLACK</b>	6.3	17.3	18.3	●	10
5	ZTPA2613 <b>ENDCAP PROFILE SMALL CORNER</b>	6.0	20.9	20.9	●	10
5	ZTPA4413 <b>ENDCAP PROFILE SMALL CORNER WHITE</b>	6.0	20.9	20.9	○	10
5	ZTPA4412 <b>ENDCAP PROFILE SMALL CORNER BLACK</b>	6.0	20.9	20.9	●	10
6	ZTPA2612 <b>ENDCAP PROFILE SMALL WING</b>	6.0	24.9	13.0	●	10
6	ZTPA4411 <b>ENDCAP PROFILE SMALL WING WHITE</b>	6.0	24.9	13.0	○	10
6	ZTPA4410 <b>ENDCAP PROFILE SMALL WING BLACK</b>	6.0	24.9	13.0	●	10

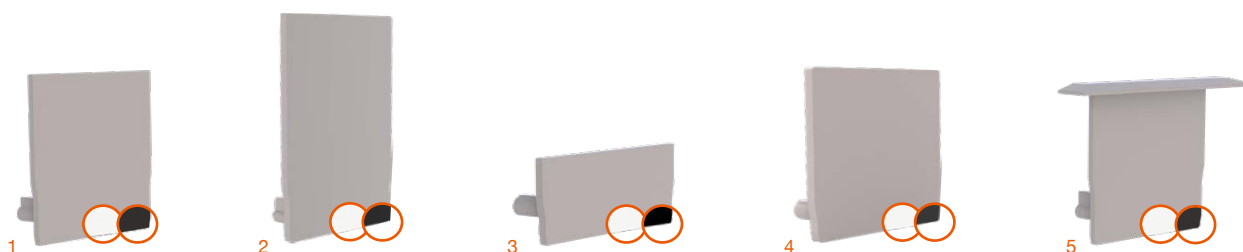












### End caps for profiles MEDIUM

		l (mm)	w (mm)	h (mm)		Pcs.
1	ZTPA2614 <b>ENDCAP PROFILE MEDIUM U</b>	6.0	27.0	25.9	●	10
1	ZTPA4960 <b>ENDCAP PROFILE MEDIUM U WHITE</b>	6.0	27.0	25.9	○	10
1	ZTPA2617 <b>ENDCAP PROFILE MEDIUM U BLACK</b>	6.0	27.0	25.9	●	10
2	ZTPA3192 <b>ENDCAP SQUARE PROFILE M U GREY</b>	6.5	27.0	39.0	●	10
2	ZTPA4963 <b>ENDCAP SQUARE PROFILE M U WHITE</b>	6.5	27.0	39.0	○	10
2	ZTPA3196 <b>ENDCAP SQUARE PROFILE M U BLACK</b>	6.5	27.0	39.0	●	10
3	ZTPA2615 <b>ENDCAP PROFILE MEDIUM U FLAT</b>	6.0	27.0	10.2	●	10
3	ZTPA4961 <b>ENDCAP PROFILE MEDIUM U FLAT WHITE</b>	6.0	27.0	10.2	○	10
3	ZTPA2618 <b>ENDCAP PROFILE MEDIUM U FLAT BLACK</b>	6.0	27.0	10.2	●	10
4	ZTPA3193 <b>ENDCAP SQUARE PROFILE M U FLAT GREY</b>	6.5	27.0	23.8	●	10
4	ZTPA4964 <b>ENDCAP SQUARE PROFILE M U FLAT WHITE</b>	6.5	27.0	23.8	○	10
4	ZTPA3197 <b>ENDCAP SQUARE PROFILE M U FLAT BLACK</b>	6.5	27.0	23.8	●	10
5	ZTPA2616 <b>ENDCAP PROFILE MEDIUM WING</b>	6.0	40.0	25.9	●	10
5	ZTPA4962 <b>ENDCAP PROFILE MEDIUM WING WHITE</b>	6.0	40.0	25.9	○	10
5	ZTPA2619 <b>ENDCAP PROFILE MEDIUM WING BLACK</b>	6.0	40.0	25.9	●	10















## Compatibility of Accessories SMALL

Product family		PROFILE SMALL U	PROFILE SMALL U FLAT	PROFILE SMALL CORNER	PROFILE SMALL WING
Page		60	62	64	66
<b>BRACKET PROFILE SMALL MET B1</b> ZTPA2621		x	x	x	x
<b>BRACKET PROFILE SMALL PLT B1</b> ZTPA2620 ● ZTPA4434 ○ ZTPA4433 ●		x	x	x	x
<b>BRACKET SPRING SMALL B1</b> ZTPA2624					x
<b>ENDCAP PROFILE SMALL U</b> ZTPA2610 ● ZTPA4401 ○ ZTPA2717 ●		x			
<b>ENDCAP PROFILE SMALL U FLAT</b> ZTPA2611 ● ZTPA4406 ○ ZTPA2718 ●			x		
<b>ENDCAP PROFILE SMALL CORNER</b> ZTPA2613 ● ZTPA4413 ○ ZTPA2720 ●				x	
<b>ENDCAP PROFILE SMALL WING</b> ZTPA2612 ● ZTPA4411 ○ ZTPA2719 ●					x
<b>ENDCAP SQUARE PROFILE SMALL U</b> ZTPA3190 ● ZTPA3194 ●		x*			
<b>ENDCAP SQUARE PROFILE SMALL U FLAT</b> ZTPA3191 ● ZTPA3195 ●			x*		
<b>SUSPENSION KIT PROFILE SMALL</b> 2M 2PCS ZTPA4576		x	x	x	
<b>SUSPENSION KIT POWER PROFILE S B1 2M</b> ZTPA3021		x	x	x	

\*Note: In combination with COVER SMALL SQUARE 17/9 C1

## Compatibility of Accessories MEDIUM

Product family		PROFILE MEDIUM U	PROFILE MEDIUM U FLAT	PROFILE MEDIUM WING
		68	70	72
<b>BRACKET PROFILE MEDIUM MET B2</b> ZTPA2623		x	x	x
<b>BRACKET PROFILE MEDIUM PLT B2</b> ZTPA2622		x	x	x
<b>BRACKET SPRING MEDIUM B2</b> ZTPA2625				x
<b>ENDCAP PROFILE MEDIUM U</b> ZTPA2614 ● ZTPA4960 ○ ZTPA2617 ●		x		
<b>ENDCAP PROFILE MEDIUM U FLAT</b> ZTPA2615 ● ZTPA4961 ○ ZTPA2618 ●			x	
<b>ENDCAP PROFILE MEDIUM WING</b> ZTPA2616 ● ZTPA4962 ○ ZTPA2619 ●				x
<b>ENDCAP SQUARE PROFILE MEDIUM U</b> ZTPA3192 ● ZTPA4963 ○ ZTPA3196 ●		x*		
<b>ENDCAP SQUARE PROFILE MEDIUM U FLAT</b> ZTPA3193 ● ZTPA4964 ○ ZTPA3197 ●			x*	
<b>SUSPENSION KIT PROFILE M B2 2M</b> ZTPA3020		x	x	
<b>SUSPENSION KIT POWER PROFILE M B2 2M</b> ZTPA3022		x	x	

\*Note: In combination with COVER MEDIUM SQUARE 27/14 C2



# Products.

## Power Supply.

With the control gears offered by Radium you will find the right solution for every requirement indoors and outdoors. The energy-efficient, powerful and durable devices are designed for the operation of LED modules with constant voltage DC and they are easy to install. In combination with our LED Strips, you can implement future-proof systems with high light quality and highest operational safety requirements.

#### **Product features:**

- Optimized and approved for the operation of LEDs for lighting purposes
- Protection against excess voltage and high temperatures
- For indoor and outdoor applications: protection class up to IP67
- Fully integrable into many building automation systems





# Content

LED Drivers	98
LED Drivers Easy Connect	99
LED Phasecut Drivers	99
Dimmable LED Drivers	100
LED Dimmers	102

<u>DRIVER</u>	<u>DALI</u>	<u>4CH</u>	<u>50W</u>	/	<u>24V</u>	<u>IP20</u>	<u>RADIUM</u>
Product category			Maximum output power in watts (W)		Output voltage in volts (V)		Manufacturer:
	Dimming interface:					IP protection:	- Radium
	- 1-10V					- IP20	- OSRAM
	- DALI					- IP66	- Tridonic
	- BT (Casambi)					- IP67	- MeanWell
		Number of channels:					
		- 1CH					
		- 2CH					
		- 4CH					
		- TW					

<u>DIMMER</u>	<u>DALI</u>	<u>4CH</u>	<u>50W</u>	/	<u>12-24</u>	<u>IP20</u>	<u>RADIUM</u>
Product category			Maximum output power in watts (W)		Operating voltage (V)		Manufacturer:
	Dimming interface:					IP protection	- Radium
	- DALI						- OSRAM
	- DMX						
		Number of channels:					
		- 1CH					
		- 2CH					
		- 4CH					
		- TW					

## LED Drivers



V



°C



max. °C



l (mm)



w (mm)



h (mm)



h



Pcs.

### LED Drivers Flat



24 DC



50/60

1	OTNA3100	DRIVER FLAT 12W/24V IP20 RADIUM	220...240	-25...+45	-25...+90	112	46	16	50000	115
2	OTNA3101	DRIVER FLAT 24W/24V IP20 RADIUM	220...240	-25...+45	-25...+90	137	50	16	50000	95
3	OTNA3102	DRIVER FLAT 36W/24V IP20 RADIUM	220...240	-25...+45	-25...+90	170	57	18	50000	65
3	OTNA3103	DRIVER FLAT 60W/24V IP20 RADIUM	220...240	-25...+45	-25...+90	170	57	18	50000	65
4	OTNA3104	DRIVER FLAT 90W/24V IP20 RADIUM	220...240	-25...+45	-25...+90	190	65	22	50000	40
4	OTNA3105	DRIVER FLAT 120W/24V IP20 RADIUM	220...240	-25...+45	-25...+90	190	65	22	50000	40
5	OTNA3106	DRIVER FLAT 250W/24V IP20 RADIUM	220...240	-25...+45	-25...+90	400	40	22	50000	40



V



°C



max. °C



l (mm)



w (mm)



h (mm)



h



Pcs.

### LED Drivers Waterproof



24 DC



50/60

1	OTNA1962	DRIVER 20W/24V IP66 OSRAM	220...240	-30...+55	70	178	43	25	50000	20
1	OTNA2420	DRIVER 40W/24V IP66 OSRAM	220...240	-30...+55	85	208	43	26	50000	20
1	OTNA2421	DRIVER 60W/24V IP66 OSRAM	220...240	-20...+55	80	208	43	26	50000	20
2	OTNA2450	DRIVER 75W/24V IP67 MeanWell	220...240	-30...+55	90	140	63	32	50000	24
2	OTNA2451	DRIVER 100W/24V IP67 MeanWell	220...240	-30...+55	90	140	63	32	50000	24
3	OTNA1960	DRIVER 100W/24V IP67 OSRAM	220...240	-30...+55	80	240	50	34	50000	10
4	OTNA2422	DRIVER 130W/24V IP67 OSRAM	220...240	-30...+55	80	220	63	37	50000	10
5	OTNA2452	DRIVER 150W/24V IP67 MeanWell	220...240	-30...+55	90	180	63	36	50000	16
5	OTNA2453	DRIVER 200W/24V IP67 MeanWell	220...240	-30...+55	90	199	63	36	50000	16
4	OTNA1961	DRIVER 250W/24V IP67 OSRAM	220...240	-30...+55	85	265	68	40	50000	10

## LED Drivers



### LED Driver Easy Connect

V

°C

max. °C

l (mm)

w (mm)

h (mm)

h

Pcs.



24 DC

50/60

1	OTNA4372	<b>DRIVER 30W DC24V</b>	180-264	-20...+45	90	123	45	19	50000	16
2	OTNA4373	<b>DRIVER 60W DC24V</b>	180-264	-20...+45	90	170	45	28	50000	12
3	OTNA4374	<b>DRIVER 120W DC24V</b>	180-264	-20...+45	85	316	40	33	50000	9
4	OTNA4375	<b>DRIVER 200W DC24V*</b>	180-264	-20...+45	90	195	67	31	30000	15

\*No connection cable pre-assembled



1



2



3



### Dimmable LED Drivers, Phasecut Dimmers

°C

max. °C

l (mm)

w (mm)

h (mm)

h

Pcs.



220-240

50/60

24 DC

One-Channel


1	OTDA4077	<b>DRIVER PHASECUT 36W/24V IP20 RADIUM</b>	1	-20...+50	-20...+90	210	43	30	50000	50
2	OTDA3026	<b>DRIVER PHASECUT 75W/24V IP20 RADIUM</b>	1	-30...+55	-30...+70	293	43	30	50000	40
3	OTDA4078	<b>DRIVER PHASECUT 150W/24V IP20 RADIUM</b>	1	-20...+50	-20...+85	352	43	30	50000	20

#### Product features:

- Dimmable with conventional leading edge and trailing edge phase dimmers
- Very high compatibility with a wide range of dimmer models
- FlickerFree in accordance with IEEE1789 standard
- Touch & DIM interface (dimming with the wall switch, without any additional accessories)
- Safety thanks to overload protection, overtemperature protection, overvoltage protection and short-circuit protection

#### Wiring diagram Radium Phasecut driver

Perfectly combinable with LED Strip WarmDIM: Dim and adjust color temperature without additional control (see [page 32](#))

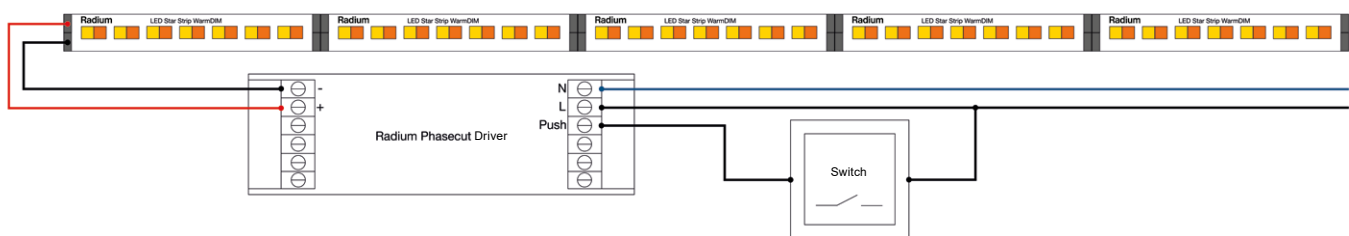



## Dimmable LED Drivers



### Dimmable LED Drivers, DALI

°C

max. °C

l (mm)

w (mm)

h (mm)

h

Pcs.




220-240

50/60

24 DC

1	OTDA4070	<b>DRIVER DALI 1CH 36W/24V IP20</b>	1	-25...+50	90	210	43	30	50000	40
2	OTDA4071	<b>DRIVER DALI 1CH 75W/24V IP20</b>	1	-25...+50	80	293	43	30	50000	30
3	OTDA4072	<b>DRIVER DALI 1CH 100W/24V IP20</b>	1	-25...+50	80	293	43	30	50000	30
4	OTDA4073	<b>DRIVER DALI 1CH 150W/24V IP20</b>	1	-25...+50	85	352	43	30	50000	20
5	OTDA4074	<b>DRIVER DALI 2CH 75W/24V IP20</b>	2	-25...+50	80	293	43	30	50000	30
6	OTDA4075	<b>DRIVER DALI 2CH 150W/24V IP20</b>	2	-25...+50	85	352	43	30	50000	20
7	OTDA4076	<b>DRIVER DALI/DMX 4CH 150W/24V IP20</b>	4	-25...+50	85	352	43	30	50000	20



### Dimmable LED Drivers Waterproof, DALI

°C

max. °C

l (mm)

w (mm)

h (mm)

h

Pcs.



50/60

24 DC

1	OTDA4107	<b>DRIVER DALI 1-4CH 100W/24V IP67 OSRAM</b>	1-4	-30...+55	85	237	69	30	50000	6
2	OTDA2461	<b>DRIVER DALI 4CH 210W/24V IP67 OSRAM</b>	1-4	-30...+55	85	330	69	37	50000	6

## Dimmable LED Drivers



### Dimmable LED Drivers Waterproof, 1-10V

V

°C

max. °C

l (mm)

w (mm)

h (mm)

h

Pcs.



24 DC

50/60

1	OTDA2424	DRIVER 1-10V 20W/24V IP66 OSRAM	220...240	-30...+55	85	178	43	25	50000	20
3	OTDA2426	DRIVER 1-10V 60W/24V IP66 OSRAM	220...240	-30...+50	90	208	43	26	50000	20
4	OTDA2427	DRIVER 1-10V 100W/24V IP67 OSRAM	220...240	-30...+55	80	240	50	34	50000	10
5	OTDA2428	DRIVER 1-10V 130W/24V IP67 OSRAM	220...240	-30...+55	80	220	63	37	50000	10
6	OTDA2429	DRIVER 1-10V 250W/24V IP67 OSRAM	220...240	-30...+55	85	265	68	40	50000	10



### Smart LED Drivers, Casambi

°C

max. °C

l (mm)

w (mm)

h (mm)

h

Pcs.



220...240

50/60

24 DC

1	OTDA2443	DRIVER BT 1CH 35W/24V IP20 TRIDONIC	1	-25...+50	80	195	43	30	50000	10
2	OTDA2444	DRIVER BT 1CH 60W/24V IP20 TRIDONIC	1	-25...+50	75	225	43	30	50000	10
3	OTDA2445	DRIVER BT 1CH 100W/24V IP20 TRIDONIC	1	-25...+50	75	295	43	30	50000	10
4	OTDA2446	DRIVER BT 1CH 150W/24V IP20 TRIDONIC	1	-25...+50	90	325	43	30	50000	10

## LED Dimmers



1

### Smart LED Dimmers, Casambi

		W	°C <sub>Ta</sub>	°C <sub>Tc</sub>	l (mm)	w (mm)	h (mm)	Pcs.
	<b>V<sub>In</sub></b>							
	12...24 DC							
	<b>CH</b>							
	4							
1	LMBA4969 CBU-PWM4-LR	144	-20...+45	75	73	30	18	1

#### Product features:

- Control of 1-4 channels
- Voltage range: 12-24V DC
- Flexible use thanks to compact design
- Ideal for RGB, RGBW and tunable white applications
- Compatible with all other Casambi devices
- Up to 100 m reception range thanks to LongRange (LR) Bluetooth technology



1



2



3

### LED Dimmers, Zigbee

		W	°C <sub>Ta</sub>	°C <sub>Tc</sub>	l (mm)	w (mm)	h (mm)	max. per channel	Pcs.
	<b>V<sub>In</sub></b>								
	12...24								
	<b>CH</b>								
	5								
1	LMZA4378 CONTROLLER ZGB UVRSL 480W/12-24V IP20	480	-20...+45	75	145	46.5	16	4	25
<b>Easy Connect</b>									
2	LMZA4376 CONTROLLER ZGB WHITE 84W/24V IP20	84	-20...+45	75	87	34	15	12	24
3	LMZA4377 CONTROLLER ZGB RGBW 84W/24V IP20	84	-20...+45	75	87	34	15	12	24

#### Product features:

- Powerful 4-in-1 Zigbee dimmer for RGB, RGBW, TW and white LED strips
- Dimmable up to 4A or 96W LED strips per channel
- For integration into smart home systems
- Local control via remote control (page 109) or via smart home system
- Control with the most popular voice controls like Alexa and Google via Zigbee bridge

# LED Dimmers



LED Dimmers, RF			<div><div>W</div></div>	<div><div>V</div><div>In</div></div>	<div><div>1</div><div>2</div><div>CH</div></div>	<div><div>1</div><div>2</div><div>3</div><div>4</div></div>	<div><div>1</div><div>2</div><div>3</div><div>4</div></div>	<div><div>1</div><div>2</div><div>3</div><div>4</div></div>	<div><div>A</div></div>	<div><div>1</div><div>2</div><div>3</div><div>4</div></div>
			W	V		l (mm)	w (mm)	h (mm)	max. per channel	Pcs.
<div><div>°C</div><div>Ta</div></div>	<div><div>°C</div><div>Tc</div></div>	<div><div>h</div></div>								
-20...+45°C	max. 75°C	50.000 h								
1	LMRA3970	<b>DIMMER RF 1CH 240W/12-24V IP20</b>	240*	12...24	1	145	46	16	10	1
2	LMRA3971	<b>DIMMER RF 4CH 480W/12-36V IP20</b>	480*	12...36	4	176	46	18	5	1

\*Note: At 24V input voltage

## Dimmer RF 1CH:

- For dimming of single colour white LED strips up to 240W power (at 24V)
- Flat, compact design

## Dimmer RF 4CH:

- RF dimmer for RGB, RGBW and white LED strips up to 5A or 120W power per channel (at 24V)

Our RF dimmers can be conveniently controlled by **Remote control**. You will find these on [page 108](#).

- Easy to connect (also several remote controls with one dimmer or one remote control with several dimmers possible)
- Fast response time
- Wide range thanks to RF technology





## Products. **Control Units.**

With the increasing demands in the course of digitization, our control units offer even more possibilities to you. They are easy to install, can be adjusted flexibly and operated intuitively. In combination with intelligent sensors and the use of daylight, you achieve maximum energy savings and use light in a targeted and needs-based manner. Make use of all of these options with Radium!







# Content

Smart Lighting Control	106
InProfile Sensors	108
Accessories	108
Compatibility of Accessories	109




# Smart Lighting Control

**Product features:**

- Can be combined with luminaires or control gears with suitable interfaces (1-10V or DALI)
- Setup of a conventional push button for control possible
- Colour control for DALI RGB or colour temperature control for tunable white light sources
- Compatible with all other Casambi devices
- Easy control via smartphone or tablet using the Casambi app
- Up to 100 m reception range thanks to LongRange (LR) Bluetooth technology



1

Casambi Control Unit											
			°C	max. °C	l (mm)	w (mm)	h (mm)	Pcs.			
<div><div><div>V<sub>In</sub></div><div>Hz</div><div></div></div><div>220...240 50/60</div><div>DALI, 1-10V</div></div>											
1	LMBA4952	<b>CBU-ASD-LR</b>	DALI	1	1	-20...+40	70	57	36	22	1



## Smart remote control

### Product features:

- Freely programmable by Casambi app
- Setting the colour temperature of tunable white light sources
- Can be used as a wall switch on the magnetic holder or as remote control
- Compatible with all other Casambi devices

**XPRESS-LR WHITE**  
LMZA4955



**XPRESS-LR BLACK**  
LMZA4954



## Dimmer for lamps

### Product features:

- Direct dimming of 230V lamps without additional components
- Very well compatible with dimmable LED lamps
- Up to 150W can be conveniently dimmed with a BCU-TED


**CBU-TED-LR**  
LMBA4953





## App

### One app – many intelligent functions

- Light sources are found by the app
- Combine luminaires in groups and control them
- Create light scenes with individual dimming and colour values, e.g. warm, bright, romantic...
- Timer function, e.g. Set alarm clock
- Mesh network: units communicate with each other, so that the Bluetooth range is expanded
- Scenes can be retrieved using the classic light switch
- Compatible with many iOS and Android devices (Bluetooth 4.0)

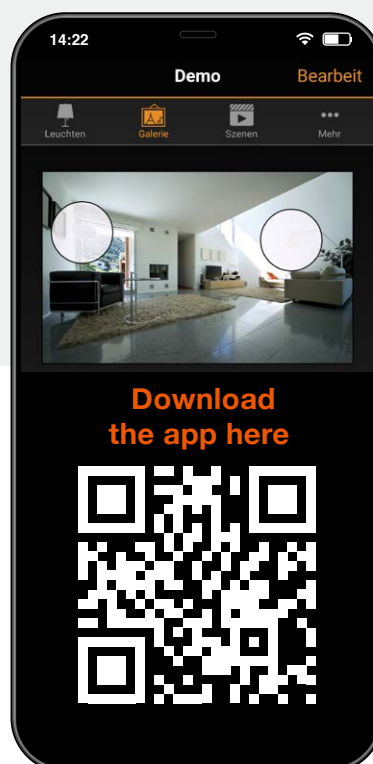

## InProfile Sensors



### Sensors

bei 24V

°C

l (mm)

w (mm)

h (mm)

Pcs.



12-24 DC 12-24 DC

One-Channel

1	LMCA3030	IN-PROFILE TOUCH&DIM SENSOR 72W/12-24V	3	72	-30...+55	50	8	10	30
2	LMCA3031	IN-PROFILE MOTION SENSOR 72W/12-24V	3	72	-30...+55	50	11	12	30
3	LMCA3032	IN-PROFILE DOOR SENSOR 96W/12-24V	4	96	-30...+55	50	11	8	30
4	LMCA3033	IN-PROFILE WINK SENSOR 96W/12-24V	4	96	-30...+55	50	11	9	30

### Product features:

- Versatile sensors, some with dimming function
- Compact design for installation in Radium aluminum profiles
- Easy dimming and switching of 12-24V LED strips
- Up to 96W per sensor/dimmer at 24V

### Functions

1	IN-PROFILE TOUCH&DIM SENSOR 72W/12-24V	Dim light by tapping the profile cover
2	IN-PROFILE MOTION SENSOR 72W/12-24V	Switch on light by motion detection
3	IN-PROFILE DOOR SENSOR 96W/12-24V	Switch on light by opening the (cabinet) door thanks to optical door contact sensor
4	IN-PROFILE WINK SENSOR 96W/12-24V	Switching light by movement over the profile cover



### Casambi Accessories

l (mm)

w (mm)

h (mm)

Pcs.

1	LMZA4955	XPRESS-LR WHITE	90	90	12	1
2	LMZA4954	XPRESS-LR BLACK	90	90	12	1



### RF Accessories

l (mm)

w (mm)

h (mm)

Pcs.

1	LMZA3972	REMOTE RF WHITE 4Z	150	39	11	1
2	LMZA3973	REMOTE RF RGB 4Z	120	55	17	1
3	LMZA3974	REMOTE RF DOT 1Z WHITE	32	32	12	1
4	LMZA3975	REMOTE RF DOT 1Z BLACK	32	32	12	1

Accessories for Control Units



Zigbee Accessories		l (mm)	w (mm)	h (mm)	Pcs.
1	LMZA4535 REMOTE ZGB WHITE 4ZONE	150	39	12	9
2	LMZA4536 REMOTE ZGB RGBW 4ZONE	136	39	11	9
3	LMZA4537 REMOTE ZGB DOT 1ZONE	39	39	15	16

Compatibility of Accessories

Product family


Page		DIMMER RF 1CH 240W/ 12-24V IP20	DIMMER RF 4CH 480W/ 12-36V IP20	CONTROLLER ZGB WHITE 84W/24V IP20	CONTROLLER ZGB RGBW 84W/24V IP20	CONTROLLER ZGB UV/RSL 480W/12-24V IP20	CBU-ASD-LR
	<div>SMART Blue Remote LMZA4955 ○ / LMZA4954 ●</div> <div></div> <div></div>						x
	<div>REMOTE RF WHITE 4Z LMZA3972</div> <div></div>	x					
	<div>REMOTE RF RGB 4Z LMZA3973</div> <div></div>		x				
	<div>REMOTE RF DOT 1Z LMZA3974 ○ / LMZA3975 ●</div> <div></div> <div></div>	x					
	<div>REMOTE ZGB WHITE 4ZONE LMZA4535</div> <div></div>			x		x	
	<div>REMOTE ZGB RGBW 4ZONE LMZA4536</div> <div></div>				x	x	
	<div>REMOTE ZGB DOT 1ZONE LMZA4537</div> <div></div>			x		x	

# Overview of Important Information.

## Technical Information.

### Electrical information

Radium LED Strips are suitable for operation with 24V DC voltage only. Suitable control gears can be found on [pages 96–103](#). Depending on the LED strip, one or two supply lines per module are pre-assembled at the factory. The cables of the supply lines can be extended on site.

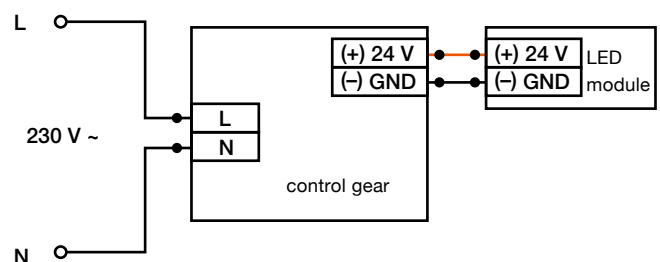

### Cable lengths

The LED strips must not be operated at any random distance from the control gear. The maximum cable lengths depend on the device and are published in the technical data sheets of the control gear. When long cable lengths and/or high currents occur, sufficiently large cable cross sections must be used.

### ESD protection

LED strips can be damaged by electrostatic discharge (ESD), up to a total failure of the LEDs. If the ESD damage is less serious, the LEDs remain conductive and light up, but darken quickly. To avoid ESD damage, LED strips must be stored in an ESD-protected environment and processed and assembled with appropriate protection. Therefore at our professional customising LED Strip assemblies we work in areas with special ESD protection exclusively.

### Assembly

All LED Strips are equipped with 3M double-sided adhesive tape. After removing the protective film, the LED module can be glued to clean and smooth surfaces. Optionally, the modules can be installed directly in suitable aluminum profiles (see [pages 66–89](#)). Make sure you have a clean surface that must be free of grease, oil, silicone and dirt particles.

## IP Protection

In order to protect our LED Strips from environmental influences, all waterproof Essence Strips are enveloped in a silicone tube and potted at both ends. Our waterproof Star Strips are encapsulated with silicone. IP protection indicates the suitability of electrical equipment for various environmental conditions.

### Degree of protection against dust and foreign bodies

- 0 Not protected
- 1 Protected against solid foreign bodies Ø
- 2 Protected against solid foreign bodies  $\geq 12.5 \text{ mm } \varnothing$
- 3 Protected against solid foreign bodies  $\geq 2.5 \text{ mm } \varnothing$
- 4 Protected against solid foreign bodies  $\geq 1 \text{ mm } \varnothing$
- 5 Protected from dust
- 6 Dustproof

### Example: IP67

Dustproof, protected against temporary immersion in water

### Degree of protection against water

- 0 Not protected
- 1 Protected against dripping water
- 2 Protected against dripping water if the housing is inclined
- 3 Protected against water spray
- 4 Protected against splash water
- 5 Protected against water jets
- 6 Protected against strong water jets
- 7 Protected against temporary immersion in water
- 8 Protected against permanent immersion in water
- 9 Protection against water during high pressure/steam jet cleaning

## Cooling

All Radium LED Strips with a power of  $> 15 \text{ W/m}$  as well as all RGB strips must not be operated without heat sink. Radium aluminum profiles are recommended for optimal cooling (see [page 66–89](#)). If the modules are not operated with approved Radium accessories, Radium cannot accept any warranty claims.



### Maximum operable length

The specified maximum operable length of the LED Strips requires an input voltage of 24V at the LED Strip. If the voltage actually fed in is lower due to a too long supply line, the maximum operable length might be proportionately shorter.



### Guarantee

Radium LED products are known for high quality engineering, professional thermal management, the use of high quality components and the use of systematic quality assurance measures. For LED Strips that correspond to the product and application specifications given by Radium, e.g. data sheets, application notes or compatibility lists, Radium provides a guarantee up to 5 years. [www.radium.de/guarantee](http://www.radium.de/guarantee)



### Star

Optimal function for professional use.  
All Star types offer a longer service life and very good efficiency.



### Essence

All Essence types offer pure functionality at the best price.






### Easy Connect

Plug-in system for easy installation.



# The Meaning of the Symbols.

## Pictograms.

	Power consumption (W)		Energy label
	Input voltage (V)		Material
	Output voltage (V)		Colour temperature ● 2700/3000 K (warm white) ○ ~ 4000 K (neutral white) ● ~ 6500 K (cool white) ● super warm white–neutral white ● warm white–cool white ● RGB/RGBW
	Voltage (V)		
	Amperage (A)		
	Permissible ambient temperature (°C)		Power consumption per meter (W/m)
	Permissible operating temperature (°C)		Luminous flux per meter (lm/m)
	Mains frequency (Hz)		LEDs per meter
	Dimensions length / width / height (mm)		Smallest divisible unit of an LED Strip (mm)
	Lifetime (h)		Maximum operable length for the LED Strip with one feed-in connection
	Protection class I		Distance (pitch) from centre LED to centre LED (mm)
	Protection class II		Number of contact points of an LED Strip
	Protection class III		Width of LED Strip (mm)
	Shipping unit in pieces (pcs.)		Cable length (mm)

	Interface profile to cover		Size XSMALL for aluminum profiles
	Interface profile to mounting bracket		Size SMALL for aluminum profiles
	Profile shape U (add-on/attachment profile)		Size MEDIUM for aluminum profiles
	Profile shape U FLAT (add-on/attachment profile flat)		DIM interface
	Profile shape WING (installation profile)		Number of channels of a control gear
	Profile shape CORNER (corner profile)		For Multi-Channel: Max. number of addresses of a control gear
	1 meter length for aluminum profiles and covers		For broadcast: Max. number of control gear
	2 meters length for aluminum profiles and covers		Number of poles/leads
	3 meters length for aluminum profiles and covers		Number of outputs
	5 meters length for LED Strips		Cable cross section (mm <sup>2</sup> )
	10 meters length for LED Strips, aluminum profiles and covers		Color
	20 meters length for covers		
	30 meters length for LED Strips		
	50 meters length for LED Strips		
	Individual length for LED Strips		

Space for your thoughts.

# Notes.

[illegible]

This image shows a single page of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page, leaving small margins at the top and bottom. There are no vertical margin lines, no text, and no other markings on the page. It appears to be a standard piece of notebook paper.

**Radium Lampenwerk GmbH**

Dr.-Eugen-Kersting-Str. 6  
51688 Wipperfürth  
Germany

Telephone +49 (0) 2267 811  
Fax +49 (0) 2267 81353

radium@radium.de  
**www.radium.de**