


Tubular Lamp, clear

T 10W/240/C/E14

Radium

Product Datasheet Date: 01.04.2026

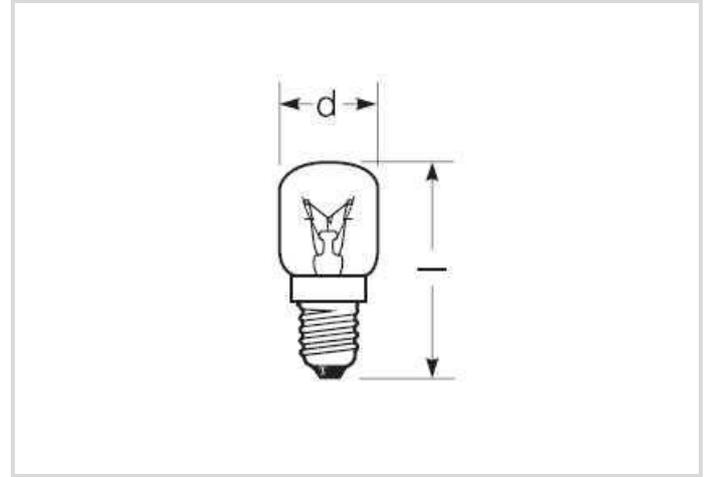

E



30



1 000h



Dimmbar

General Data

Artikel Nr.	12100206
Bestellzeichen	T 10W/240/C/E14
EAN-Faltschachtel	4008597002069
Versandeinheit in Stk.	100
EAN Umkarton (Versandeinheit)	4008597502064
Brutto-Gewicht Versandeinheit in kg	1.561
Länge Versandeinheit in m	0.29
Breite Versandeinheit in m	0.15
Höhe Versandeinheit in m	0.14
Product weight	13 g
Produktstatus	● Inaktiv

Electric Parameters

Wattage	10.0 W
Lamp nominal wattage	6 W
Power factor	1.00
Lamp voltage	143-240 V
Mains voltage	240 V

Electric Parameters

Nominal current	42 mA
Nominal current (mA)	42 mA
dimnable	Ja

Light Application Parameters

Luminous flux	30 lm
Rated lamp luminous flux	30 lm
Efficacy	3 lm/W
Color rendering index	100

Service Life

Average life	1000 h
Mean service life	1000 h

Specification

Energylabel notice	old label, no EPREL registration, no EU data sheet
Energylabel (E -> A++)	E
Diameter	25 mm
Length	57 mm
Total length max.	57 mm
Burning position	any
Mercury content	0.0 mg
Model	Clear
Base	E14

Notes on Operation

Burning position	any
------------------	-----

Information especially for EPREL

Energylabel notice	old label, no EPREL registration, no EU data sheet
--------------------	--

Miscellaneous

EU Directive	DIM1
--------------	------

Notes

Tubular Lamp, clear

T 10W/240/C/E14

Radium

Mini incandescent lamp, base E14. Special lamps are not suitable for general lighting. Single lamp life (B2) critical for application.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optional field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Tubular Lamp, clear

T 10W/240/C/E14

Radium

Sockelübersicht




E14
IEC/EN 60061-1
sheet 7004-23-6

Spektrale Strahlungsverteilung


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

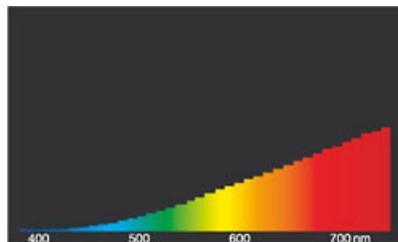


light of incandescent lamps

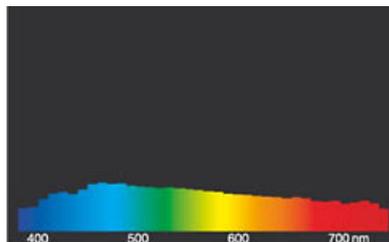

daylight(D 65)

Besonderheiten



Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.