
LED Star Tube High Output
RL-T8 58 HO 840/G13 HF

Product Datasheet Date: 10.11.2026



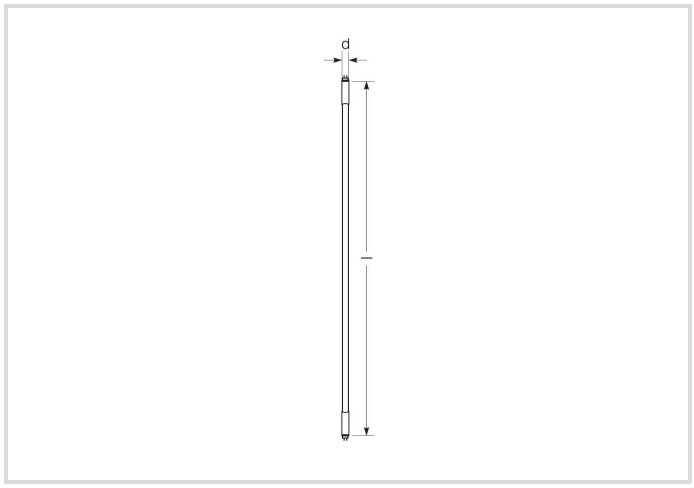

D	23	3700	4000K	60 000h

General Data

Artikel Nr.	43920139
Bestellzeichen	RL-T8 58 HO 840/G13 HF
EAN-Faltschachtel	4008597201394
Versandeinheit in Stk.	10
EAN Umkarton (Versandeinheit)	4008597601392
Brutto-Gewicht Versandeinheit in kg	3.544
Länge Versandeinheit in m	1.572
Breite Versandeinheit in m	0.21
Höhe Versandeinheit in m	0.115
Product weight	248 g
Produktstatus	Aktiv

Electric Parameters

Wattage	23.0 W
Nominal power	23.0 W
Weighted energy consumption in 1000 hours	23 kWh
Lamp power	23.0-23.0 W
Power factor	> 0.9

LED Star Tube High Output
RL-T8 58 HO 840/G13 HF

Radium

Electric Parameters

Power factor	0,9
Nominal voltage	40-70 V
Voltage type	AC
Nominal current	380-380 mA
Nominal current (mA)	380 mA
Inrush current	22 A
dimmable	Nein

Light Application Parameters

Luminous flux	3700 lm
Rated lamp luminous flux	3700 lm
Luminous flux	3700 lm
Lumen-Output mark	HO
Beam angle	190 °
Efficacy / Luminous efficiency	161 lm/W
Total mains efficacy	149 lm/W
Light colour	coolwhite
Color temperature	4000 K
Color coordinate X	0,381
Color coordinate Y	0,379
Colour rendering index CRI	80-89
Color rendering index nominal	83
Color Stability	≤ 5 sdcm

Service Life

Average life	60000 h
Tc Temperature max.	78 °C
Mean service life	60000 h
Lifetime L70B50	60000 h
max. temperature at Tc -point for nominal life with ECG	54 °C
Life L70 @ Tc max. with ECG	22000 h
Tc max. with ECG	78 °C
No. switching cycles	200000
Lamp survival factor at 6000h	≥ 0.90
Early failure rate at 1000h	≤ 5.0 %
Guarantee	5 years

LED Star Tube High Output
RL-T8 58 HO 840/G13 HF

Radium

Specification

Energylabel notice	current label, with EPREL registration
Energylabel (G -> A)	D
Diameter	27,8 mm
Tube diameter	26 mm
Length	1500 mm
Length	1500 mm
Burning position	any
Mercury content	0.0 mg
Shatterproof	Ja
Photobiological safety according to EN 62471	RG0
Lamp shape	Tube, double-ended
Base	G13
Colour	White

Notes on Operation

IP Class (Room/Ceiling)	IP 20
Burning position	any
Mode of operation	ECG
Range of storage temperature	-20…+80 °C
Ambient temperatures	-20 … +45 °C
Tc Temperature max.	78 °C
Tc max. with ECG	78 °C
max. temperature at Tc -point for nominal life with ECG	54 °C
With movement sensor	Nein

Information especially for EPREL

Energylabel notice	current label, with EPREL registration
Lighting technology	LED
Color tunable light source	Nein
Type of color temperature	SINGLE_VALUE
Color stability MacAdams EPREL	5
Displacement factor EPREL	0,9
Life factor EPREL	0,9
Lumen maintenance EPREL	0,7
EPREL ID number	541681

LED Star Tube High Output
RL-T8 58 HO 840/G13 HF

Radium

Miscellaneous


Similar products	43920140, 43720060, 43920133, 43720052, 43719852

Notes

T8 tubular LED lamp for exchange with fluorescent lamps, neutral white light, glass bulb, non-dim, base G13. Operation with suitable ECG only.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).


Sockelübersicht




G13
IEC/EN 60061-1
sheet 7004-51-8

Spektrale Strahlungsverteilung

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.
The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.
White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin.
Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

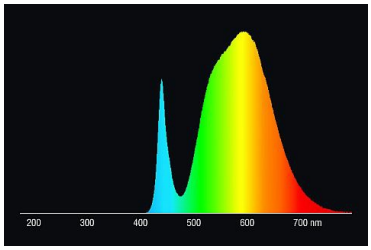

LED retrofit tube lamps for fluorescent lamps 4000K

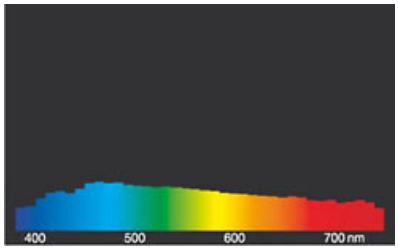

daylight(D 65)

Besonderheiten



Allgemeine Hinweise

Please note the installation instructions when replacing fluorescent lamps with LED tubes. Some LED lamp types are only suitable for 1: 1 replacement at the reespective burning position: with CCG by using the enclosed starter, with ECG with compatible control gear. Others can be operated directly on 230V (conversion of the luminaire), others again can 'do' CCG as well as 230V or all 3 variations. Neo tubes need an external LED driver (replacement of the control gear). LED Neo tubes are dimmable, all other LED tubes are not dimmable.

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.
® = Registered trademark

LED Star Tube High Output
RL-T8 58 HO 840/G13 HF

Radium

Subject to change without notice. Errors and omissions excepted.

Sicherheitshinweise
To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.