
# **Halogen pin base lamp, clear** RJH-PIN 35W/23O/C/XE/G9



Product Datasheet Date: 05.11.2025





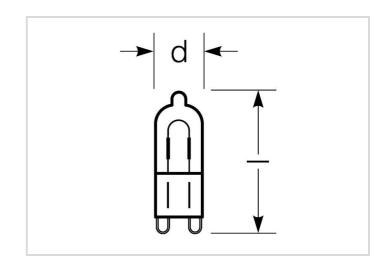





2800K



460

2 000h

## **General Data**

Artikel Nr.	22319460
Bestellzeichen	RJH-PIN 35W/230/C/XE/G9
EAN-Faltschachtel	4008597194603
Versandeinheit in Stk.	20
EAN Umkarton (Versandeinheit)	4008597594601
Brutto-Gewicht Versandeinheit in kg	0.126
Länge Versandeinheit in m	0.144
Breite Versandeinheit in m	0.055
Höhe Versandeinheit in m	0.118
Product weight	3 g
Produktstatus	Inaktiv

# **Electric Parameters**

Wattage	35.0 W
Weighted energy consumption in 1000 hours	35 kWh
Lamp voltage	230-230 V

# Halogen pin base lamp, clear

RJH-PIN 35W/230/C/XE/G9



# **Light Application Parameters**

Luminous flux	460 lm
Rated lamp luminous flux	460 lm
Efficacy	13 lm/W
Colour temperature	2800 K
Color coordinate X	0,452
Color coordinate Y	0,409

#### **Service Life**

Average life	2000 h	
No. switching cycles	50000	

### **Specification**

Energylabel notice	current label, with EPREL registration
Energylabel (G -> A)	G
Diameter	14 mm
Length	43 mm
Total length max.	43 mm
Lamp shape	Tube, single-ended
Model	Clear
Base	G9

# Information especially for EPREL

Energylabel notice	current label, with EPREL registration
Lighting technology	HL
Mains/Non mains connectable	MLS
Directional or non-directional light	NDLS
Type of color temperature	SINGLE_VALUE
EPREL ID number	541029

#### Miscellaneous

EU-date of phase-out	01.09.2023
Similar products	22319462, 22319463, 43419829, 43719746, 43420569

#### **Notes**

Mains voltage halogen lamp clear, pin shape, 230V, base G9, dimmable steplessly, 2000 h mean service life

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been

# Halogen pin base lamp, clear

RJH-PIN 35W/230/C/XE/G9




determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

# Halogen pin base lamp, clear

RJH-PIN 35W/230/C/XE/G9



#### Sockelübersicht




#### Spektrale Strahlungsverteilung


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament. The addition of halogens to the filling gas enhance the efficiency and prevents blackening. Further increase in effiency can be achieved by adding Xenon and/or IRC-coating.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.



light of incandescent lamps



daylight(D 65)

#### Allgemeine Hinweise

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.