

LED Star T8-RetroFit universal

RL-T8 58 S 20W/830/G13 UN

Radium

Product Datasheet Date: 20.01.2026



A++



[D]



20



2800



3000K



50 000h



50 000h

General Data

Article No.	43518438
Code	RL-T8 58 S 830/G13 UN
Product EAN	4008597184383
Box quantity (pcs.)	10
EAN Box	4008597484384
Gross weight of box in kg	4.224
Length of box in m	1.65
Width of box in m	0.21
Height of box in m	0.107
Product weight	297 g
Product status	● Inactive

Electric Parameters

Wattage	20.0 W
Nominal power	20.0 W
Weighted energy consumption in 1000 hours	20 kWh
Lamp power	20.0-20.0 W
Power factor	> 0.90

LED Star T8-RetroFit universal

RL-T8 58 S 20W/830/G13 UN

Radium

Electric Parameters

Nominal voltage	220-240 V
Mains Voltage	220 - 240 V
Voltage type	AC
Nominal current	100-100 mA
Nominal current (mA)	100 mA
max. no. of lamps at 10A automatic fuse	43
max. no. of lamps at 16A automatic fuse	69
dimmable	No

Light Application Parameters

Luminous flux	2800 lm
Rated lamp luminous flux	2800 lm
Luminous flux in 90°-sector	2800 lm lm
Luminous flux in 120°-sector	2800 lm lm
Beam angle	160 °
Efficacy	140 lm/W
Total mains efficacy	140 lm/W
Color temperature	3000 K
Color rendering index	≥ 80
Color rendering index nominal	80-89
Color Stability	≤ 5 sdcM

Service Life

Average life	50000 h
Mean service life	50000 h
Lifetime L70B50	50000 h
No. switching cycles	200000
Lamp survival factor at 6000h	≥ 0.90
Early failure rate at 1000h	≤ 5.0 %
Guarantee	5 years

Specification

Energylabel notice	old label, no EPREL registration, no EU data sheet
Energylabel (G -> A)	[D]
Energylabel (E -> A++)	A++
Diameter	28 mm

Specification

Tube diameter	26 mm
Length	1500 mm
Length	1500 mm
Burning position	any
Mercury content	0.0 mg
Material	Glass
Shatterproof	Yes
Lamp shape	Tube, double-ended
Base	G13
Colour	White

Notes on Operation

Degree of protection (IP)	IP20
Burning position	any
Mode of operation	ECG, CCG, 230V
Range of storage temperature	-20...+80 °C
Ambient temperatures	-20...+50 °C

Information especially for EPREL

Energylabel notice	old label, no EPREL registration, no EU data sheet
Lighting technology	LED
Color tunable light source	No
Type of color temperature	SINGLE_VALUE
Color stability MacAdams EPREL	5
EPREL ID number	874485

Miscellaneous

Similar products	43920133, 43920132, 43719852, 31118998, 31119987
------------------	--------------------------------------------------

Notes

T8 LED lamp for exchange with fluorescent lamps, warm white light, glass bulb, non-dim, base G13. Operation with CCG or at 230V.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Base

G13


IEC/EN 60061-1

LED Star T8-RetroFit universal

RL-T8 58 S 20W/830/G13 UN


Radium

sheet 7004-51-8




Spectrum

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K. The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering. White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin. Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/km) per 10nm.

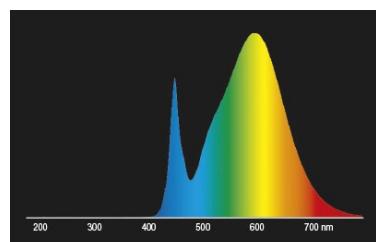

LED retrofit tube lamps for fluorescent lamps 3000K

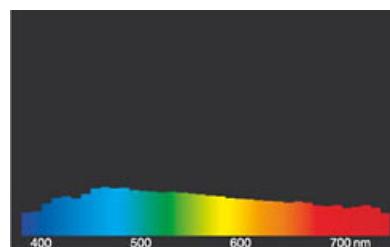

daylight(D 65)

Special features



General notes

Please note the installation instructions when replacing fluorescent lamps with LED tubes. Some LED lamp types are only suitable for 1:1 replacement at the respective burning position: with CCG by using the enclosed starter, with ECG with compatible control gear. Others can be operated directly on 230V (conversion of the luminaire), others again can 'do' CCG as well as 230V or all 3 variations. Neo tubes need an external LED driver (replacement of the control gear). LED Neo tubes are dimmable, all other LED tubes are not dimmable.

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

Safety instructions

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.