



[D]

41

6000

4000K

50 000h

5  
YEARS  
GUARANTEE

## General Data

Article No.	43819751
Code	RL-HRL125 840/E40 EM
Product EAN	4008597197512
Box quantity (pcs.)	6
EAN Box	4008597597510
Gross weight of box in kg	3.638
Length of box in m	0.335
Width of box in m	0.23
Height of box in m	0.275
Product weight	470 g
Product status	<span style="color: green;">●</span> Active

## Electric Parameters

Wattage	41.0 W
Nominal power	41.0 W
Weighted energy consumption in 1000 hours	41 kWh
Lamp power	41.0-41.0 W
Power factor	≥ 0.9

## Electric Parameters

Nominal voltage	220-240 V
Voltage type	AC
Nominal current	190-190 mA
Nominal current (mA)	190 mA
Total harmonic distortion	0.2
max. no. of lamps at 10A automatic fuse	33
max. no. of lamps at 16A automatic fuse	52
dimnable	No

## Light Application Parameters

Luminous flux	6000 lm
Rated lamp luminous flux	6000 lm
Beam angle	360 °
Efficacy	146 lm/W
Total mains efficacy	146 lm/W
Light colour	coolwhite
Color temperature	4000 K
Color coordinate X	0,382
Color coordinate Y	0.380
Color rendering index	≥ 80
Color rendering index nominal	80
Color Stability	≤ 6 sdc <sub>m</sub>

## Service Life

Average life	50000 h
T <sub>c</sub> Temperature max.	105 °C
Mean service life	50000 h
No. switching cycles	[100000]
Lamp survival factor at 6000h	≥ 0.90
Early failure rate at 1000h	≤ 1.0 %
Guarantee	5 years

## Specification

Energylabel notice	current label, with EPREL registration
Energylabel (G -> A)	[D]
Diameter	80 mm

## Specification

Length	204 mm
Length	204 mm
Burning position	any
Mercury content	0.0 mg
Material	Glass
Photobiological safety according to EN 62471	RG0
Lamp shape	Tube, single-ended
Base	E40
Colour	White

## Notes on Operation

Degree of protection (IP)	IP65
Burning position	any
Mode of operation	CCG, 230V
Ambient temperatures	-20 ... +50 °C
Tc Temperature max.	105 °C
With movement sensor	No

## Information especially for EPREL

Energylabel notice	current label, with EPREL registration
Lighting technology	LED
Mains/Non mains connectable	MLS
Directional or non-directional light	NDLS
Color tunable light source	No
Type of color temperature	SINGLE_VALUE
Color stability MacAdams EPREL	6
Displacement factor EPREL	0,9
Life factor EPREL	0,9
Lumen maintenance EPREL	0,7
Flicker	1.0
Stroboscopic effect	0.40
EPREL ID number	541611

## Notes

LED lamp for exchange with mercury lamps (HPM), non-dim, base E40. Operation with ballast (1:1 replacement) or without (&#61; with 230V). No UV or IR.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

## Base



E40  
IEC/EN 60061-1  
sheet 7004-24-6


## Spectrum

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

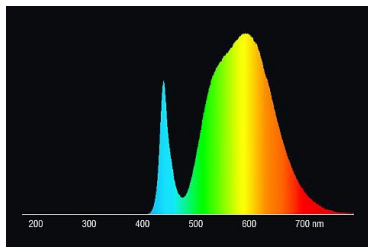


LED retrofit lamps 4000K



daylight(D 65)

## Special features



## General notes

When replacing mercury vapor lamps HRL with LED lamps, we recommend replacement at the respective light point with operation at mains voltage directly (disconnect ballast, for lamps with article no. 426...), newer generations may also be replaced 1:1 (ballast remains in luminaire, lamps with article no. 43...) An ambient temperature of the lamp of 60 ° C inside the luminaire must not be exceeded. Outdoor use is permitted (IP65).

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

## Safety instructions

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated

**LED HPM-Retrofit**  
RL-HRL125 840/E40

**Radium**

with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.