

# High pressure sodium lamp

RNP-E/LR 100W/S/230/E40

Radium

Product Datasheet Date: 06.09.2025





F



10100



2000K




36 000h



Dimmable

## General Data

Article No.	34414714
Code	RNP-E/LR 100W/S/230/E40
Product EAN	4008597147142
Box quantitiy (pcs.)	12
EAN Box	4008597447143
Gross weight of box in kg	1.677
Length of box in m	0.38
Width of box in m	0.3
Height of box in m	0.203
Product weight	80 g
Product status	 Active

## Electric Parameters

Wattage	103.6 W
Weighted energy consumption in 1000 hours	104 kWh
Lamp voltage	100 V
Ignition voltage	3.3 up to 5.0
Lamp's nominal current	1.2 A

Electric Parameters

Nominal choke current	1.2 A
Compensation capacitor for 50Hz operation	12 µF
Fuse	Daelay-action; min. double nominal current
dimmable	Yes

Light Application Parameters

Luminous flux	10100 lm
Rated lamp luminous flux	10100 lm
Efficacy	97 lm/W
Total mains efficacy	90 lm/W
Colour temperature	2000 K
Color coordinate X	0,535
Color coordinate Y	0.420
Color rendering index	< 25
Lumen maintenance at 2000h	0.94
Lumen maintenance at 4000h	0.92
Lumen maintenance at 6000h	0.90
Lumen maintenance at 8000h	0.89
Lumen maintenance at 12000h	0.88
Lumen maintenance at 16000h	0.87
Lumen maintenance at 20000h	0.86

Service Life

Average life	36000 h
B5 - Service life 5% failures	16000 h
B10 - Service life 10% failures	20000 h
Lamp survival factor at 2000h	0.99
Lamp survival factor at 4000h	0.98
Lamp survival factor at 6000h	[0.98]
Lamp survival factor at 8000h	0.97
Lamp survival factor at 12000h	0.96
Lamp survival factor at 16000h	0.95
Lamp survival factor at 20000h	0.90

# High pressure sodium lamp

## RNP-E/LR 100W/S/230/E40

# Radium

### Specification

Energylabel notice	current label, with EPREL registration
Energylabel (G -> A)	F
Diameter	76 mm
Length max.	183 mm
Total length max.	183 mm
Burning position	h180
Mercury content	19.0 mg
Lamp shape	Ellipsoid
Model	Opal
Base	E40

### Notes on Operation

Burning position	h180
------------------	------

### Information especially for EPREL

Energylabel notice	current label, with EPREL registration
EPREL ID number	541459

### Miscellaneous

Similar products	34414713
------------------	----------

### Notes

High pressure sodium lamp long run (4Y), elliptical bulb coated, base E27. Operation with ballast and ignitor.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage. The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

#### Base



E40  
IEC/EN 60061-1  
sheet 7004-24-6

#### Spectrum

Natural daylight is a mixture of direct sunlight and the light of the sky. Therefore, its spectral composition changes permanently due to the changing time of day. The standardised light classification D65 corresponds to a daylight with a colour temperature of approximately 6500 K. Every discharge lamp type has got an individual spectral power distribution according to its chemical filling. From this result important properties light colour or colour rendering. Sodium vapour lamps are very economic, due to the yellow light RNP lamps have got a high luminous efficiency but only

# High pressure sodium lamp


RNP-E/LR 100W/S/230/E40

**Radium**


modest colour rendering.

After the lamp start a high pressure sodium lamp needs about 6-10 minutes time to reach its full luminous flux.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

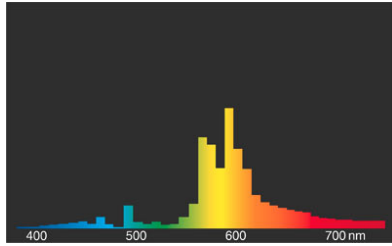


RNP Standard/Super

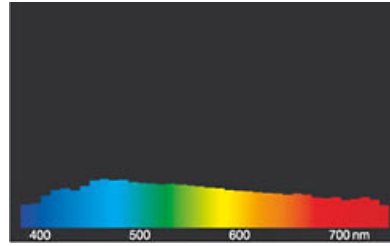

daylight(D 65)

## Special features



## General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.