

LED T8 NEO 18 840/G13



Product Datasheet Date: 04.11.2025



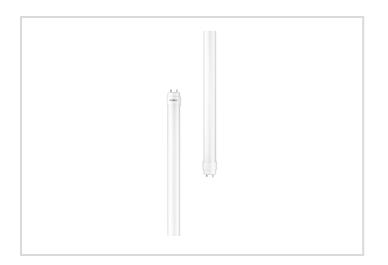

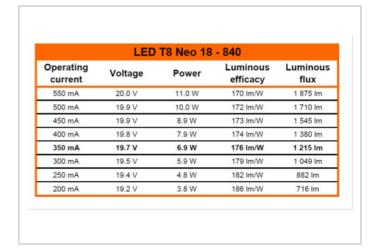











6.9

4000K

70 000h

Dimmable

### **General Data**

Article No.	43719848
Code	RL-T8 18 NEO 840/G13 DC
Product EAN	4008597198489
Box quantitiy (pcs.)	25
EAN Box	4008597498480
Gross weight of box in kg	3.2
Length of box in m	0.67
Width of box in m	0.21
Height of box in m	0.2
Product weight	90 g
Product status	Active

### **Electric Parameters**

Wattage	6.9 W
Nominal power	6.9 W
Weighted energy consumption in 1000 hours	7 kWh
Lamp power	3.8-11.0 W
Nominal voltage	18.5-20.5 V

LED T8 NEO 18 840/G13



## **Electric Parameters**

Voltage type	DC
Nominal current	200-550 mA
Nominal current (mA)	350 mA
dimmable	Yes

# **Light Application Parameters**

Rated luminous flux according to IEC 62612	1215 lm
Luminous flux	716-1875 lm
max. luminous flux at	550 mA
Beam angle	160 °
Efficacy	176 lm/W
Total mains efficacy	163 lm/W
Light colour	coolwhite
Color temperature	4000 K
Color coordinate X	0.380
Color coordinate Y	0.380
Color rendering index	> 80
Color Stability	≤ 5 sdcm

### **Service Life**

Average life	70000 h
Tc Temperature max.	70 °C
Mean service life	100000 h
Life L70B10	100000 h
Life L80B10	70000 h
No. switching cycles	>1.000.000
Guarantee	5 years

# **Specification**

Energylabel notice	current label, with EPREL registration
Energylabel (G -> A)	С
Diameter	28.5 mm
Tube diameter	25.4 mm
Length	600 mm
Length	600 mm
Burning position	any

LED T8 NEO 18 840/G13



### **Specification**

Mercury content	0.0 mg
Material	Glass
Shatterproof	Yes
Lamp shape	Tube, double-ended
Base	G13
Colour	White

## **Notes on Operation**

Degree of protection (IP)	IP20
Burning position	any
Mode of operation	DC
Range of storage temperature	-20 +60°C
Ambient temperatures	-20 +50°C
Tc Temperature max.	70 °C

### Information especially for EPREL

Energylabel notice	current label, with EPREL registration	
Lighting technology	LED	
Mains/Non mains connectable	NMLS	
Directional or non-directional light	NDLS	
Color tunable light source	No	
Type of color temperature	SINGLE_VALUE	
Color stability MacAdams EPREL	5	
Displacement factor EPREL	1	
EPREL ID number	1083282	

### Miscellaneous

Similar products	43719849	

#### **Notes**

T8 tubular DC LED lamp for external drivers, dimmable with suitable driver, neutral white light, glass bulb, base G13. Exchange for fluorescent lamps.

 $\label{eq:please} \textit{Please, refer to} \ \underline{\textit{www.radium.de/recycling}} \ \textit{for notes on disposal of burned-out lamps as well as lamp breakage}.$ 

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Base G13

IEC/EN 60061-1

LED T8 NEO 18 840/G13






#### Spectrum


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin. Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.



LED-NEO-Tubes 4000K, Replacements for fluorescent lamps



daylight(D 65)

#### Special features









#### General notes

Please note the installation instructions when replacing fluorescent lamps with LED tubes. Some LED lamp types are only suitable for 1: 1 replacement at the reespective burning position: with CCG by using the enclosed starter, with ECG with compatible control gear. Others can be operated directly on 230V (conversion of the luminaire), others again can 'do' CCG as well as 230V or all 3 variations. Neo tubes need an external LED driver (replacement of the control gear). LED Neo tubes are dimmable, all other LED tubes are not dimmable.

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

#### Safety instructions

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.