


LED Strip operational gear

DRIVER 200W DC 24V

Radium

Product Datasheet Date: 22.09.2025

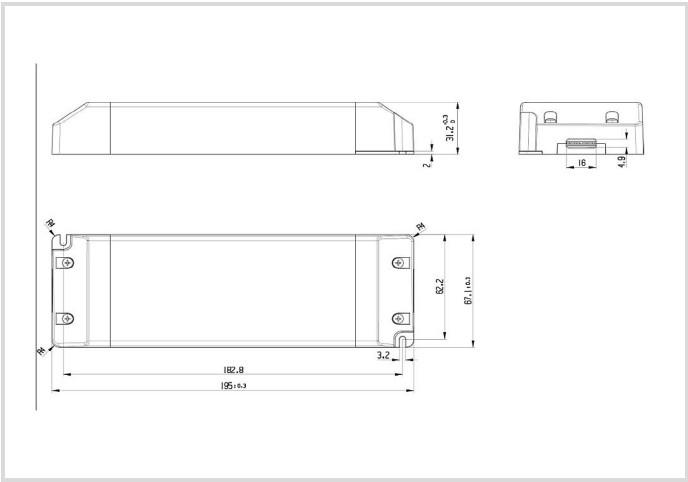

General Data

Article No.	OTNA4375
Code	DRIVER 200W DC 24V
Product EAN	4003556012219
Box quantitiy (pcs.)	15
EAN Box	4003556412217
Gross weight of box in kg	7.234
Length of box in m	0.175
Width of box in m	0.23
Height of box in m	0.205
Product weight	443 g
Product status	<div></div> Active

Electric Parameters

Output power	0-200.0 W
Power factor	0.9
Input voltage AC (range)	180-264 V
Output Voltage	24 V
Output voltage	22.8-25.2 V

Electric Parameters

Standby consumption	0.4 W
Inrush current	90 A
Input current	1.1 A
Output current	0-8330 mA
Mains frequency	50 / 60 Hz
Suitable for DC-voltage (primary side)	No
max. no. of lamps at 10A automatic fuse	2
max. no. of lamps at 16A automatic fuse	4
dimmable	No
Dimming with push-button	No

Service Life

Service life	30000 h
Tc Temperature max.	90 °C
Guarantee	5 years

Specification

Length	195 mm
Height max.	32 mm
Width	68 mm
Model	Static

Notes on Operation

Degree of protection (IP)	IP20
Range of storage temperature	-40...+85 °C
Ambient temperatures	-20...+45 °C
Tc Temperature max.	90 °C
max. relative air humidity	90 %

Information especially for EPREL

Standby consumption	0.4 W
---------------------	-------

Notes

Compact constant voltage supply 24V for operation of LED modules, not dimmable, for indoor applications

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains

LED Strip operational gear

DRIVER 200W DC 24V

Radium

(frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

LED Strip operational gear

DRIVER 200W DC 24V

Radium

Special features



General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.