

Halogen lamp for stage lighting

RJH-TS 1000W/240/C/R7S

Radium

Product Datasheet Date: 30.05.2026



C

G

22000

2 000h

Gradable

General Data

Code Radium	22315783
Désignation	RJH-TS 1000W/240/C/R7S
EAN 10 (unité)	4008597157837
Unité de transport (pièces)	12
EAN 40 (carton)	4008597457838
Poids brut du carton en kg	0.347
Longueur box in m	0.244
Largeur du carton en m	0.114
Hauteur du carton en m	0.083
Product weight	17 g
Product status	● PhaseOut

Electric Parameters

Wattage	1000.0 W
Lamp nominal wattage	1 kW
Weighted energy consumption in 1000 hours	1000 kWh
Power factor	1.00
Lamp voltage	240-240 V

Halogen lamp for stage lighting

RJH-TS 1000W/240/C/R7S

Radium

Electric Parameters

Mains voltage	240 V
Lamp's nominal current	4.17 A
dimnable	Oui

Light Application Parameters

Luminous flux	22000 lm
Rated lamp luminous flux	22000 lm
Efficacy / Luminous efficiency	22 lm/W
Colour temperature	2900 K
Color rendering index	100

Service Life

Average life	2000 h
No. switching cycles	50000

Specification

Energylabel notice	old label, no EPREL registration, no EU data sheet
Energylabel (G -> A)	G
Energylabel (E -> A++)	C
Diameter	12 mm
Total length max.	185.7 mm
Contact distance I	185.7 mm
Burning position	p15
Mercury content	0.0 mg
Lamp shape	Tube, double-ended
Model	Clear
Base	R7s

Notes on Operation

Burning position	p15
------------------	-----

Information especially for EPREL

Energylabel notice	old label, no EPREL registration, no EU data sheet
EPREL ID number	588200

Miscellaneous

Halogen lamp for stage lighting

RJH-TS 1000W/240/C/R7S

Radium

Similar products

22315975

Halogen lamp for stage lighting

RJH-TS 1000W/240V/C/R7S

Radium

Notes

High-voltage halogen lamp for stage lighting, clear tube shape, 240V, double-ended socket, R7s base, continuously dimmable, 2000h lifespan.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Culot




R7s
IEC/EN 60061-1
sheet 7004-92A-4

Courbes spectrales


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament. The addition of halogens to the filling gas enhance the efficiency and prevents blackening. Further increase in efficiency can be achieved by adding Xenon and/or IRC-coating.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

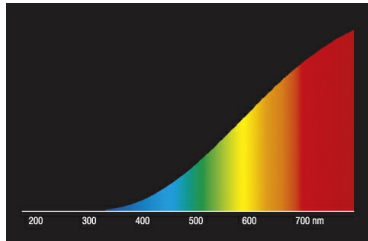


light of incandescent lamps

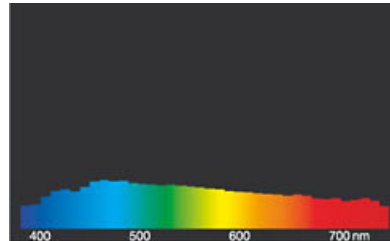

daylight(D 65)

Particularités



Notices explicatives générales

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefs) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.