


# Aluminium wing profile for LED stripe

## Slim Track-F 22/12/T13I

# Radium

Product Datasheet Date: 02.04.2026

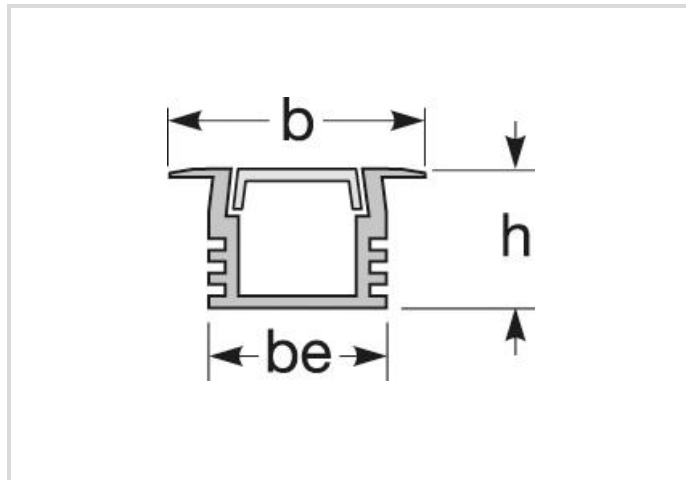

## General Data

Code Radium	TRSA1845
Désignation	PROFILE S WING 22/12/B3C3 P 3M
EAN 10 (unité)	4052899448988
Unité de transport (pièces)	20
EAN 40 (carton)	4052899448995
Poids brut du carton en kg	10.38
Longueur box in m	3.02
Largeur du carton en m	0.1
Hauteur du carton en m	0.1
Product weight	468 g
Product status	<span style="color: red;">●</span> Inactif

## Specification

Type of accessory/spare part	Profile
Length max.	3000 mm
Length	3 m
Height	12 mm
Width	22 mm
Built-in width	16 mm
Internal width	11.2 mm
Material	Aluminium
no. of LED stripes in profile	1
Product shape	F

# Aluminium wing profile for LED stripe

Slim Track-F 22/12/T13I

**Radium**

## Notes on Operation

---

Fitting Endcap	ZTPA2612, ZTPA2719, ZTPA4411
Fitting Cover	FXZA1851
Fitting mounting clips or suspension	FXZA1854

## Miscellaneous

---

Similar products	TRPA2523
------------------	----------

## Notes

For cooling and protection of LED Flex modules, width for 1 module, suitable for different mounting types (brackets, clips etc.), length adjustable.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

### Notices explicatives générales

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.