


# LED Essence Tube

RL-T8 58 19,1W/865/G13 EM

# Radium

Product Datasheet Date: 30.05.2026

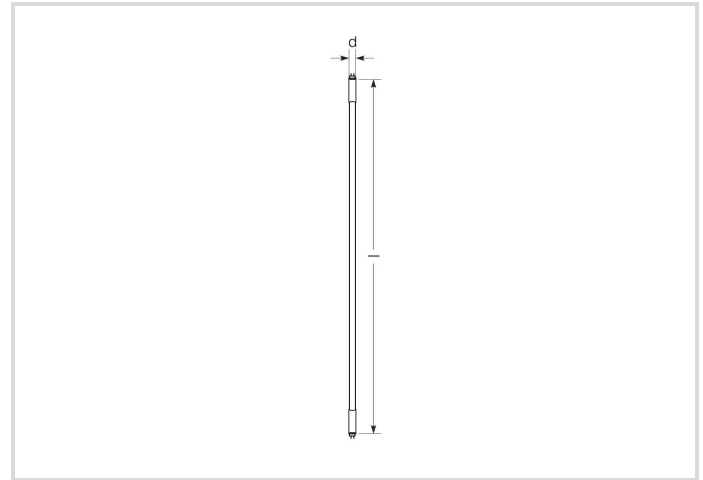

A+



19,1



2000



6500K



25 000h

## General Data

|                             |  |
|-----------------------------|--|
| Code Radium                 | 43419534                                   |
| Désignation                 | RL-T8 58 865 EM                            |
| EAN 10 (unité)              | 4008597195341                              |
| Unité de transport (pièces) | 10   |
| EAN 40 (carton)             | 4008597495342                              |
| Poids brut du carton en kg  | 3.732                                      |
| Longueur box in m           | 1.65                                       |
| Largeur du carton en m      | 0.21                                       |
| Hauteur du carton en m      | 0.12                                       |
| Product weight              | 260 g                                      |
| Product status              | <span style="color: red;">●</span> Inactif |

## Electric Parameters

|   |             |
|---|-------------|
| Wattage                                   | 19.1 W      |
| Nominal power                             | 19.1 W      |
| Weighted energy consumption in 1000 hours | 19,1 kWh    |
| Lamp power                                | 19.1-19.1 W |
| Nominal voltage                           | 220-240 V   |

## Electric Parameters

|                      |          |
|----------------------|----------|
| Voltage type         | AC       |
| Nominal current      | 88-88 mA |
| Nominal current (mA) | 88 mA    |
| dimnable             | Non      |

## Light Application Parameters

|                                |             |
|--------------------------------|-------------|
| Rated lamp luminous flux       | 2000 lm     |
| Beam angle                     | 190 °       |
| Efficacy / Luminous efficiency | 104,71 lm/W |
| Total mains efficacy           | 104.71 lm/W |
| Color temperature              | 6500 K      |
| Color rendering index          | ≥ 80        |
| Color Stability                | ≤ 6 sdcn    |

## Service Life

|                             |         |
|-----------------------------|---------|
| Average life                | 25000 h |
| Mean service life           | 30000 h |
| No. switching cycles        | 200000  |
| Early failure rate at 1000h | ≤ 5.0 % |

## Specification

|  |  |
|--|--|
| Energylabel notice                           | old label, no EPREL registration, no EU data sheet |
| Energylabel (E -> A++)                       | A+   |
| Diameter                                     | 27 mm  |
| Tube diameter                                | 26 mm  |
| Length                                       | 1500 mm  |
| Length                                       | 1500 mm  |
| Burning position                             | any  |
| Mercury content                              | 0.0 mg   |
| Material                                     | Glass  |
| Shatterproof                                 | Non  |
| Photobiological safety according to EN 62471 | RG0  |
| Lamp shape                                   | Tube, double-ended                                 |
| Base   | G13  |
| Colour                                       | White  |

# LED Essence Tube

RL-T8 58 19,1W/865/G13 EM

# Radium

## Notes on Operation

|                              |               |
|------------------------------|---------------|
| Degree of protection (IP)    | IP20          |
| Burning position             | any           |
| Mode of operation            | CCG, 230V     |
| Range of storage temperature | -20...+80 °C  |
| Ambient temperatures         | -20 ... +45°C |
| With movement sensor         | Non           |

## Information especially for EPREL

|                                      |  |
|--------------------------------------|--|
| Energylabel notice                   | old label, no EPREL registration, no EU data sheet |
| Lighting technology                  | LED  |
| Mains/Non mains connectable          | MLS  |
| Directional or non-directional light | NDLS   |
| Color tunable light source           | Non  |
| Type of color temperature            | SINGLE_VALUE                                       |
| Displacement factor EPREL            | 0,7  |
| Life factor EPREL                    | 0.9  |
| Lumen maintenance EPREL              | 0.96   |
| Flicker                              | 1.0  |
| Stroboscopic effect                  | 0.4  |

## Notes


T8 tubular LED lamp for exchange with fluorescent lamps, daylight, glass bulb, non-dim, base G13. Please, note installation instructions!

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

### Culot



G13  
IEC/EN 60061-1  
sheet 7004-51-8

### Courbes spectrales

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.


White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

# LED Essence Tube

RL-T8 58 19,1W/865/G13 EM

# Radium

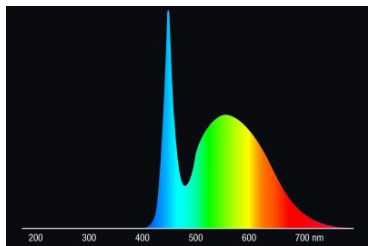

LED-Retrofit-Tube-Lampen für Leuchtstofflampen 6500K



daylight(D 65)

## Particularités



## Notices explicatives générales

Please note the installation instructions when replacing fluorescent lamps with LED tubes. Some LED lamp types are only suitable for 1: 1 replacement at the respective burning position: with CCG by using the enclosed starter, with ECG with compatible control gear. Others can be operated directly on 230V (conversion of the luminaire), others again can 'do' CCG as well as 230V or all 3 variations. Neo tubes need an external LED driver (replacement of the control gear). LED Neo tubes are dimmable, all other LED tubes are not dimmable.

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefs) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

## Consignes de sécurité

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.