


# LED Essence Long - Retrofit for Ralux

RL-LONG36 840/2G11 UN

# Radium

Product Datasheet Date: 30.05.2026

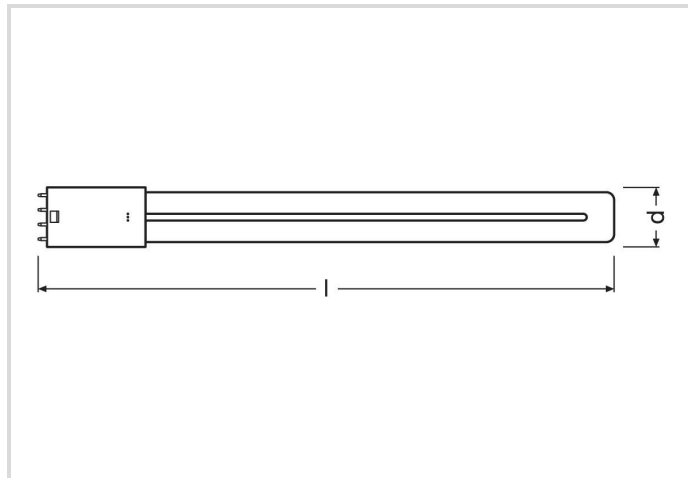

E

18

2300

4000K

30 000h

3  
YEARS  
GUARANTEE

## General Data

Code Radium	43520574
Désignation	RL-LONG36 840/2G11 UN
EAN 10 (unité)	4008597205743
Unité de transport (pièces)	10
EAN 40 (carton)	4008597605741
Poids brut du carton en kg	2.151
Longueur box in m	0.47
Largeur du carton en m	0.243
Hauteur du carton en m	0.074
Product weight	134 g
Product status	● Actif

## Electric Parameters

Wattage	18.0 W
Nominal power	18.0 W
Weighted energy consumption in 1000 hours	18 kWh
Lamp power	18.0-18.0 W
Power factor	> 0.9

## Electric Parameters

Nominal voltage	220-240 V
Mains Voltage	220 - 240 V
Voltage type	AC
Nominal current	79-79 mA
Nominal current (mA)	79 mA
Inrush current	< 25 A
Total harmonic distortion	0.3
max. no. of lamps at 10A-B10 automatic fuse	110
max. no. of lamps at 16A-B16 automatic fuse	180
dimnable	Non

## Light Application Parameters

Luminous flux	2300 lm
Rated lamp luminous flux	2300 lm
Luminous flux	2300 lm
Beam angle	140 °
Efficacy / Luminous efficiency	128 lm/W
Total mains efficacy	118 lm/W
Color temperature	4000 K
Color coordinate X	0,381
Color coordinate Y	0,379
Color rendering index	≥ 80
Color rendering index nominal	80
Color Stability	≤ 6 sdc <sub>m</sub>

## Service Life

Average life	30000 h
T <sub>c</sub> Temperature max.	75 °C
Mean service life	30000 h
No. switching cycles	200000
Lamp survival factor at 6000h	≥ 0.90
Early failure rate at 1000h	≤ 5.0 %
Guarantee	3 years

## Specification

Energylabel notice	current label, with EPREL registration
Energylabel (G -> A)	E
Diameter	44 mm
Length	417 mm
Length	417 mm
Burning position	any
Mercury content	0.0 mg
Photobiological safety according to EN 62471	RG0
Lamp shape	Tube, single-ended
Base	2G11
Colour	White

## Notes on Operation

Degree of protection (IP)	IP20
Burning position	any
Mode of operation	ECG, 230V
suitable for tandem circuit	Non
Ambient temperatures	-20 ... +50 °C
Tc Temperature max.	75 °C
With movement sensor	Non

## Information especially for EPREL

Energylabel notice	current label, with EPREL registration
Lighting technology	LED
Mains/Non mains connectable	MLS
Directional or non-directional light	NDLS
Color tunable light source	Non
Type of color temperature	SINGLE_VALUE
Color stability MacAdams EPREL	6
Displacement factor EPREL	0,9
Life factor EPREL	0,9
Lumen maintenance EPREL	0,7
Flicker	1.0
Stroboscopic effect	0.4
EPREL ID number	541527

## Miscellaneous

Similar products

31320388

## Notes

LED compact lamp for exchange with Ralux Long, neutral white light, glass bulb, non-dim, base 2G11.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

## Culot



2G11  
IEC/EN 60061-1  
sheet 7004-82-1


## Courbes spectrales

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.


The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

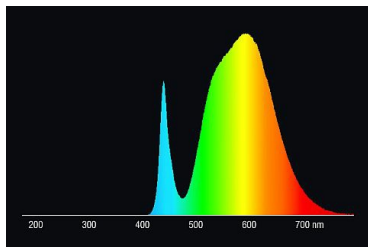


LED retrofit lamps 4000K

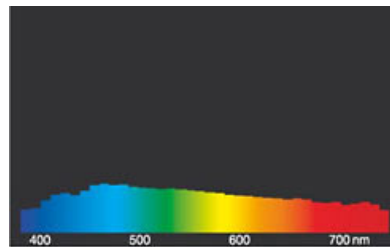

daylight(D 65)

## Particularités



## Notices explicatives générales

When replacing Ralux Long with LED lamps, we recommend the simple and uncomplicated replacement (1: 1) at the respective light spot without rewiring (ECG remains in circuit). Please observe the compatibility list. Operation at mains voltage directly would also be possible. RL-Long lamps are not suitable for application with KVG or VVG, nor are they suitable for tandem operation. An ambient temperature of the lamp of 35 ° C inside the luminaire must not be exceeded. Outdoor use is only permitted with suitable luminaires (IP protection).

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

# LED Essence Long - Retrofit for Ralux

RL-LONG36 840/2G11 UN

# Radium

Subject to change without notice. Errors and omissions excepted.

## Consignes de sécurité

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.