



General Data

Code Radium	43819752
Désignation	RL-HRL250 840/E40 EM
EAN 10 (unité)	4008597197529
Unité de transport (pièces)	6
EAN 40 (carton)	4008597597527
Poids brut du carton en kg	9.284
Longueur box in m	0.36
Largeur du carton en m	0.245
Hauteur du carton en m	0.32
Product weight	1380 g
Product status	● PhaseOut

Electric Parameters

Nominal power	90.0 W
Weighted energy consumption in 1000 hours	90 kWh
Lamp power	90.0-90.0 W
Power factor	≥ 0.9
Nominal voltage	220-240 V

Electric Parameters

Mains Voltage	220 - 240 V
Voltage type	AC
Nominal current	410-410 mA
Nominal current (mA)	410 mA
Total harmonic distortion	0.2
max. no. of lamps at 10A-B10 automatic fuse	13
max. no. of lamps at 16A-B16 automatic fuse	21
dimnable	Non

Light Application Parameters

Luminous flux	13000 lm
Rated lamp luminous flux	13000 lm
Luminous flux	13000 lm
Beam angle	360 °
Efficacy / Luminous efficiency	144 lm/W
Total mains efficacy	144 lm/W
Light colour	coolwhite
Color temperature	4000 K
Color coordinate X	0,382
Color coordinate Y	0.380
Color rendering index	≥ 80
Color rendering index nominal	80
Color Stability	≤ 6 sdcn

Service Life

Average life	50000 h
Tc Temperature max.	95 °C
Mean service life	50000 h
No. switching cycles	[100000]
Lamp survival factor at 6000h	≥ 0.90
Early failure rate at 1000h	≤ 1.0 %
Guarantee	5 years

Specification

Energylabell notice	current label, with EPREL registration
Diameter	110 mm

Specification

Length	270 mm
Length	270 mm
Burning position	any
Mercury content	0.0 mg
Material	Glass
Photobiological safety according to EN 62471	RG1
Lamp shape	Tube, single-ended
Base	E40
Colour	White

Notes on Operation

Degree of protection (IP)	IP65
Burning position	any
Mode of operation	CCG, 230V
Ambient temperatures	-20 ... +50 °C
Tc Temperature max.	95 °C
With movement sensor	Non

Information especially for EPREL

Energylabel notice	current label, with EPREL registration
Lighting technology	LED
Mains/Non mains connectable	MLS
Directional or non-directional light	NDLS
Color tunable light source	Non
Type of color temperature	SINGLE_VALUE
Color stability MacAdams EPREL	6
Displacement factor EPREL	0,9
Life factor EPREL	0,9
Lumen maintenance EPREL	0,7
Flicker	1.0
Stroboscopic effect	0.40
EPREL ID number	541612

Notes

LED lamp for exchange with mercury lamps (HPM), non-dim, base E40. Operation with ballast (1:1 replacement) or without (= with 230V). No UV or IR.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Culot



E40
IEC/EN 60061-1
sheet 7004-24-6


Courbes spectrales

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

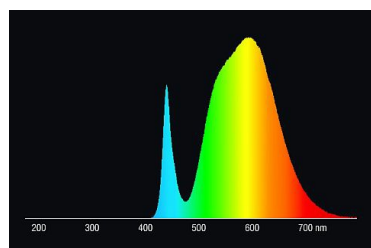

LED retrofit lamps 4000K



daylight(D 65)

Particularités



Notices explicatives générales

When replacing mercury vapor lamps HRL with LED lamps, we recommend replacement at the respective light point with operation at mains voltage directly (disconnect ballast, for lamps with article no. 426...), newer generations may also be replaced 1:1 (ballast remains in luminaire, lamps with article no. 43...) An ambient temperature of the lamp of 60 ° C inside the luminaire must not be exceeded. Outdoor use is permitted (IP65).

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

Consignes de sécurité

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated

LED HPM-Retrofit
RL-HRL250 840/E40

Radium

with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.