

# LED Essence Drop, frosted

RL-D40 830/F/E14

# Radium

Product Datasheet Date: 31.05.2026



E



4,2



3000K



15 000h



4 YEARS  
GUARANTEE

## General Data

Code Radium	44120815
Désignation	RL-D40 830/F/E14
EAN 10 (unité)	4008597208157
Unité de transport (pièces)	10
EAN 40 (carton)	4008597508158
Poids brut du carton en kg	0.3
Longueur box in m	0.24
Largeur du carton en m	0.101
Hauteur du carton en m	0.108
Product weight	13 g
Product status	● Actif

## Electric Parameters

Wattage	4.2 W
Nominal power	4.2 W
Weighted energy consumption in 1000 hours	5 kWh
Lamp power	4.2 W
Power factor	> 0.5

## Electric Parameters

Nominal voltage	220-240 V
Voltage type	AC
Nominal current	35 mA
Nominal current (mA)	35 mA
Inrush current	3.76 A
max. no. of lamps at 10A-B10 automatic fuse	209
max. no. of lamps at 16A-B16 automatic fuse	335
dimnable	Non

## Light Application Parameters

Luminous flux	470 lm
Rated luminous flux according to IEC 62612	470 lm
Luminous flux	470 lm
Beam angle	330 °
Efficacy / Luminous efficiency	112 lm/W
Total mains efficacy	112 lm/W
Color temperature	3000 K
Color coordinate X	0,434
Color coordinate Y	0,403
Color rendering index	≥ 80
Color Stability	≤ 6 sdc <sub>m</sub>

## Service Life

Average life	15000 h
T <sub>c</sub> Temperature max.	85 °C
Mean service life	15000
Min. number of switching cycles	100000
Guarantee	4 years

## Specification

Energylabel (G -> A)	E
Diameter	45 mm
Length	80 mm
Length	80 mm
Burning position	any
Mercury content	0.0 mg

## Specification

Material	Glass
Photobiological safety according to EN 62471	RG1
Lamp shape	Pear-shape
Base	E14
Colour	Other

## Notes on Operation

Degree of protection (IP)	IP20
Burning position	any
Mode of operation	230 V
Ambient temperatures	-20 ... +40 °C
Tc Temperature max.	85 °C
With movement sensor	Non

## Information especially for EPREL

Lighting technology	LED
Mains/Non mains connectable	MLS
Directional or non-directional light	NDLS
Color tunable light source	Non
Type of color temperature	SINGLE_VALUE
Color stability MacAdams EPREL	6
Displacement factor EPREL	0,4
Life factor EPREL	0.9
Lumen maintenance EPREL	0.9
Flicker	1.0
Stroboscopic effect	0.4
EPREL ID number	1630718

## Miscellaneous

Similar products	44120840, 43920149, 44020824
------------------	------------------------------

## Notes

LED mini ball lamp for exchange with incandescent lamps, coated, non-dim, base E14. LED light does not contain UV or IR radiation.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage. The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

# LED Essence Drop, frosted

RL-D40 830/F/E14

# Radium

## Culot




E14  
IEC/EN 60061-1  
sheet 7004-23-6

## Courbes spectrales


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin. Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.



LED Retrofit retrofit lamps 3000K

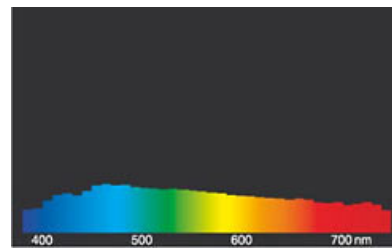

daylight(D 65)

## Particularités



Separer les elements avant de jeter.



Points de collecte sur [www.quefairemedesdechets.fr](http://www.quefairemedesdechets.fr)

## Notices explicatives générales

For LED replacement of halogen and incandescent lamps, we recommend direct replacement (1: 1) at the respective burning position. For new systems, the number of lamps in the circuit operated at control gear such as transformers or dimmers can be obtained from corresponding compatibility lists (if available). If there is no specification for the type of device or lamp required, for safety reasons, the replacement power shall be assumed as taht of the original halogen type (eg "RL-MR16 35" -> 35W, independent of the real power consumption).

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

## Consignes de sécurité

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.